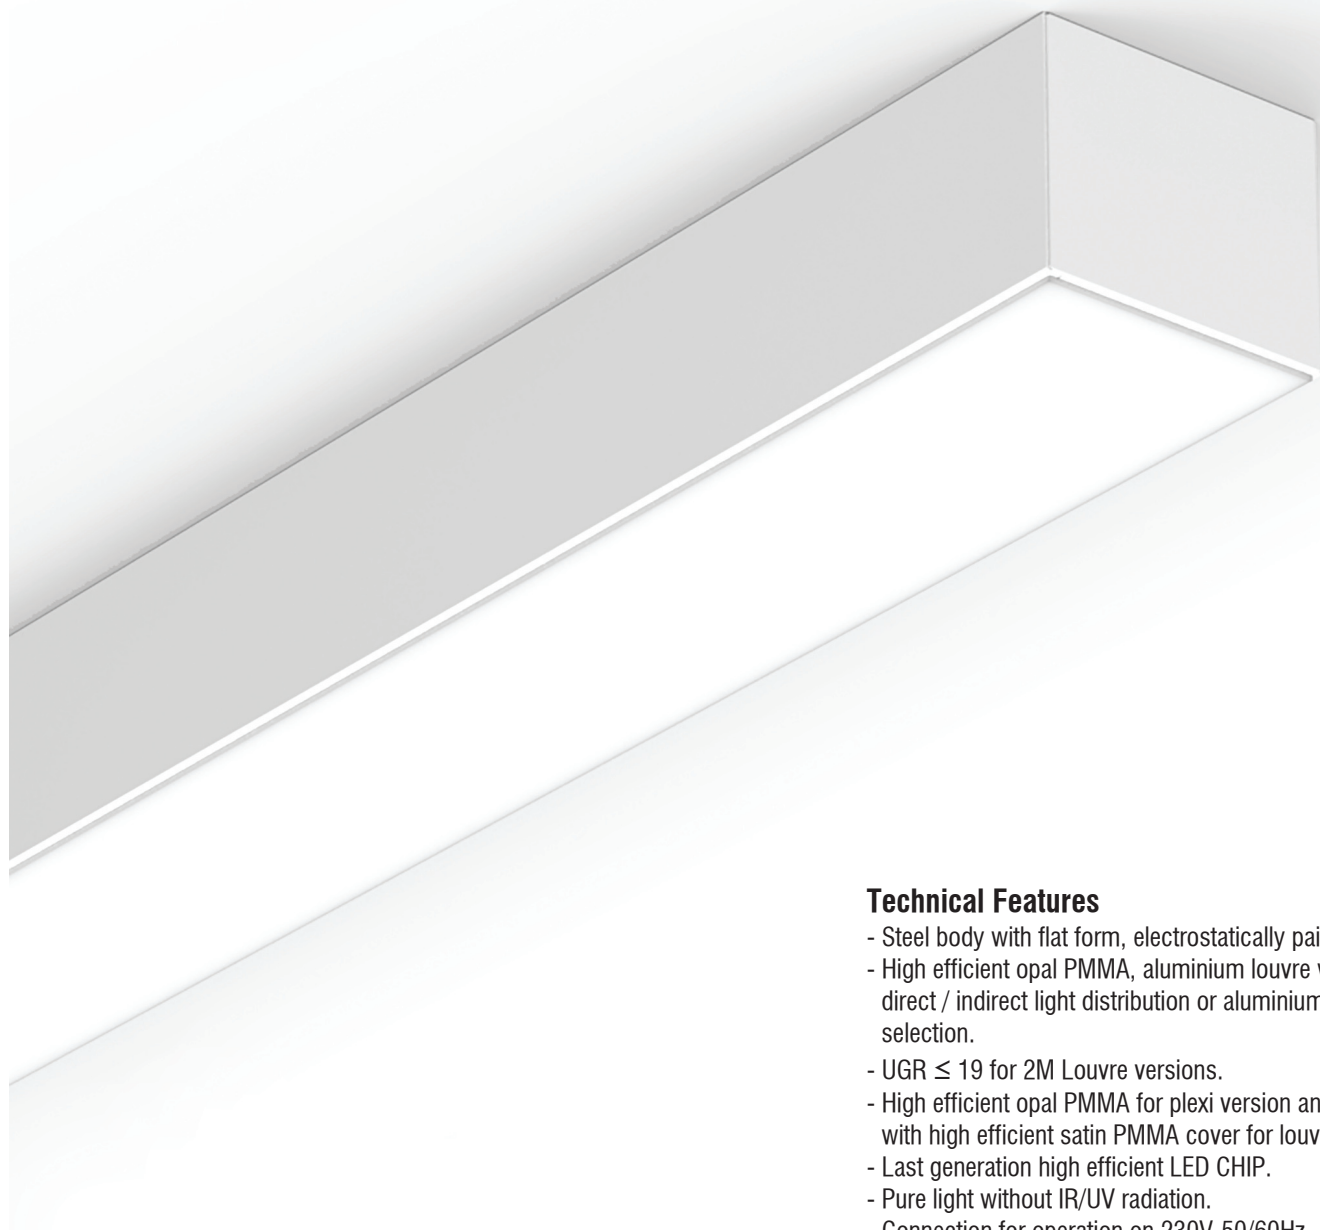


**Technical Features**

- Steel body with flat form, electrostatically painted in white colour.
- High efficient opal PMMA, aluminium louvre with direct or direct / indirect light distribution or aluminium WW reflector selection.
- $UGR \leq 19$ for 2M Louvre versions.
- High efficient opal PMMA for plexi version and aluminium louvre with high efficient satin PMMA cover for louvre version.
- Last generation high efficient LED CHIP.
- Pure light without IR/UV radiation.
- Connection for operation on 230V-50/60Hz.

High Efficiency

- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).

High Output




- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B50).

Upon request:

- Body and accessories in various colours (RAL)
- Connection for emergency lighting system, for one or three hours.

P100

P100 2M LED

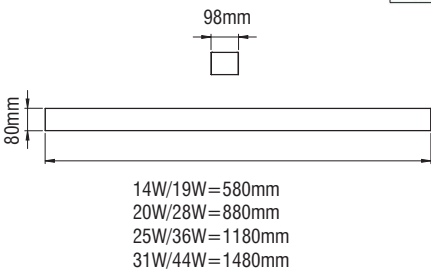
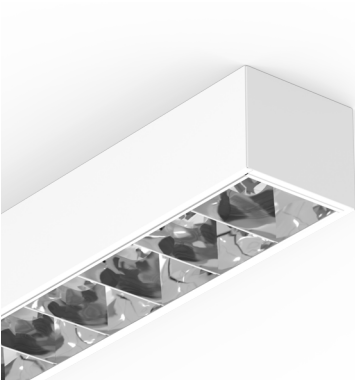


- Steel body.
- Aluminium louvre with high efficient satin PMMA cover for led source.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

Code	Description (High Efficiency 250mA)	L
251503	P101 2M LED 14W Warm	580
251513	P101 2M LED 14W Neutral	580
251543	P101 2M LED 20W Warm	880
251553	P101 2M LED 20W Neutral	880
251583	P101 2M LED 25W Warm	1180
251593	P101 2M LED 25W Neutral	1180
251623	P101 2M LED 31W Warm	1480
251633	P101 2M LED 31W Neutral	1480
Code	Description (High Output 350mA)	L
251523	P101 2M LED 19W Warm	580
251533	P101 2M LED 19W Neutral	580
251563	P101 2M LED 28W Warm	880
251573	P101 2M LED 28W Neutral	880
251603	P101 2M LED 36W Warm	1180
251613	P101 2M LED 36W Neutral	1180
251643	P101 2M LED 44W Warm	1480
251653	P101 2M LED 44W Neutral	1480

For dimmer version add letter “D” at the end of product code.

P100 PLEXI LED

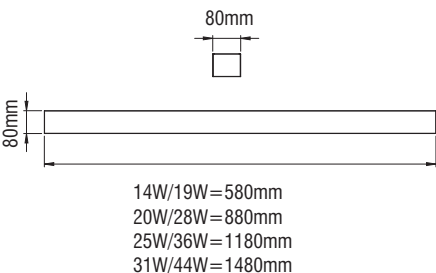


- Steel body.
- High efficient opal PMMA.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

Code	Description (High Efficiency 250mA)	L
252503	P101 Plexi LED 14W Warm	580
252513	P101 Plexi LED 14W Neutral	580
252543	P101 Plexi LED 20W Warm	880
252553	P101 Plexi LED 20W Neutral	880
252583	P101 Plexi LED 25W Warm	1180
252593	P101 Plexi LED 25W Neutral	1180
252623	P101 Plexi LED 31W Warm	1480
252633	P101 Plexi LED 31W Neutral	1480
Code	Description (High Output 350mA)	L
252523	P101 Plexi LED 19W Warm	580
252533	P101 Plexi LED 19W Neutral	580
252563	P101 Plexi LED 28W Warm	880
252573	P101 Plexi LED 28W Neutral	880
252603	P101 Plexi LED 36W Warm	1180
252613	P101 Plexi LED 36W Neutral	1180
252643	P101 Plexi LED 44W Warm	1480
252653	P101 Plexi LED 44W Neutral	1480

For dimmer version add letter “D” at the end of product code.

P100

SINGLE ADJUSTABLE SUSPENSION



- Stainless steel cable and regulators.
- **Required:**
2 pieces for up to 3m profile.

Code	Description	L	Kg
900111	Single Suspension	500	0,050
900112	Single Suspension	1000	0,100
900113	Single Suspension	1500	0,150
900114	Single Suspension	2000	0,200
900116	Single Suspension	3000	0,300

POWER SUPPLY



- Plastic body.
- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.

Code	Description	L	Kg
900122	Power Supply 3x0,75mm ² with Rosette Ø75	1000	0,120
900124	Power Supply 3x0,75mm ² with Rosette Ø75	2000	0,240
900126	Power Supply 3x0,75mm ² with Rosette Ø75	3000	0,360
900127	Power Supply 3x0,75mm ² with Rosette Ø75	4000	0,500
900162	Power Supply 5x0,50mm ² with Rosette Ø75	1000	0,120
900164	Power Supply 5x0,50mm ² with Rosette Ø75	2000	0,240
900166	Power Supply 5x0,50mm ² with Rosette Ø75	3000	0,360
900167	Power Supply 5x0,50mm ² with Rosette Ø75	4000	0,500

POWER SUPPLY



- For pendant use.
- Body from aluminium profile.
- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.
- Square or round version.

Code	Description	Kg
90042	Power Supply 3x0,75mm ² L 2m Ø80	0,130
90043	Power Supply 3x0,75mm ² L 2m Ø70	0,130
90044	Power Supply 3x0,75mm ² L 2m 80x80	0,210
90045	Power Supply 3x0,75mm ² L 2m 70x70	0,200
90048	Power Supply 5x0,50mm ² L 2m Ø100	0,250
90049	Power Supply 5x0,50mm ² L 2m 100x100	0,300

P100

PROFESSIONAL SURFACE & PENDANT LUMINAIRES

