



NEMESIS is an ideal solution for small showcases, homes, rest areas, museums, hotels, exhibition halls and generally for many decorative and architectural projects. Available in Medium and Wide light distribution can be the perfect tool for wide range of applications.

Technical Features

- Aluminium body, painted electrostatically in selected colour.
- Reflector in black colour (for standard version).
- Lens in Medium and Wide version.
- Pure light without IR/UV radiation.
- Low glare (UGR < 19).
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation with constant current.


Upon Request

- Available with highest colour rendering index (CRI).
- Reflector in matt white or matt silver colour.




NEMESIS

NEMESIS

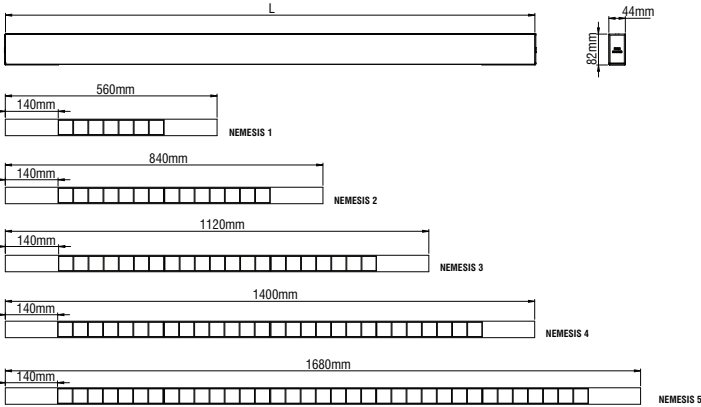


NEMESIS BL

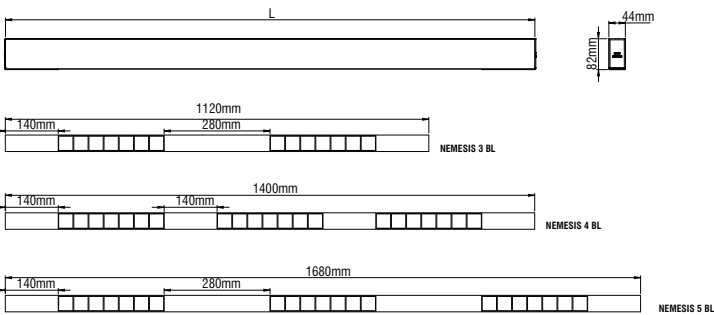

LED COLOUR CODES:	BEAM CODES:	Colour Codes:
2 Warm 3 Neutral	02 medium 03 wide	0 Colours 1 White 2 Titan 3 Black

PROFESSIONAL SURFACE & PENDANT LUMINAIRES

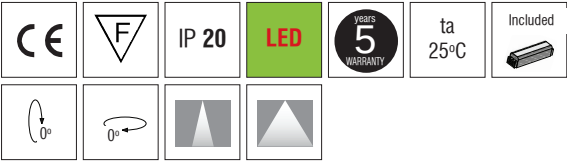

- Aluminium body.
- Lens in Medium and Wide version.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4000 K: 174 Lm/Watt
3000 K: 164 Lm/Watt

Code	Description	Kg
99811	NEMESIS 1 9W	1,400
99812	NEMESIS 2 17W	1,850
99813	NEMESIS 3 26W	2,400
99814	NEMESIS 4 34W	2,950
99815	NEMESIS 5 43W	3,450

For dimmer version add letter “D” at the end of product code.



- Aluminium body.
- Lens in Medium and Wide version.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4000 K: 174 Lm/Watt
3000 K: 164 Lm/Watt

Code	Description	Kg
99823	NEMESIS 3 BL 17W	2,380
99824	NEMESIS 4 BL 26W	2,930
99825	NEMESIS 5 BL 26W	3,410

For dimmer version add letter “D” at the end of product code.

NEMESIS

PROFESSIONAL SURFACE & PENDANT LUMINAIRES





NEMESIS

PROFESSIONAL SURFACE & PENDANT LUMINAIRES



NEMESIS

NEMESIS FP

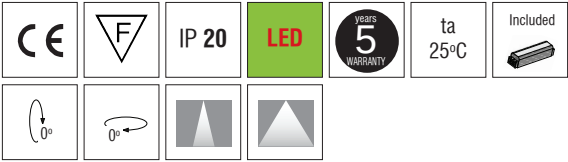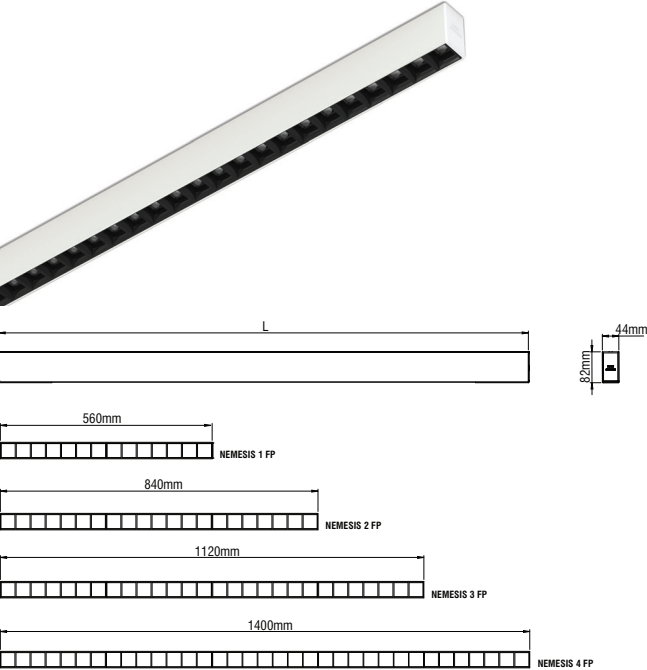


- Aluminium body.
- Lens in Medium and Wide version.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4000 K: 174 Lm/Watt
3000 K: 164 Lm/Watt

Code	Description	Kg
99871	NEMESIS 1 FP 17W	1,400
99872	NEMESIS 2 FP 26W	1,850
99873	NEMESIS 3 FP 34W	2,400
99874	NEMESIS 4 FP 43W	2,950

For dimmer version add letter “D” at the end of product code.

NEMESIS UP/DOWN

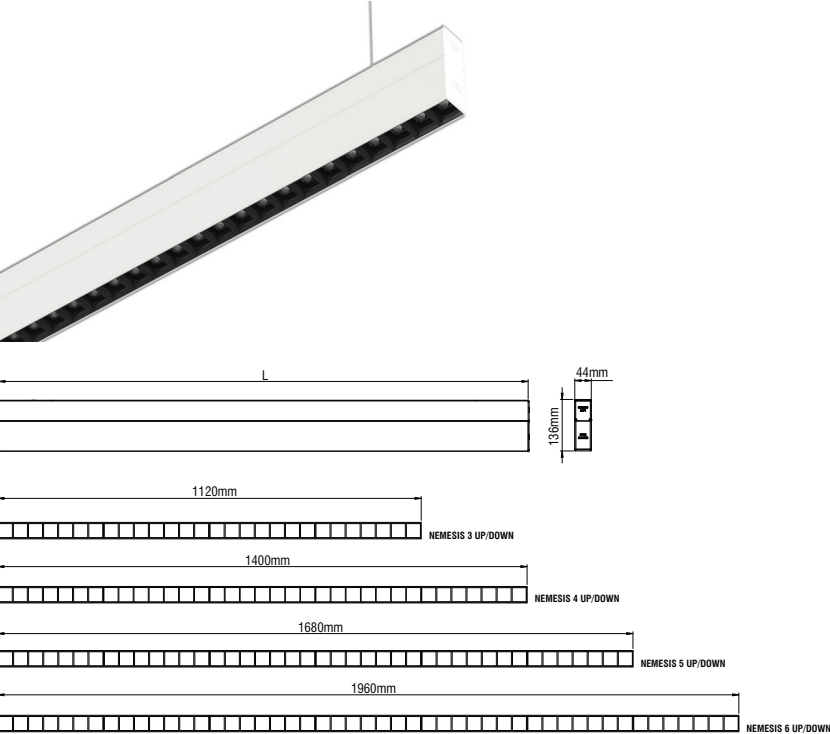

- Aluminium body.
- Lens in Medium and Wide version.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4000 K: 174 Lm/Watt
3000 K: 164 Lm/Watt

Code	Description	Kg
99892	NEMESIS 3 UP/DOWN 34+15W	3,680
99893	NEMESIS 4 UP/DOWN 43+20W	4,430
99894	NEMESIS 5 UP/DOWN 52+25W	4,810
99895	NEMESIS 6 UP/DOWN 60+30W	5,410

For dimmer version add letter “D” at the end of product code.

LED COLOUR CODES: 2 Warm 3 Neutral	BEAM CODES: 02 medium 03 wide	Colour Codes: 0 Colours 1 White 2 Titan 3 Black
--	---	---

NEMESIS


TRUNKING CONNECTORS



END CAP



SINGLE ADJUSTABLE SUSPENSION




POWER SUPPLY



POWER SUPPLY



CABLE CONNECTIONS



Colour Codes:

0 Colours 1 White 2 Titan 3 Black

PROFESSIONAL SURFACE & PENDANT LUMINAIRES



- Aluminium Trunking Connectors.

Code	Description
968255	Trunking Metal Connectors pair



- Plastic end cap without screws.

Code	Description	Kg
90591	High System End Cap (pair) Surface	0,010
90597	End Cap (pair) Surface (for Nemesis Up/Down)	0,015



- Stainless steel cable and regulators.

- **Required:**
2 pieces for up to 3m profile.

Code	Description	L	Kg
900111	Single Suspension	500	0,050
900112	Single Suspension	1000	0,100
900113	Single Suspension	1500	0,150
900114	Single Suspension	2000	0,200
900116	Single Suspension	3000	0,300



- Plastic body.

- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.

Code	Description	L	Kg
900122	Power Supply 3x0,75mm ² with Rosette Ø75	1000	0,120
900124	Power Supply 3x0,75mm ² with Rosette Ø75	2000	0,240
900126	Power Supply 3x0,75mm ² with Rosette Ø75	3000	0,360
900127	Power Supply 3x0,75mm ² with Rosette Ø75	4000	0,500
900162	Power Supply 5x0,50mm ² with Rosette Ø75	1000	0,120
900164	Power Supply 5x0,50mm ² with Rosette Ø75	2000	0,240
900166	Power Supply 5x0,50mm ² with Rosette Ø75	3000	0,360
900167	Power Supply 5x0,50mm ² with Rosette Ø75	4000	0,500



- For pendant use.

- **Standard version:** Rosette from aluminium profile with 2m transparent cable 3x0,75mm² or 5x0,50mm² for dimmer or emergency versions in square or round version.



- **Up/Down version:** Rosette from aluminium profile with 2m transparent cable 5x0,50mm² or 8x0,50mm² for dimmer or emergency versions in square or round version.

Code	Description	Kg
90042	Power Supply 3x0,75mm ² L 2m Ø80	0,130
90043	Power Supply 3x0,75mm ² L 2m Ø70	0,130
90044	Power Supply 3x0,75mm ² L 2m 80x80	0,210
90045	Power Supply 3x0,75mm ² L 2m 70x70	0,200
90048	Power Supply 5x0,50mm ² L 2m Ø100	0,250
90049	Power Supply 5x0,50mm ² L 2m 100x100	0,300
90052	Power Supply 8x0,50mm ² L 2m Ø100	0,280
90053	Power Supply 8x0,50mm ² L 2m 100x100	0,330



- PTFE cable connenctions.

- 3pole for standard version and 5pole for dimmer.

Code	Description	L	Kg
996510	Cable connections 3x0,75mm ² /m		0,200
996511	Cable connections 3x0,75mm ²	1500	0,280
996512	Cable connections 3x0,75mm ²	2500	0,380
996520	Cable connections 5x0,75mm ² /m		0,230
996521	Cable connections 5x0,75mm ²	1500	0,300
996522	Cable connections 5x0,75mm ²	2500	0,440