



Technical Features

- Steel body with polygonal form, electrostatically painted in white colour.
- High efficient opal PMMA for PSPO Led, microprismatic and aluminium louvre with high efficient satin PMMA cover for louvre version.
- Last generation high efficient LED CHIP.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- UGR<19 at specific editions:
Glare Evaluation: X=4H/ Y=8H S=0,25H, reflection factors 70/50/20.
For DSE work stations: $\gamma \geq 65^\circ$ <3000cd/m².
- Connection for operation on 230V/50-60Hz.

Upon request:

- Body and accessories in various colours (RAL)
- Connection for emergency lighting system, for one or three hours.

PRISMA

PRISMA P2M LED




- Steel body.
- Screen 2M with high efficient satin PMMA cover for led source.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

Code	Description (High Efficiency 250mA)	L
221403	P2M 261 LED 14W Warm	647
221413	P2M 261 LED 14W Neutral	647
221443	P2M 261 LED 25W Warm	1257
221453	P2M 261 LED 25W Neutral	1257
221483	P2M 261 LED 31W Warm	1557
221493	P2M 261 LED 31W Neutral	1557
231803	P2M 272 LED 25W Warm	647
231813	P2M 272 LED 25W Neutral	647
231843	P2M 272 LED 49W Warm	1257
231853	P2M 272 LED 49W Neutral	1257
231883	P2M 272 LED 60W Warm	1557
231893	P2M 272 LED 60W Neutral	1557
241803	P2M 262 LED 25W Warm	647
241813	P2M 262 LED 25W Neutral	647
241843	P2M 262 LED 49W Warm	1257
241853	P2M 262 LED 49W Neutral	1257
241883	P2M 262 LED 60W Warm	1557
241893	P2M 262 LED 60W Neutral	1557
241923	P2M 264 LED 49W Warm	647
241933	P2M 264 LED 49W Neutral	647


Code	Description (High Output 350mA)	L
221423	P2M 261 LED 19W Warm	647
221433	P2M 261 LED 19W Neutral	647
221463	P2M 261 LED 36W Warm	1257
221473	P2M 261 LED 36W Neutral	1257
221503	P2M 261 LED 44W Warm	1557
221513	P2M 261 LED 44W Neutral	1557
231823	P2M 272 LED 36W Warm	647
231833	P2M 272 LED 36W Neutral	647
231863	P2M 272 LED 70W Warm	1257
231873	P2M 272 LED 70W Neutral	1257
231903	P2M 272 LED 86W Warm	1557
231913	P2M 272 LED 86W Neutral	1557
241823	P2M 262 LED 36W Warm	647
241833	P2M 262 LED 36W Neutral	647
241863	P2M 262 LED 70W Warm	1257
241873	P2M 262 LED 70W Neutral	1257
241903	P2M 262 LED 86W Warm	1557
241913	P2M 262 LED 86W Neutral	1557
241943	P2M 264 LED 70W Warm	647
241953	P2M 264 LED 70W Neutral	647

For dimmer version add letter “D” at the end of product code.


P2M 261




P2M 262



P2M 264




P2M 272



PRISMA

PRISMA P3M LED

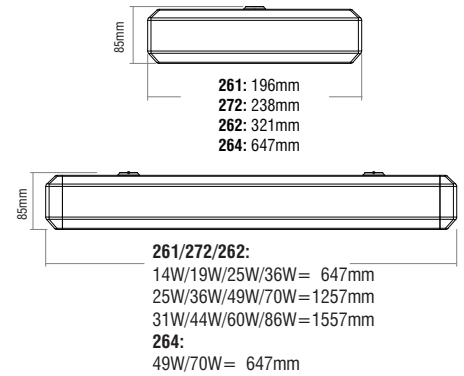

- Steel body.
- Screen 3M with high efficient satin PMMA cover for led source.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

Code	Description (High Efficiency 250mA)	L
223403	P3M 261 LED 14W Warm	647
223413	P3M 261 LED 14W Neutral	647
223443	P3M 261 LED 25W Warm	1257
223453	P3M 261 LED 25W Neutral	1257
223483	P3M 261 LED 31W Warm	1557
223493	P3M 261 LED 31W Neutral	1557

233803	P3M 272 LED 25W Warm	647
233813	P3M 272 LED 25W Neutral	647
233843	P3M 272 LED 49W Warm	1257
233853	P3M 272 LED 49W Neutral	1257
233883	P3M 272 LED 60W Warm	1557
233893	P3M 272 LED 60W Neutral	1557

243803	P3M 262 LED 25W Warm	647
243813	P3M 262 LED 25W Neutral	647
243843	P3M 262 LED 49W Warm	1257
243853	P3M 262 LED 49W Neutral	1257
243883	P3M 262 LED 60W Warm	1557
243893	P3M 262 LED 60W Neutral	1557

243923	P3M 264 LED 49W Warm	647
243933	P3M 264 LED 49W Neutral	647

Code	Description (High Output 350mA)	L
223423	P3M 261 LED 19W Warm	647
223433	P3M 261 LED 19W Neutral	647
223463	P3M 261 LED 36W Warm	1257
223473	P3M 261 LED 36W Neutral	1257
223503	P3M 261 LED 44W Warm	1557
223513	P3M 261 LED 44W Neutral	1557


233823	P3M 272 LED 36W Warm	647
233833	P3M 272 LED 36W Neutral	647
233863	P3M 272 LED 70W Warm	1257
233873	P3M 272 LED 70W Neutral	1257
233903	P3M 272 LED 86W Warm	1557
233913	P3M 272 LED 86W Neutral	1557

243823	P3M 262 LED 36W Warm	647
243833	P3M 262 LED 36W Neutral	647
243863	P3M 262 LED 70W Warm	1257
243873	P3M 262 LED 70W Neutral	1257
243903	P3M 262 LED 86W Warm	1557
243913	P3M 262 LED 86W Neutral	1557


243943	P3M 264 LED 70W Warm	647
243953	P3M 264 LED 70W Neutral	647

For dimmer version add letter "D" at the end of product code.


P3M 261




P3M 262



P3M 264




P3M 272



PRISMA

PRISMA PSPO LED

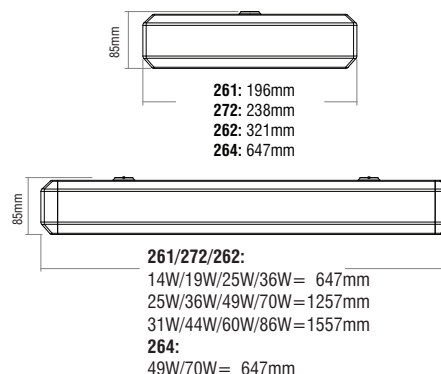

- Steel body.
- High efficient satin PMMA cover.
- Frame made of white painted steel, with steel springs for adjusting the cover to the body of the luminaire.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy at 261/ 272/ 262 editions:
High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K

- High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K
- Luminous Efficacy at 264 edition:
High Efficiency - 189 Lm/Watt 4000K
182 Lm/Watt 3000K
- High Output - 179 Lm/Watt 4000K
172 Lm/Watt 3000K

Code	Description (High Efficiency 250mA)	L
220403	PSPO 261 LED 14W Warm	647
220413	PSPO 261 LED 14W Neutral	647
220443	PSPO 261 LED 25W Warm	1257
220453	PSPO 261 LED 25W Neutral	1257
220483	PSPO 261 LED 31W Warm	1557
220493	PSPO 261 LED 31W Neutral	1557

230803	PSPO 272 LED 25W Warm	647
230813	PSPO 272 LED 25W Neutral	647
230843	PSPO 272 LED 49W Warm	1257
230853	PSPO 272 LED 49W Neutral	1257
230883	PSPO 272 LED 60W Warm	1557
230893	PSPO 272 LED 60W Neutral	1557

240803	PSPO 262 LED 25W Warm	647
240813	PSPO 262 LED 25W Neutral	647
240843	PSPO 262 LED 49W Warm	1257
240853	PSPO 262 LED 49W Neutral	1257
240883	PSPO 262 LED 60W Warm	1557
240893	PSPO 262 LED 60W Neutral	1557

Code	Description (High Efficiency 350mA)	L
240923	PSPO 264 LED 33W Warm	647
240933	PSPO 264 LED 33W Neutral	647

Code	Description (High Output 350mA)	L
220423	PSPO 261 LED 19W Warm	647
220433	PSPO 261 LED 19W Neutral	647
220463	PSPO 261 LED 36W Warm	1257
220473	PSPO 261 LED 36W Neutral	1257
220503	PSPO 261 LED 44W Warm	1557
220513	PSPO 261 LED 44W Neutral	1557


230823	PSPO 272 LED 36W Warm	647
230833	PSPO 272 LED 36W Neutral	647
230863	PSPO 272 LED 70W Warm	1257
230873	PSPO 272 LED 70W Neutral	1257
230903	PSPO 272 LED 86W Warm	1557
230913	PSPO 272 LED 86W Neutral	1557

240823	PSPO 262 LED 36W Warm	647
240833	PSPO 262 LED 36W Neutral	647
240863	PSPO 262 LED 70W Warm	1257
240873	PSPO 262 LED 70W Neutral	1257
240903	PSPO 262 LED 86W Warm	1557
240913	PSPO 262 LED 86W Neutral	1557


Code	Description (High Output 575mA)	L
240943	PSPO 264 LED 55W Warm	647
240953	PSPO 264 LED 55W Neutral	647

For dimmer version add letter "D" at the end of product code.


PSPO 261




PSPO 262



PSPO 264



PSPO 272





PRISMA

PRISMA MICROPRISMATIC LED



- Steel body.
- High efficient microprismatic PMMA cover.
- Frame made of white painted steel, with steel springs for adjusting the cover to the body of the luminaire.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy at 261/ 272/ 262 editions:
High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K

- High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K
- Luminous Efficacy at 264 edition:
High Efficiency - 189 Lm/Watt 4000K
182 Lm/Watt 3000K
- High Output - 179 Lm/Watt 4000K
172 Lm/Watt 3000K



261/272/262:
14W/19W/25W/36W= 647mm
25W/36W/49W/70W=1257mm
31W/44W/60W/86W=1557mm
264:
49W/70W= 647mm

Code	Description (High Efficiency 250mA)	L
224403	MICROPRISMATIC 261 LED 14W Warm	647
224413	MICROPRISMATIC 261 LED 14W Neutral	647
224443	MICROPRISMATIC 261 LED 25W Warm	1257
224453	MICROPRISMATIC 261 LED 25W Neutral	1257
224483	MICROPRISMATIC 261 LED 31W Warm	1557
224493	MICROPRISMATIC 261 LED 31W Neutral	1557

234803	MICROPRISMATIC 272 LED 25W Warm	647
234813	MICROPRISMATIC 272 LED 25W Neutral	647
234843	MICROPRISMATIC 272 LED 49W Warm	1257
234853	MICROPRISMATIC 272 LED 49W Neutral	1257
234883	MICROPRISMATIC 272 LED 60W Warm	1557
234893	MICROPRISMATIC 272 LED 60W Neutral	1557

244803	MICROPRISMATIC 262 LED 25W Warm	647
244813	MICROPRISMATIC 262 LED 25W Neutral	647
244843	MICROPRISMATIC 262 LED 49W Warm	1257
244853	MICROPRISMATIC 262 LED 49W Neutral	1257
244883	MICROPRISMATIC 262 LED 60W Warm	1557
244893	MICROPRISMATIC 262 LED 60W Neutral	1557

Code	Description (High Efficiency 350mA)	L
244923	MICROPRISMATIC 264 LED 33W Warm	647
244933	MICROPRISMATIC 264 LED 33W Neutral	647

Code	Description (High Output 350mA)	L
224423	MICROPRISMATIC 261 LED 19W Warm	647
224433	MICROPRISMATIC 261 LED 19W Neutral	647
224463	MICROPRISMATIC 261 LED 36W Warm	1257
224473	MICROPRISMATIC 261 LED 36W Neutral	1257
224503	MICROPRISMATIC 261 LED 44W Warm	1557
224513	MICROPRISMATIC 261 LED 44W Neutral	1557


234823	MICROPRISMATIC 272 LED 36W Warm	647
234833	MICROPRISMATIC 272 LED 36W Neutral	647
234863	MICROPRISMATIC 272 LED 70W Warm	1257
234873	MICROPRISMATIC 272 LED 70W Neutral	1257
234903	MICROPRISMATIC 272 LED 86W Warm	1557
234913	MICROPRISMATIC 272 LED 86W Neutral	1557

244823	MICROPRISMATIC 262 LED 36W Warm	647
244833	MICROPRISMATIC 262 LED 36W Neutral	647
244863	MICROPRISMATIC 262 LED 70W Warm	1257
244873	MICROPRISMATIC 262 LED 70W Neutral	1257
244903	MICROPRISMATIC 262 LED 86W Warm	1557
244913	MICROPRISMATIC 262 LED 86W Neutral	1557


Code	Description (High Output 575mA)	L
244943	MICROPRISMATIC 264 LED 55W Warm	647
244953	MICROPRISMATIC 264 LED 55W Neutral	647

For dimmer version add letter "D" at the end of product code.


MICROPRISMATIC 261




MICROPRISMATIC 262



MICROPRISMATIC 264




MICROPRISMATIC 272



PRISMA

PRISMA PSPO LED IP54

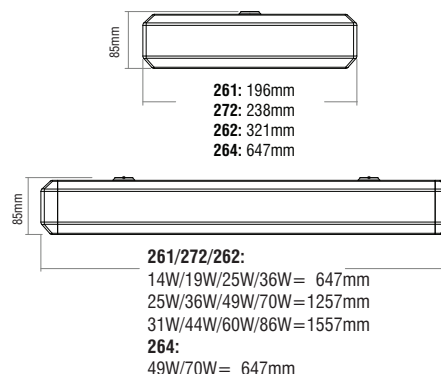

- Steel body.
- High efficient satin PMMA cover.
- Frame made of white painted steel, with steel springs for adjusting the cover to the body of the luminaire.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy at 261/ 272/ 262 editions:
High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K

- High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K
- Luminous Efficacy at 264 edition:
High Efficiency - 189 Lm/Watt 4000K
182 Lm/Watt 3000K
- High Output - 179 Lm/Watt 4000K
172 Lm/Watt 3000K

Code	Description (High Efficiency 250mA)	L
5958403	PSPO 261 LED 14W IP54 Warm	647
5958413	PSPO 261 LED 14W IP54 Neutral	647
5958443	PSPO 261 LED 25W IP54 Warm	1257
5958453	PSPO 261 LED 25W IP54 Neutral	1257
5958483	PSPO 261 LED 31W IP54 Warm	1557
5958493	PSPO 261 LED 31W IP54 Neutral	1557

594403	PSPO 272 LED 25W IP54 Warm	647
594413	PSPO 272 LED 25W IP54 Neutral	647
594443	PSPO 272 LED 49W IP54 Warm	1257
594453	PSPO 272 LED 49W IP54 Neutral	1257
594483	PSPO 272 LED 60W IP54 Warm	1557
594493	PSPO 272 LED 60W IP54 Neutral	1557

5958603	PSPO 262 LED 25W IP54 Warm	647
5958613	PSPO 262 LED 25W IP54 Neutral	647
5958643	PSPO 262 LED 49W IP54 Warm	1257
5958653	PSPO 262 LED 49W IP54 Neutral	1257
5958683	PSPO 262 LED 60W IP54 Warm	1557
5958693	PSPO 262 LED 60W IP54 Neutral	1557

Code	Description (High Efficiency 350mA)	L
5958723	PSPO 264 LED 33W IP54 Warm	647
5958733	PSPO 264 LED 33W IP54 Neutral	647

Code	Description (High Output 350mA)	L
5958423	PSPO 261 LED 19W IP54 Warm	647
5958433	PSPO 261 LED 19W IP54 Neutral	647
5958463	PSPO 261 LED 36W IP54 Warm	1257
5958473	PSPO 261 LED 36W IP54 Neutral	1257
5958503	PSPO 261 LED 44W IP54 Warm	1557
5958513	PSPO 261 LED 44W IP54 Neutral	1557


594423	PSPO 272 LED 36W IP54 Warm	647
594433	PSPO 272 LED 36W IP54 Neutral	647
594463	PSPO 272 LED 70W IP54 Warm	1257
594473	PSPO 272 LED 70W IP54 Neutral	1257
594503	PSPO 272 LED 86W IP54 Warm	1557
594513	PSPO 272 LED 86W IP54 Neutral	1557

5958623	PSPO 262 LED 36W IP54 Warm	647
5958633	PSPO 262 LED 36W IP54 Neutral	647
5958663	PSPO 262 LED 70W IP54 Warm	1257
5958673	PSPO 262 LED 70W IP54 Neutral	1257
5958703	PSPO 262 LED 86W IP54 Warm	1557
5958713	PSPO 262 LED 86W IP54 Neutral	1557


Code	Description (High Output 575mA)	L
5958743	PSPO 264 LED 55W IP54 Warm	647
5958753	PSPO 264 LED 55W IP54 Neutral	647

For dimmer version add letter "D" at the end of product code.


PSPO 261




PSPO 262



PSPO 264




PSPO 272





PRISMA

PRISMA MICROPRISMATIC LED IP54



- Steel body.
- High efficient microprismatic PMMA cover.
- Frame made of white painted steel, with steel springs for adjusting the cover to the body of the luminaire.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy at 261/ 272/ 262 editions:
High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K

- High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K
- Luminous Efficacy at 264 edition:
High Efficiency - 189 Lm/Watt 4000K
182 Lm/Watt 3000K
- High Output - 179 Lm/Watt 4000K
172 Lm/Watt 3000K



261/272/262:
14W/19W/25W/36W= 647mm
25W/36W/49W/70W=1257mm
31W/44W/60W/86W=1557mm
264:
49W/70W= 647mm

Code	Description (High Efficiency 250mA)	L
5928403	MICROPRISMATIC 261 LED 14W IP54 Warm	647
5928413	MICROPRISMATIC 261 LED 14W IP54 Neutral	647
5928443	MICROPRISMATIC 261 LED 25W IP54 Warm	1257
5928453	MICROPRISMATIC 261 LED 25W IP54 Neutral	1257
5928483	MICROPRISMATIC 261 LED 31W IP54 Warm	1557
5928493	MICROPRISMATIC 261 LED 31W IP54 Neutral	1557

591403	MICROPRISMATIC 272 LED 25W IP54 Warm	647
591413	MICROPRISMATIC 272 LED 25W IP54 Neutral	647
591443	MICROPRISMATIC 272 LED 49W IP54 Warm	1257
591453	MICROPRISMATIC 272 LED 49W IP54 Neutral	1257
591483	MICROPRISMATIC 272 LED 60W IP54 Warm	1557
591493	MICROPRISMATIC 272 LED 60W IP54 Neutral	1557

5928603	MICROPRISMATIC 262 LED 25W IP54 Warm	647
5928613	MICROPRISMATIC 262 LED 25W IP54 Neutral	647
5928643	MICROPRISMATIC 262 LED 49W IP54 Warm	1257
5928653	MICROPRISMATIC 262 LED 49W IP54 Neutral	1257
5928683	MICROPRISMATIC 262 LED 60W IP54 Warm	1557
5928693	MICROPRISMATIC 262 LED 60W IP54 Neutral	1557

Code	Description (High Efficiency 250mA)	L
5928723	MICROPRISMATIC 264 LED 33W IP54 Warm	647
5928733	MICROPRISMATIC 264 LED 33W IP54 Neutral	647

Code	Description (High Output 350mA)	L
5928423	MICROPR. 261 LED 19W IP54 Warm	647
5928433	MICROPR. 261 LED 19W IP54 Neutral	647
5928463	MICROPR. 261 LED 36W IP54 Warm	1257
5928473	MICROPR. 261 LED 36W IP54 Neutral	1257
5928503	MICROPR. 261 LED 44W IP54 Warm	1557
5928513	MICROPR. 261 LED 44W IP54 Neutral	1557


591423	MICROPR. 272 LED 36W IP54 Warm	647
591433	MICROPR. 272 LED 36W IP54 Neutral	647
591463	MICROPR. 272 LED 70W IP54 Warm	1257
591473	MICROPR. 272 LED 70W IP54 Neutral	1257
591503	MICROPR. 272 LED 86W IP54 Warm	1557
591513	MICROPR. 272 LED 86W IP54 Neutral	1557

5928623	MICROPR. 262 LED 36W IP54 Warm	647
5928633	MICROPR. 262 LED 36W IP54 Neutral	647
5928663	MICROPR. 262 LED 70W IP54 Warm	1257
5928673	MICROPR. 262 LED 70W IP54 Neutral	1257
5928703	MICROPR. 262 LED 86W IP54 Warm	1557
5928713	MICROPR. 262 LED 86W IP54 Neutral	1557


Code	Description (High Output 575mA)	L
5928743	MICROPR. 264 LED 55W IP54 Warm	647
5928753	MICROPR. 264 LED 55W IP54 Neutral	647

For dimmer version add letter "D" at the end of product code.


MICROPRISMATIC 261




MICROPRISMATIC 262



MICROPRISMATIC 264




MICROPRISMATIC 272




PRISMA

DOUBLE ADJUSTABLE SUSPENSION (only for 261 Series)



SINGLE ADJUSTABLE SUSPENSION



POWER SUPPLY



POWER SUPPLY



PROFESSIONAL SURFACE & PENDANT LUMINAIRES



- Stainless steel cable and regulators.
- **Required:**
2 pieces per luminaire.

Code	Description	L	Kg
900142	Double Suspension	1000	0,070
900143	Double Suspension	1500	0,110
900144	Double Suspension	2000	0,220



- Stainless steel cable and regulators.
- **Required:**
4 pieces per luminaire.

Code	Description	L	Kg
900111	Single Suspension	500	0,050
900112	Single Suspension	1000	0,100
900113	Single Suspension	1500	0,150
900114	Single Suspension	2000	0,200
900116	Single Suspension	3000	0,300



- Plastic body.
- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.

Code	Description	L	Kg
900122	Power Supply 3x0,75mm ² with Rosette Ø75	1000	0,120
900124	Power Supply 3x0,75mm ² with Rosette Ø75	2000	0,240
900126	Power Supply 3x0,75mm ² with Rosette Ø75	3000	0,360
900127	Power Supply 3x0,75mm ² with Rosette Ø75	4000	0,500
900162	Power Supply 5x0,50mm ² with Rosette Ø75	1000	0,120
900164	Power Supply 5x0,50mm ² with Rosette Ø75	2000	0,240
900166	Power Supply 5x0,50mm ² with Rosette Ø75	3000	0,360
900167	Power Supply 5x0,50mm ² with Rosette Ø75	4000	0,500



- For pendant use.
- Rosette from aluminium profile with 2m transparent cable 3x0,75mm² or 5x0,50mm² for dimmer or emergency versions in square or round version.

Code	Description	Kg
90042	Power Supply 3x0,75mm ² L 2m Ø80	0,130
90043	Power Supply 3x0,75mm ² L 2m Ø70	0,130
90044	Power Supply 3x0,75mm ² L 2m 80x80	0,210
90045	Power Supply 3x0,75mm ² L 2m 70x70	0,200
90048	Power Supply 5x0,50mm ² L 2m Ø100	0,250
90049	Power Supply 5x0,50mm ² L 2m 100x100	0,300

PRISMA

PROFESSIONAL SURFACE & PENDANT LUMINAIRES



