

*A luminaire with a contemporary design.*

*KALIA is a piece of architecture, perfect for adding stature to an area.*

*With it's gentle lighting, it upgrades areas such as lobbies, corridors, offices, stores and homes.*

#### **Technical Features**


- Aluminium body, painted electrostatically in selected colour.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V/50Hz.

#### **Upon Request**

- At special shapes and dimensions.

# KALIA

## KALIA 1

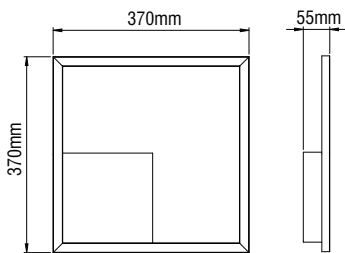

CE

F

IP 40

LED

850°C

5 YEARS WARRANTY



ta  
25°C

Included

- Aluminium body, painted electrostatically in selected colour.
- Driver 24V DC included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:  
140Lm/W at 4000 K  
133Lm/W at 3000 K

Code	Description
8200540	Kalia 1 21W 24V DC
8200544	Kalia 1 21W 24V DC (phase cut)
8200532	Kalia 1 21W 24V DC (dali / push button)

## KALIA 2

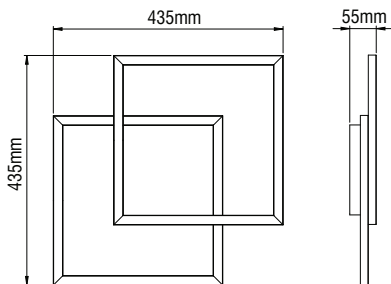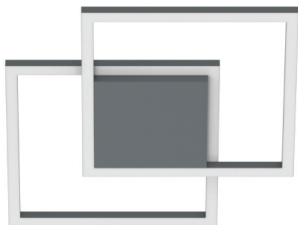

CE

F

IP 40

LED

850°C

5 YEARS WARRANTY

ta  
25°C

Included

- Aluminium body, painted electrostatically in selected colour.
- Driver 24V DC included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:  
140Lm/W at 4000 K  
133Lm/W at 3000 K

Code	Description
8200541	Kalia 2 36W 24V DC
8200545	Kalia 2 36W 24V DC (phase cut)
8200533	Kalia 2 36W 24V DC (dali / push button)

LED COLOUR CODES:

2

 Warm 

3

 Neutral

Colour Codes:

0

 Colours 

1

 White 

2


 Titan 

3

 Black

# KALIA

## KALIA 3

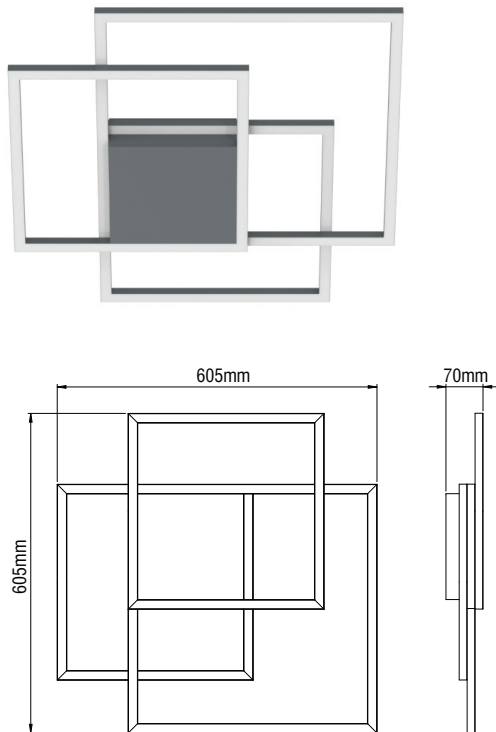


CE	F	⊕	IP 40	LED	850°C	5 YEARS WARRANTY
ta 25°C	Included					

- Aluminium body, painted electrostatically in selected colour.
- Driver 24V DC included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:  
140Lm/W at 4000 K  
133Lm/W at 3000 K

Code	Description
8200542	Kalia 3 69W 24V DC
8200546	Kalia 3 69W 24V DC (phase cut)
8200547	Kalia 3 69W 24V DC (dali / push button)

## KALIA 4

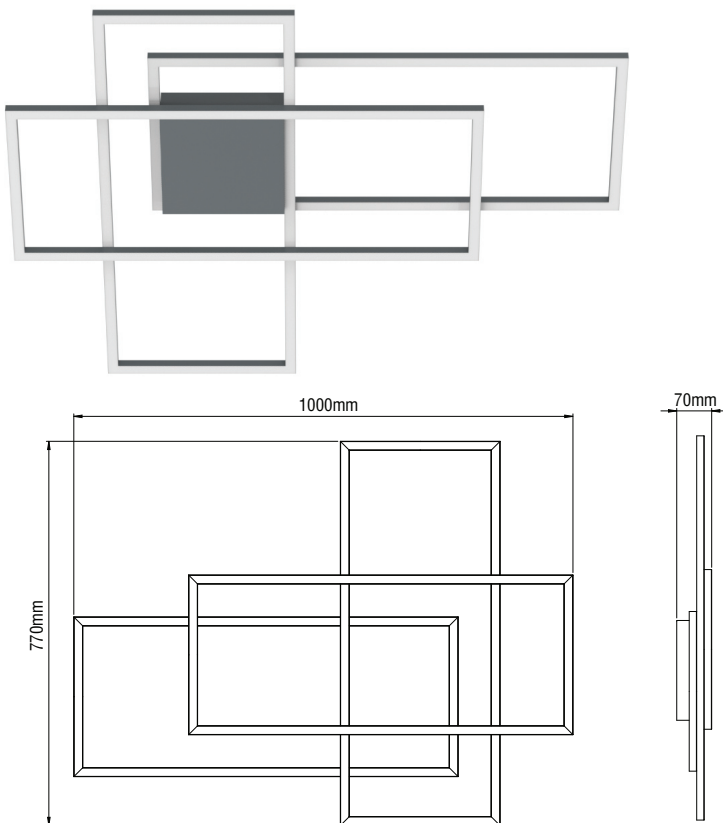

CE	F	⊕	IP 40	LED	850°C	5 YEARS WARRANTY
ta 25°C	Included					

- Aluminium body, painted electrostatically in selected colour.
- Driver 24V DC included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:  
140Lm/W at 4000 K  
133Lm/W at 3000 K

Code	Description
8200543	Kalia 4 95W 24V DC
8200548	Kalia 4 95W 24V DC (phase cut)
8200549	Kalia 4 95W 24V DC (dali / push button)

<b>LED COLOUR CODES:</b>	<b>Colour Codes:</b>
<b>2</b> Warm <b>3</b> Neutral	<b>0</b> Colours <b>1</b> White <b>2</b> Titan <b>3</b> Black