



EASYLINE IKAROS 3R is a cutting-edge continuous three row LED system that combines efficiency with a compact uninterrupted design.

The variety of available optics make it versatile and suitable for premises where diffuse lighting or vertical-surfaces illumination is requested (super markets, retail shops, storage corridors etc).

Technical Features

- Continuous led line system.
- Trunking from aluminium profile, painted electrostatically in selected colour.
- Gear tray from aluminium profile.
- Driver included.
- Led modules in high efficient or high output operation.
- High efficient PMMA optics in three different versions.
- Pre-wired gear trays for easy and fast installation.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V-50/60Hz.



Upon request

- Connection for operation with electronic dimmable ballast and emergency function.

EASYLINE IKAROS 3R

CONTINUOUS LUMINAIRES


TRUNKING

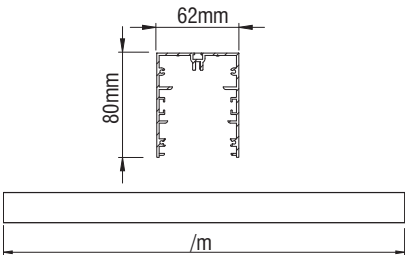







- Body from extruded aluminium profile.
- Plastic end cap without screws.

Code	Description	Kg
993101	Easyline Trunking Surface (meter)	1,700

GEAR TRAY



- Aluminium body.
- High efficient optics in PMMA.
- 6 Types of available optics: Narrow / 30°, Wide / 60°, Wide / 90°, Extra Wide / 110°, double asymmetric / 2AS, asymmetric / WW.
- Luminous Efficacy:
 - High efficiency: 165 Lumen / Watt 4000k
157 Lumen / Watt 3000k
 - High output: 150 Lumen / Watt 4000k
143 Lumen / Watt 3000k
 - Extra high output: 138 Lumen / Watt 4000k
132 Lumen / Watt 3000k



High Efficiency Gear Tray

Code	Description
994 1	Easyline Ikaros 3R Led Gear Tray L 580 14W
994 2	Easyline Ikaros 3R Led Gear Tray L 1150 26W
994 3	Easyline Ikaros 3R Led Gear Tray L 1720 39W

High Output Gear Tray

994 4	Easyline Ikaros 3R Led Gear Tray L 580 25W
994 5	Easyline Ikaros 3R Led Gear Tray L 1150 48W
994 6	Easyline Ikaros 3R Led Gear Tray L 1720 70W

Extra High Output Gear Tray

994 7	Easyline Ikaros 3R Led Gear Tray L 580 36W
994 8	Easyline Ikaros 3R Led Gear Tray L 1150 71W
994 9	Easyline Ikaros 3R Led Gear Tray L 1720 105W

Type:
4 Electronic 5 Dimmer


Led Colour Codes:
2 Warm 3 Neutral

Beam Codes:
1 narrow 30° 2 wide 60° 3 wide 90° 4 extra wide 110° 5 2AS 6 ASYM

EASYLINE IKAROS 3R

CONTINUOUS LUMINAIRES



END CAP



- Plastic end cap.

Code	Description	Kg
99613	Plastic End Cap pair	0,050




TRUNKING METAL COVER



- Aluminium profile.
- Blind metal cover.

Code	Description	Kg
995401	Easyline Cover Aluminium Blind	0,500


TRUNKING ANGLE 90°



- Aluminium profile.
- Blind metal cover included.

Code	Description
996211	Easyline corner profile surface metal blind


TRUNKING CONNECTORS



- Aluminium profile.
- Blind metal cover included.

Code	Description
968255	Trunking Metal Connectors pair

CABLE CONNECTIONS






- PTFE cable connenctions.
- 3pole for standard version and 5pole for dimmer.

Code	Description	L	Kg
996510	Cable connections 3x0,75mm ² /m		0,200
996511	Cable connections 3x0,75mm ²	1500	0,280
996512	Cable connections 3x0,75mm ²	2500	0,380
996520	Cable connections 5x0,75mm ² /m		0,230
996521	Cable connections 5x0,75mm ²	1500	0,300
996522	Cable connections 5x0,75mm ²	2500	0,440

EASYLINE IKAROS 3R



TRUNKING +3Phase Track



- Aluminium profile.
- 3phase track included.

Code	Description	L	Kg
99641050	Ikaros Trunking+3P Track Special/m	500	1,600
99641100	Ikaros Trunking+3P Track Special/m	1000	3,000
99641150	Ikaros Trunking+3P Track Special/m	1500	4,600
99641200	Ikaros Trunking+3P Track Special/m	2000	6,000
99641300	Ikaros Trunking+3P Track Special/m	3000	9,000




LED SPOT ADJUSTABLE

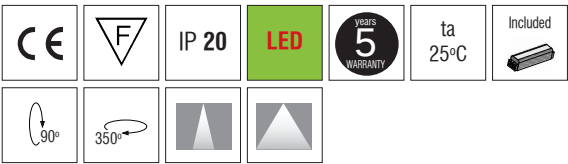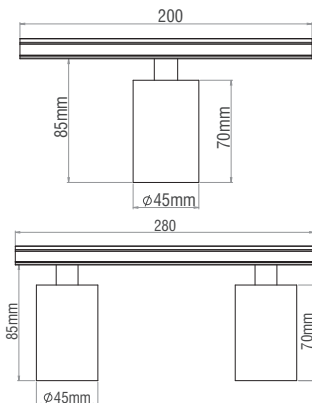

- Aluminium body.
- Reflector or Lens in Medium & Wide version.
- 7W power consumption driven at 350mA.
- Luminous Efficacy: 7W: 4000 K: 117 Lm/W, CRI: min. 80
7W: 3000 K: 112 Lm/W, CRI: min. 80

Code	Description	Kg
99631	Led Spot 7W Adjustable Reflector	0,400
99632	Led Spot 2x7W Adjustable Reflector	0,700
99633	Led Spot 7W Adjustable Lens	0,400
99634	Led Spot 2x7W Adjustable Lens	0,700

LED SPOT FIXED

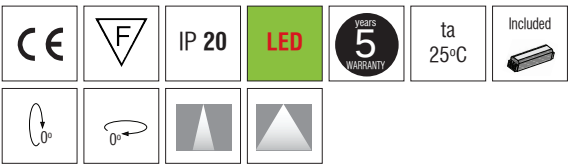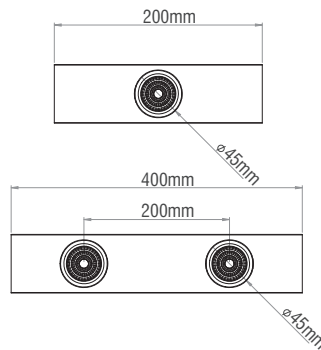


- Aluminium body.
- Reflector or Lens in Medium & Wide version.
- 7W power consumption driven at 350mA.
- Luminous Efficacy: 7W: 4000 K: 117 Lm/W, CRI: min. 80
7W: 3000 K: 112 Lm/W, CRI: min. 80

Code	Description	Kg
99635	Led Spot 7W Fixed Reflector	0,400
99636	Led Spot 2x7W Fixed Reflector	0,700
99637	Led Spot 7W Fixed Lens	0,400
99638	Led Spot 2x7W Fixed Lens	0,700

EASYLINE IKAROS 3R

SINGLE ADJUSTABLE SUSPENSION



- Stainless steel cable and regulators.
- **Required:**
2 pieces for up to 3m profile.

Code	Description	L	Kg
900112	Single Suspension	1000	0,100
900114	Single Suspension	2000	0,200
900116	Single Suspension	3000	0,300

POWER SUPPLY



- For pendant use.
- Rosette from aluminium profile with 2m transparent cable
3x0,75mm² or 5x0,50mm² for dimmer or emergency
versions in square or round version.

Code	Description	Kg
90042	Power Supply 3x0,75mm ² L 2m with Rosette Ø80	0,130
90043	Power Supply 3x0,75mm ² L 2m with Rosette Ø70	0,130
90044	Power Supply 3x0,75mm ² L 2m with Rosette 80x80	0,210
90045	Power Supply 3x0,75mm ² L 2m with Rosette 70x70	0,200
90053	Power Supply 5x0,50mm ² L 2m with Rosette Ø100	0,250
90055	Power Supply 5x0,50mm ² L 2m with Rosette 100x100	0,250

Colour Codes:

0 Colours **1** White **2** Titan **3** Black

