



EASYLINE IKAROS 3R Recessed is a cutting-edge continuous three row LED system that combines efficiency with an uninterrupted design.

The variety of available optics make it versatile and suitable for premises where diffuse lighting or vertical-surfaces illumination is requested (super markets, retail shops, storage corridors etc).

Technical Features

- Continuous led line system.
- Trunking from aluminium profile, painted electrostatically in selected colour.
- Gear tray from aluminium profile.
- Driver included.
- Led modules in high efficient or high output operation.
- High efficient PMMA optics in three different versions.
- Pre-wired gear trays for easy and fast installation.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V-50/60Hz.



Upon request

- Connection for operation with electronic dimmable ballast and emergency function.

EASYLINE IKAROS 3R RECESSED

CONTINUOUS LUMINAIRES


TRUNKING

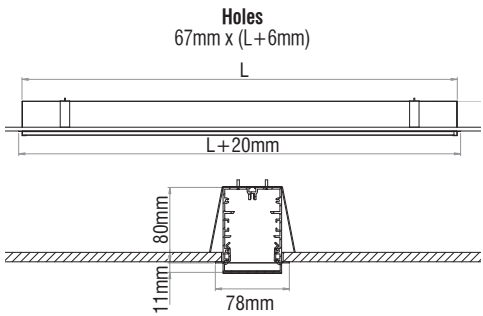



- Body from extruded aluminium profile.
- Aluminium end cap.

Code	Description	Kg
9932	Easyline Trunking Recessed	1,800

GEAR TRAY



- Aluminium body.
- High efficient optics in PMMA.
- 6 Types of available optics: Narrow / 30°, Wide / 60°, Wide / 90°, Extra Wide / 110°, double asymmetric / 2AS, asymmetric / WW.
- Luminous Efficacy:
 - High efficiency: 165 Lumen / Watt 4000k
157 Lumen / Watt 3000k
 - High output: 150 Lumen / Watt 4000k
143 Lumen / Watt 3000k
 - Extra high output: 138 Lumen / Watt 4000k
132 Lumen / Watt 3000k



High Efficiency Gear Tray





Code	Description
994	Easyline Ikaros 3R Led Gear Tray L 580 14W
994	Easyline Ikaros 3R Led Gear Tray L 1150 26W
994	Easyline Ikaros 3R Led Gear Tray L 1720 39W

High Output Gear Tray

994	Easyline Ikaros 3R Led Gear Tray L 580 25W
994	Easyline Ikaros 3R Led Gear Tray L 1150 48W
994	Easyline Ikaros 3R Led Gear Tray L 1720 70W

Extra High Output Gear Tray

994	Easyline Ikaros 3R Led Gear Tray L 580 36W
994	Easyline Ikaros 3R Led Gear Tray L 1150 71W
994	Easyline Ikaros 3R Led Gear Tray L 1720 105W



Type:	Led Colour Codes:
4 Electronic 5 Dimmer	2 Warm 3 Neutral

Beam Codes:
1 narrow 30° 2 wide 60° 3 wide 90° 4 extra wide 110° 5 2AS 6 ASYM

Colour Codes:
0 Colours 1 White 2 Titan 3 Black 9 Anodized

EASYLINE IKAROS 3R RECESSED

CONTINUOUS LUMINAIRES



END CAP



- Aluminium end cap.

Code	Description	Kg
99614	Aluminium End Cap pair	0,050




TRUNKING METAL COVER



- Aluminium profile.
- Blind metal cover.

Code	Description	Kg
9954	Easyline Cover Aluminium Blind	0,500


TRUNKING ANGLE 90°



- Aluminium profile.
- Blind metal cover included.

Code	Description
996221	Easyline corner profile recessed metal blind

TRUNKING CONNECTORS



- Aluminium profile.
- Blind metal cover included.

Code	Description
968255	Trunking Metal Connectors pair

CABLE CONNECTIONS





- PTFE cable connenctions.
- 3pole for standard version and 5pole for dimmer.

Code	Description	L	Kg
996510	Cable connections 3x1,5mm ² /m		0,200
996511	Cable connections 3x1,5mm ²	1500	0,280
996512	Cable connections 3x1,5mm ²	2500	0,380
996520	Cable connections 5x1,5mm ² /m		0,230
996521	Cable connections 5x1,5mm ²	1500	0,300
996522	Cable connections 5x1,5mm ²	2500	0,440

EASYLINE IKAROS 3R RECESSED

CONTINUOUS LUMINAIRES


TRUNKING +3Phase Track

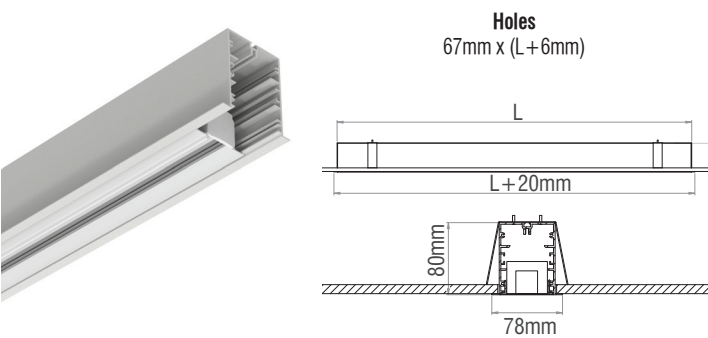

- Aluminium profile.
- 3phase track included.

Code	Description	L	Kg
99642050	Ikaros Trunking+3P Track Special/m	500	1,600
99642100	Ikaros Trunking+3P Track Special/m	1000	3,000
99642150	Ikaros Trunking+3P Track Special/m	1500	4,600
99642200	Ikaros Trunking+3P Track Special/m	2000	6,000
99642300	Ikaros Trunking+3P Track Special/m	3000	9,000



LED SPOT ADJUSTABLE

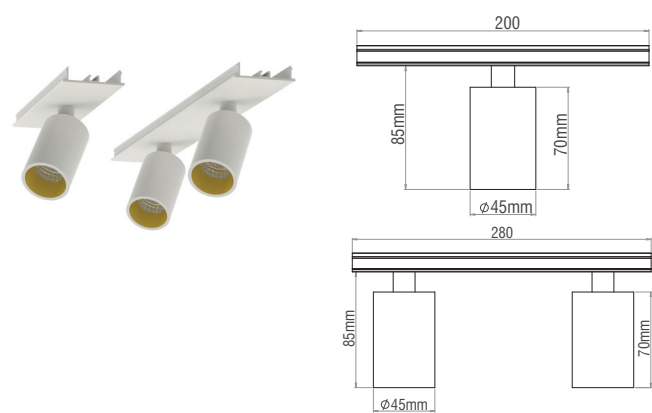

- Aluminium body.
- Reflector or Lens in Medium & Wide version.
- 8W power consumption driven at 350mA.
- Luminous Efficacy: 8W: 4000 K: 820 Lumen, CRI: min. 80
8W: 3000 K: 785 Lumen, CRI: min. 80

Code	Description	Kg
99631	Led Spot 7W Adjustable Reflector	0,400
99632	Led Spot 2x7W Adjustable Reflector	0,700
99633	Led Spot 7W Adjustable Lens	0,400
99634	Led Spot 2x7W Adjustable Lens	0,700


LED SPOT FIXED

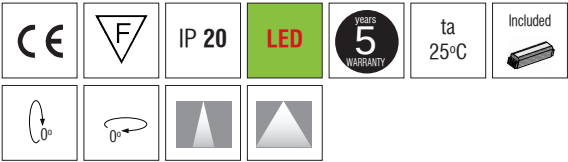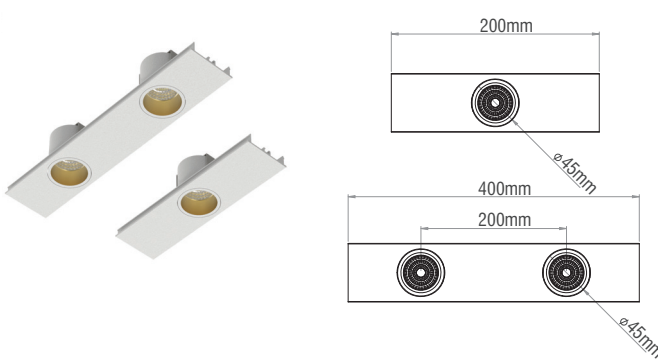

- Aluminium body.
- Reflector or Lens in Medium & Wide version.
- 7W power consumption driven at 350mA.
- Luminous Efficacy: 7W: 4000 K: 820 Lumen, CRI: min. 80
7W: 3000 K: 785 Lumen, CRI: min. 80

Code	Description	Kg
99635	Led Spot 7W Fixed Reflector	0,400
99636	Led Spot 2x7W Fixed Reflector	0,700
99637	Led Spot 7W Fixed Lens	0,400
99638	Led Spot 2x7W Fixed Lens	0,700

EASYLINE BRACKET



- Metal suspension bracket.
- Required 1pc per 1m profile length.

Code	Description	Kg
900211	Suspension Bracket Easyline	0,100