



TEO MINI is a recessed round adjustable spot with elegant design. It can satisfy multiple lighting requirements thanks to its wide variety of editions and it highlights impressively premises, such as shopping malls, stores, hotels, exhibition halls, museums etc. Last generation light sources, ensure excellent performance with maximum energy efficiency. This, in combination with an efficient thermal management, makes a warranty for premium lighting with LED technology.

Technical Features


- Body from die-cast aluminium, painted electrostatically in selected colour or plated.
- Adjustable die-cast aluminium ring, painted electrostatically in selected colour or plated.
- High pure aluminium reflectors in Spot, Medium, Wide versions.
- Easy mounting with clips.
- Pure light without IR/UV radiation.
- Aluminum heatsink anodized.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation with Constant Current.

Upon request:


Available with highest colour rendering index (CRI)

TEO MINI


TEO MINI - LED REFLECTOR




SPOT




MEDIUM




WIDE




TEO MINI - LED REFLECTOR HO




SPOT



MEDIUM



WIDE



Recessed Spotlights & Downlights

CE	F	ELC	IP 20	LED	850°C	5 years WARRANTY	ta 25°C
not Included	60°	0°					10-40mm

- Reflectors: Spot, Medium, Wide.
- 12W power consumption driven at 350mA.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
 - 12W: 4000 K: 174 Lm/Watt
 - 12W: 3000 K: 167 Lm/Watt

Code	Description	Kg
86357	TEO MINI LED REFLECTOR	0,350

CE	F	ELC	IP 20	LED	850°C	5 years WARRANTY	ta 25°C
not Included	60°	0°					10-40mm



- Reflectors: Spot, Medium, Wide.
- 12W power consumption driven at 350mA.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
 - 12W: 4000 K: 174 Lm/Watt
 - 12W: 3000 K: 167 Lm/Watt

Code	Description	Kg
86357	TEO MINI LED REFLECTOR HO	0,350

TEO MINI

Recessed Spotlights & Downlights


TEO MINI - LED SUN

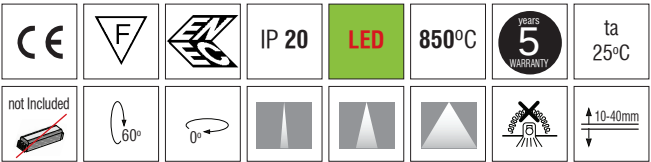


- Reflectors: Spot, Medium, Wide.
- 12W power consumption driven at 350mA.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
12W: 4000 K: 174 Lm/Watt
12W: 3000 K: 167 Lm/Watt

Code	Description	Kg
86356	TEO MINI LED SUN	0,350


SPOT





MEDIUM



WIDE



TEO MINI - CLUB 60

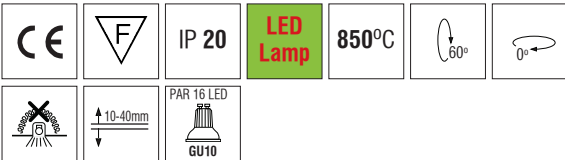

- Version for PAR16/GU10.
- Connection for operation at 230V/50Hz.

Code	Description	Kg
86899	TEO MINI - CLUB 60 GU10	0,350

		DRIVERS		DRIVERS DIMMER	
		350mA 15W	350mA 25W	350mA 18W	350mA 25W
		158x22x19	125x79x22	146,5x43,5x30	124x79x22
				Dali/Push B.	1-10/Push B./Dalli
CODES	MODULES	800021	800041	800038	800042*
86357	TEO MINI LED REFLECTOR	1 module	1 - 2 modules	1 module	1 - 2 modules
86357	TEO MINI LED REFLECTOR HO	1 module	1 - 2 modules	1 module	1 - 2 modules
86356	TEO MINI LED SUN	1 module	1 - 2 modules	1 module	1 - 2 modules

Please order modules and drivers separately

* Please order **synchronization cable** for each dimmer driver separately - Code: 800044 (4m)

LED COLOUR CODES:		BEAM CODES:					
2	Warm	3	Neutral	00	diffuser	01	spot
				02	medium	03	wide
				04	spot HO	05	medium HO
				06	wide HO		
Colour Codes:		0	Colours	1	White	2	Titan
		3	Black	4	Chrome	5	matt Alum.

