

SOFT LIGHT L630

PROFESSIONAL RECESSED LUMINAIRES



This professional recessed luminaire meets the increasingly exacting requirements placed on workplace lighting. It combines perfect direct/indirect light distribution with modern styling and high light output ratios.

Technical Features

- Recessed luminaire for panels in mineral fibre with expose structure or plasterboard ceiling 1200x300mm.
- Steel body painted electrostatically.
- Micro-perforated reflector from steel, painted in white colour covered with reflection film.
- Steel parabolic recuperator with high reflectivity in white colour.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V-50/60Hz.

Upon Request

- Connection for emergency lighting system, for one or three hours.

SOFT LIGHT L630



PROFESSIONAL RECESSED LUMINAIRES



- Micro-perforated reflector from steel, painted in white colour covered with reflection film for LED edition.
- Steel parabolic recuperator with high reflectivity in white colour.
- Suspension brackets not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA


Code	Description
353603	Soft Light LED L 630x68W Warm
353613	Soft Light LED L 630x68W Neutral

For dimmer version add letter “D” at the end of product code.

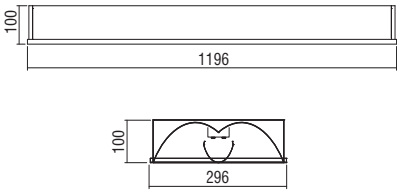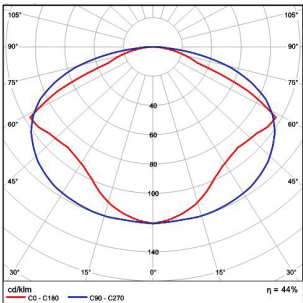

Plasterboard Hole
275x1175mm

SUSPENSION BRACKETS

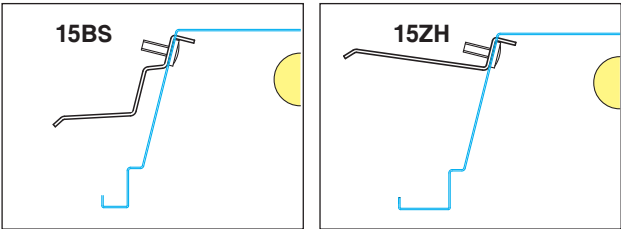

- Suspension brackets from galvanized steel thickness 1,5mm, necessary for the installation in plasterboard.
- **15 BS** min.18mm, max. 45mm
- **15 ZH** min.45mm, max. 72mm

Code	Description
303001	15 BS (4 pieces)
303005	15 ZH (4 pieces)