




## Technical Features

- Body and cover in die cast aluminium.
- Coated in silver - coloured polyester powders (RAL 9006).
- Bracket made of galvanized steel painted in silver colour (RAL 9006).
- Gaskets in anti-aging rubber.
- Extra - clear tempered glass, 4mm thick.
- External screws in stainless steel.

## Upon Request


- Connection for operation on 230V-50/60Hz with dimmer dali or 1-10VDC ballast.



To ensure the degree of protection (sealing), the use of flexible power supply cable type H07RN-F (in appropriate diameter) is required.

# MACH 2 LED EASY




# LUMINAIRES WITH EXTRA PROTECTION

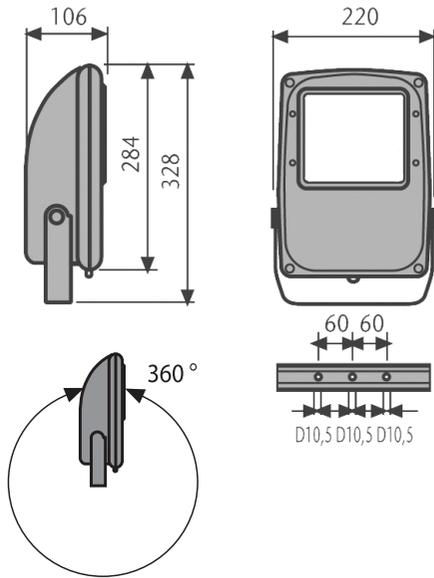

- Beams: Spot, Medium, Wide.
- Aluminium body.
- Tempered protection glass.
- Luminous Efficacy:  
 40W: 5000 K: 141 Lm/W, CRI: min. 80  
 40W: 4000 K: 141 Lm/W, CRI: min. 80  
 40W: 3000 K: 135 Lm/W, CRI: min. 80

| Code  | Description                      |
|-------|----------------------------------|
| 71651 | MACH 2 LED Easy 1Led Symmetrical |

For dimmer version add letter "D" at the end of product code.



**LED COLOUR CODES:**

|        |        |           |
|--------|--------|-----------|
| 1 Cold | 2 Warm | 3 Neutral |
|--------|--------|-----------|

**BEAM CODES:**

|         |           |         |
|---------|-----------|---------|
| 01 spot | 02 medium | 03 wide |
|---------|-----------|---------|

**Colour Codes:**

|         |         |         |
|---------|---------|---------|
| 1 White | 2 Titan | 3 Black |
|---------|---------|---------|