




Technical Features

- Body and cover in die cast aluminium.
- Coated in silver - coloured polyester powders (RAL 9006).
- Bracket made of galvanized steel painted in silver colour (RAL 9006).
- Gaskets in anti-aging rubber.
- Extra - clear tempered glass, 4mm thick.
- External screws in stainless steel.

Upon Request


- Connection for operation on 230V-50/60Hz with dimmer dali or 1-10VDC ballast.



To ensure the degree of protection (sealing), the use of flexible power supply cable type H07RN-F (in appropriate diameter) is required.

MACH 3 LED EASY

LUMINAIRES WITH EXTRA PROTECTION

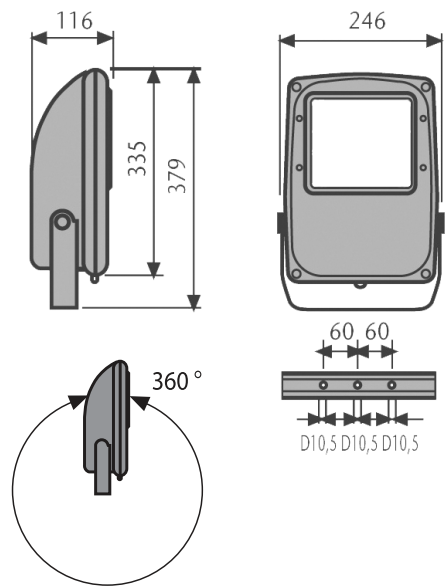

CE

F

IP 67

850°C

LED


ta 25°C

Included

- Beams: Spot, Medium, Wide.
- Aluminium body.
- Tempered protection glass.
- Luminous Efficacy:
54W: 5000 K: 148 Lm/W, CRI: min. 80
54W: 4000 K: 148 Lm/W, CRI: min. 80
54W: 3000 K: 143 Lm/W, CRI: min. 80

Code	Description
71661	MACH 3 LED Easy 2Led Symmetrical

For dimmer version add letter “D” at the end of product code.

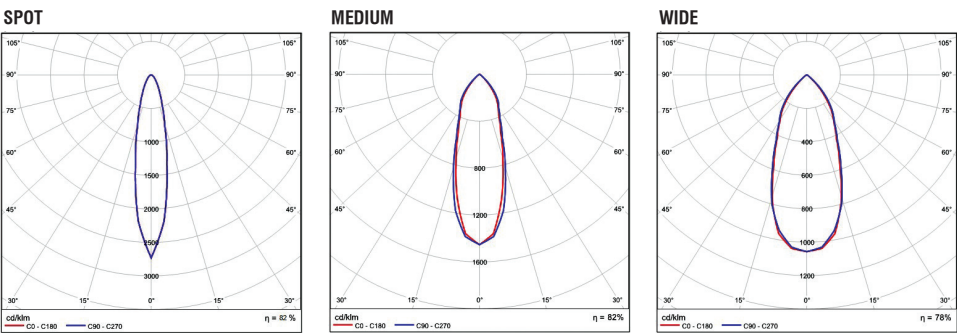

LED COLOUR CODES:

1 Cold

2 Warm

3 Neutral

BEAM CODES:

01 spot

02 medium

03 wide

Colour Codes:

1 White

2 Titan

3 Black