

**Technical Features**

- Steel body, electrostatically painted in white colour.
- High efficient opal PMMA for PSPO Led, microprismatic and aluminium louvre with high efficient satin PMMA cover for louvre version.
- Last generation high efficient LED CHIP.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- UGR<19 at specific editions:
Glare Evaluation: X=4H/ Y=8H S=0,25H, reflection factors 70/50/20.
For DSE work stations: $\gamma \geq 65^\circ$ <3000cd/m².
- Connection for operation on 230V/50-60Hz.

Upon request:

- Body and accessories in various colours (RAL)
- Connection for emergency lighting system, for one or three hours.

P200

P200 2M LED



- Steel body.
- Screen 2M with high efficient satin PMMA cover for led source.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/W 4000K
195 LM/W 3000K
High Output - 201 Lm/W 4000K
189 LM/W 3000K

Code	Description (High Efficiency 250mA)	L
2719403	P2M 221 LED 14W Warm	622
2719413	P2M 221 LED 14W Neutral	622
2719443	P2M 221 LED 25W Warm	1230
2719453	P2M 221 LED 25W Neutral	1230
2719483	P2M 221 LED 31W Warm	1530
2719493	P2M 221 LED 31W Neutral	1530

261803	P2M 242 LED 25W Warm	622
261813	P2M 242 LED 25W Neutral	622
261843	P2M 242 LED 49W Warm	1230
261853	P2M 242 LED 49W Neutral	1230
261883	P2M 242 LED 60W Warm	1530
261893	P2M 242 LED 60W Neutral	1530

2719603	P2M 222 LED 25W Warm	622
2719613	P2M 222 LED 25W Neutral	622
2719643	P2M 222 LED 49W Warm	1230
2719653	P2M 222 LED 49W Neutral	1230
2719683	P2M 222 LED 60W Warm	1530
2719693	P2M 222 LED 60W Neutral	1530





2719723	P2M 224 LED 49W Warm	596
2719733	P2M 224 LED 49W Neutral	596
2719763	P2M 224 LED 98W Warm	1196
2719773	P2M 224 LED 98W Neutral	1196

Code	Description (High Output 350mA)	L
2719423	P2M 221 LED 19W Warm	622
2719433	P2M 221 LED 19W Neutral	622
2719463	P2M 221 LED 36W Warm	1230
2719473	P2M 221 LED 36W Neutral	1230
2719503	P2M 221 LED 44W Warm	1530
2719513	P2M 221 LED 44W Neutral	1530


261823	P2M 242 LED 36W Warm	622
261833	P2M 242 LED 36W Neutral	622
261863	P2M 242 LED 70W Warm	1230
261873	P2M 242 LED 70W Neutral	1230
261903	P2M 242 LED 86W Warm	1530
261913	P2M 242 LED 86W Neutral	1530

2719623	P2M 222 LED 36W Warm	622
2719633	P2M 222 LED 36W Neutral	622
2719663	P2M 222 LED 70W Warm	1230
2719673	P2M 222 LED 70W Neutral	1230
2719703	P2M 222 LED 86W Warm	1530
2719713	P2M 222 LED 86W Neutral	1530


2719743	P2M 224 LED 70W Warm	596
2719753	P2M 224 LED 70W Neutral	596
2719783	P2M 224 LED 140W Warm	1196
2719793	P2M 224 LED 140W Neutral	1196




P2M 221



P2M 222



P2M 242







P200

P200 3M LED



- Steel body.
- Screen 3M with high efficient satin PMMA cover for led source.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/W 4000K
195 LM/W 3000K
High Output - 201 Lm/W 4000K
189 LM/W 3000K



Code	Description (High Efficiency 250mA)	L
2739403	P3M 221 LED 14W Warm	622
2739413	P3M 221 LED 14W Neutral	622
2739443	P3M 221 LED 25W Warm	1230
2739453	P3M 221 LED 25W Neutral	1230
2739483	P3M 221 LED 31W Warm	1530
2739493	P3M 221 LED 31W Neutral	1530

263803	P3M 242 LED 25W Warm	622
263813	P3M 242 LED 25W Neutral	622
263843	P3M 242 LED 49W Warm	1230
263853	P3M 242 LED 49W Neutral	1230
263883	P3M 242 LED 60W Warm	1530
263893	P3M 242 LED 60W Neutral	1530

2739603	P3M 222 LED 25W Warm	622
2739613	P3M 222 LED 25W Neutral	622
2739643	P3M 222 LED 49W Warm	1230
2739653	P3M 222 LED 49W Neutral	1230
2739683	P3M 222 LED 60W Warm	1530
2739693	P3M 222 LED 60W Neutral	1530

2739723	P3M 224 LED 49W Warm	596
2739733	P3M 224 LED 49W Neutral	596
2739763	P3M 224 LED 98W Warm	1196
2739773	P3M 224 LED 98W Neutral	1196

Code	Description (High Output 350mA)	L
2739423	P3M 221 LED 19W Warm	622
2739433	P3M 221 LED 19W Neutral	622
2739463	P3M 221 LED 36W Warm	1230
2739473	P3M 221 LED 36W Neutral	1230
2739503	P3M 221 LED 44W Warm	1530
2739513	P3M 221 LED 44W Neutral	1530


263823	P3M 242 LED 36W Warm	622
263833	P3M 242 LED 36W Neutral	622
263863	P3M 242 LED 70W Warm	1230
263873	P3M 242 LED 70W Neutral	1230
263903	P3M 242 LED 86W Warm	1530
263913	P3M 242 LED 86W Neutral	1530

2739623	P3M 222 LED 36W Warm	622
2739633	P3M 222 LED 36W Neutral	622
2739663	P3M 222 LED 70W Warm	1230
2739673	P3M 222 LED 70W Neutral	1230
2739703	P3M 222 LED 86W Warm	1530
2739713	P3M 222 LED 86W Neutral	1530


2739743	P3M 224 LED 70W Warm	596
2739753	P3M 224 LED 70W Neutral	596
2739783	P3M 224 LED 140W Warm	1196
2739793	P3M 224 LED 140W Neutral	1196

For dimmer version add letter "D" at the end of product code.


P3M 221



P3M 222



P3M 242



P200

P200 SPO LED



- Steel body.
- High efficient satin PMMA cover.
- Frame made of white painted steel, with steel springs for adjusting the cover to the body of the luminaire.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3

- Luminous Efficacy at 221, 222, 242:
High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K
- Luminous Efficacy at 264 edition:
High Efficiency - 189 Lm/Watt 4000K
182 Lm/Watt 3000K
High Output - 179 Lm/Watt 4000K
172 Lm/Watt 3000K

Code	Description (High Efficiency 250mA)	L
2769403	PSPO 221 LED 14W Warm	622
2769413	PSPO 221 LED 14W Neutral	622
2769443	PSPO 221 LED 25W Warm	1230
2769453	PSPO 221 LED 25W Neutral	1230
2769483	PSPO 221 LED 31W Warm	1530
2769493	PSPO 221 LED 31W Neutral	1530

266803	PSPO 242 LED 25W Warm	622
266813	PSPO 242 LED 25W Neutral	622
266843	PSPO 242 LED 49W Warm	1230
266853	PSPO 242 LED 49W Neutral	1230
266883	PSPO 242 LED 60W Warm	1530
266893	PSPO 242 LED 60W Neutral	1530

2769603	PSPO 222 LED 25W Warm	622
2769613	PSPO 222 LED 25W Neutral	622
2769643	PSPO 222 LED 49W Warm	1230
2769653	PSPO 222 LED 49W Neutral	1230
2769683	PSPO 222 LED 60W Warm	1530
2769693	PSPO 222 LED 60W Neutral	1530

Code	Description (High Efficiency 350mA)	L
2769723	PSPO 224 LED 33W Warm	596
2769733	PSPO 224 LED 33W Neutral	596
2769763	PSPO 224 LED 66W Warm	1196
2769773	PSPO 224 LED 66W Neutral	1196

Code	Description (High Output 350mA)	L
2769423	PSPO 221 LED 19W Warm	622
2769433	PSPO 221 LED 19W Neutral	622
2769463	PSPO 221 LED 36W Warm	1230
2769473	PSPO 221 LED 36W Neutral	1230
2769503	PSPO 221 LED 44W Warm	1530
2769513	PSPO 221 LED 44W Neutral	1530


266823	PSPO 242 LED 36W Warm	622
266833	PSPO 242 LED 36W Neutral	622
266863	PSPO 242 LED 70W Warm	1230
266873	PSPO 242 LED 70W Neutral	1230
266903	PSPO 242 LED 86W Warm	1530
266913	PSPO 242 LED 86W Neutral	1530

2769623	PSPO 222 LED 36W Warm	622
2769633	PSPO 222 LED 36W Neutral	622
2769663	PSPO 222 LED 70W Warm	1230
2769673	PSPO 222 LED 70W Neutral	1230
2769703	PSPO 222 LED 86W Warm	1530
2769713	PSPO 222 LED 86W Neutral	1530


Code	Description (High Output 575mA)	L
2769743	PSPO 224 LED 55W Warm	596
2769753	PSPO 224 LED 55W Neutral	596
2769783	PSPO 224 LED 110W Warm	1196
2769793	PSPO 224 LED 110W Neutral	1196

For dimmer version add letter "D" at the end of product code.


PSPO 221




PSPO 222



PSPO 224



PSPO 242



P200





PROFESSIONAL SURFACE & PENDANT LUMINAIRES

P200 MICROPRISMATIC LED



- Steel body.
- High efficient microprismatic PMMA cover.
- Frame made of white painted steel, with steel springs for adjusting the cover to the body of the luminaire.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3

- Luminous Efficacy at 221, 222, 242:
High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K
- Luminous Efficacy at 264 edition:
High Efficiency - 189 Lm/Watt 4000K
182 Lm/Watt 3000K
High Output - 179 Lm/Watt 4000K
172 Lm/Watt 3000K



Code	Description (High Efficiency 250mA)	L
2749403	MICROPRISMATIC 221 LED 14W Warm	622
2749413	MICROPRISMATIC 221 LED 14W Neutral	622
2749443	MICROPRISMATIC 221 LED 25W Warm	1230
2749453	MICROPRISMATIC 221 LED 25W Neutral	1230
2749483	MICROPRISMATIC 221 LED 31W Warm	1530
2749493	MICROPRISMATIC 221 LED 31W Neutral	1530

264803	MICROPRISMATIC 242 LED 25W Warm	622
264813	MICROPRISMATIC 242 LED 25W Neutral	622
264843	MICROPRISMATIC 242 LED 49W Warm	1230
264853	MICROPRISMATIC 242 LED 49W Neutral	1230
264883	MICROPRISMATIC 242 LED 60W Warm	1530
264893	MICROPRISMATIC 242 LED 60W Neutral	1530

2749603	MICROPRISMATIC 222 LED 25W Warm	622
2749613	MICROPRISMATIC 222 LED 25W Neutral	622
2749643	MICROPRISMATIC 222 LED 49W Warm	1230
2749653	MICROPRISMATIC 222 LED 49W Neutral	1230
2749683	MICROPRISMATIC 222 LED 60W Warm	1530
2749693	MICROPRISMATIC 222 LED 60W Neutral	1530

Code	Description (High Efficiency 350mA)	L
2749723	MICROPRISMATIC 224 LED 33W Warm	596
2749733	MICROPRISMATIC 224 LED 33W Neutral	596
2749763	MICROPRISMATIC 224 LED 66W Warm	1196
2749773	MICROPRISMATIC 224 LED 66W Neutral	1196

Code	Description (High Output 350mA)	L
2749423	MICROPRISMATIC 221 LED 19W Warm	622
2749433	MICROPRISMATIC 221 LED 19W Neutral	622
2749463	MICROPRISMATIC 221 LED 36W Warm	1230
2749473	MICROPRISMATIC 221 LED 36W Neutral	1230
2749503	MICROPRISMATIC 221 LED 44W Warm	1530
2749513	MICROPRISMATIC 221 LED 44W Neutral	1530


264823	MICROPRISMATIC 242 LED 36W Warm	622
264833	MICROPRISMATIC 242 LED 36W Neutral	622
264863	MICROPRISMATIC 242 LED 70W Warm	1230
264873	MICROPRISMATIC 242 LED 70W Neutral	1230
264903	MICROPRISMATIC 242 LED 86W Warm	1530
264913	MICROPRISMATIC 242 LED 86W Neutral	1530

2749623	MICROPRISMATIC 222 LED 36W Warm	622
2749633	MICROPRISMATIC 222 LED 36W Neutral	622
2749663	MICROPRISMATIC 222 LED 70W Warm	1230
2749673	MICROPRISMATIC 222 LED 70W Neutral	1230
2749703	MICROPRISMATIC 222 LED 86W Warm	1530
2749713	MICROPRISMATIC 222 LED 86W Neutral	1530


Code	Description (High Output 575mA)	L
2749743	MICROPRISMATIC 224 LED 55W Warm	596
2749753	MICROPRISMATIC 224 LED 55W Neutral	596
2749783	MICROPRISMATIC 224 LED 110W Warm	1196
2749793	MICROPRISMATIC 224 LED 110W Neutral	1196

For dimmer version add letter "D" at the end of product code.


MICROPRISMATIC 221




MICROPRISMATIC 222



MICROPRISMATIC 224



MICROPRISMATIC 242



P200





PROFESSIONAL SURFACE & PENDANT LUMINAIRES

P200 SPO LED IP54



- Steel body.
- High efficient satin PMMA cover.
- Frame made of white painted steel, with steel springs for adjusting the cover to the body of the luminaire.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3

- Luminous Efficacy at 221, 222, 242:
High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K
- Luminous Efficacy at 264 edition:
High Efficiency - 189 Lm/Watt 4000K
182 Lm/Watt 3000K
High Output - 179 Lm/Watt 4000K
172 Lm/Watt 3000K

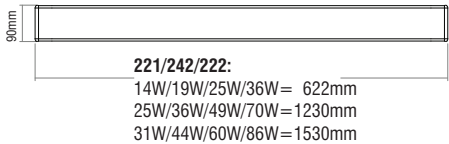

Code	Description (High Efficiency 250mA)	L
5968403	PSP0 221 LED 14W IP54 Warm	622
5968413	PSP0 221 LED 14W IP54 Neutral	622
5968443	PSP0 221 LED 25W IP54 Warm	1230
5968453	PSP0 221 LED 25W IP54 Neutral	1230
5968483	PSP0 221 LED 31W IP54 Warm	1530
5968493	PSP0 221 LED 31W IP54 Neutral	1530

590803	PSP0 242 LED 25W IP54 Warm	622
590813	PSP0 242 LED 25W IP54 Neutral	622
590843	PSP0 242 LED 49W IP54 Warm	1230
590853	PSP0 242 LED 49W IP54 Neutral	1230
590883	PSP0 242 LED 60W IP54 Warm	1530
590893	PSP0 242 LED 60W IP54 Neutral	1530

5968603	PSP0 222 LED 25W IP54 Warm	622
5968613	PSP0 222 LED 25W IP54 Neutral	622
5968643	PSP0 222 LED 49W IP54 Warm	1230
5968653	PSP0 222 LED 49W IP54 Neutral	1230
5968683	PSP0 222 LED 60W IP54 Warm	1530
5968693	PSP0 222 LED 60W IP54 Neutral	1530

Code	Description (High Efficiency 350mA)	L
5968723	PSP0 224 LED 33W IP54 Warm	596
5968733	PSP0 224 LED 33W IP54 Neutral	596
5968763	PSP0 224 LED 66W IP54 Warm	1196
5968773	PSP0 224 LED 66W IP54 Neutral	1196

Code	Description (High Output 350mA)	L
5968423	PSP0 221 LED 19W IP54 Warm	622
5968433	PSP0 221 LED 19W IP54 Neutral	622
5968463	PSP0 221 LED 36W IP54 Warm	1230
5968473	PSP0 221 LED 36W IP54 Neutral	1230
5968503	PSP0 221 LED 44W IP54 Warm	1530
5968513	PSP0 221 LED 44W IP54 Neutral	1530


590823	PSP0 242 LED 36W IP54 Warm	622
590833	PSP0 242 LED 36W IP54 Neutral	622
590863	PSP0 242 LED 70W IP54 Warm	1230
590873	PSP0 242 LED 70W IP54 Neutral	1230
590903	PSP0 242 LED 86W IP54 Warm	1530
590913	PSP0 242 LED 86W IP54 Neutral	1530

5968623	PSP0 222 LED 36W IP54 Warm	622
5968633	PSP0 222 LED 36W IP54 Neutral	622
5968663	PSP0 222 LED 70W IP54 Warm	1230
5968673	PSP0 222 LED 70W IP54 Neutral	1230
5968703	PSP0 222 LED 86W IP54 Warm	1530
5968713	PSP0 222 LED 86W IP54 Neutral	1530


Code	Description (High Output 575mA)	L
5968743	PSP0 224 LED 55W IP54 Warm	596
5968753	PSP0 224 LED 55W IP54 Neutral	596
5968783	PSP0 224 LED 110W IP54 Warm	1196
5968793	PSP0 224 LED 110W IP54 Neutral	1196

For dimmer version add letter "D" at the end of product code.


PSP0 221




PSP0 222



PSP0 224



PSP0 242



P200





PROFESSIONAL SURFACE & PENDANT LUMINAIRES

P200 MICROPRISMATIC LED IP54



- Steel body.
- High efficient microprismatic PMMA cover.
- Frame made of white painted steel, with steel springs for adjusting the cover to the body of the luminaire.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3

- Luminous Efficacy at 221, 222, 242:
High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K
- Luminous Efficacy at 264 edition:
High Efficiency - 189 Lm/Watt 4000K
182 Lm/Watt 3000K
High Output - 179 Lm/Watt 4000K
172 Lm/Watt 3000K

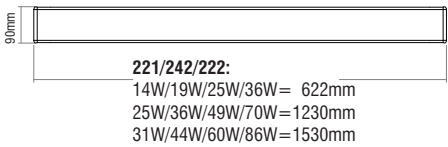

Code	Description (High Efficiency 250mA)	L
5938403	MICROPRISMATIC 221 LED 14W IP54 Warm	622
5938413	MICROPRISMATIC 221 LED 14W IP54 Neutral	622
5938443	MICROPRISMATIC 221 LED 25W IP54 Warm	1230
5938453	MICROPRISMATIC 221 LED 25W IP54 Neutral	1230
5938483	MICROPRISMATIC 221 LED 31W IP54 Warm	1530
5938493	MICROPRISMATIC 221 LED 31W IP54 Neutral	1530

599803	MICROPRISMATIC 242 LED 25W IP54 Warm	622
599813	MICROPRISMATIC 242 LED 25W IP54 Neutral	622
599843	MICROPRISMATIC 242 LED 49W IP54 Warm	1230
599853	MICROPRISMATIC 242 LED 49W IP54 Neutral	1230
599883	MICROPRISMATIC 242 LED 60W IP54 Warm	1530
599893	MICROPRISMATIC 242 LED 60W IP54 Neutral	1530

5938603	MICROPRISMATIC 222 LED 25W IP54 Warm	622
5938613	MICROPRISMATIC 222 LED 25W IP54 Neutral	622
5938643	MICROPRISMATIC 222 LED 49W IP54 Warm	1230
5938653	MICROPRISMATIC 222 LED 49W IP54 Neutral	1230
5938683	MICROPRISMATIC 222 LED 60W IP54 Warm	1530
5938693	MICROPRISMATIC 222 LED 60W IP54 Neutral	1530

Code	Description (High Efficiency 350mA)	L
5938723	MICROPRISMATIC 224 LED 33W IP54 Warm	596
5938733	MICROPRISMATIC 224 LED 33W IP54 Neutral	596
5938763	MICROPRISMATIC 224 LED 66W IP54 Warm	1196
5938773	MICROPRISMATIC 224 LED 66W IP54 Neutral	1196

Code	Description (High Output 350mA)	L
5938423	MICROPR. 221 LED 19W IP54 Warm	622
5938433	MICROPR. 221 LED 19W IP54 Neutral	622
5938463	MICROPR. 221 LED 36W IP54 Warm	1230
5938473	MICROPR. 221 LED 36W IP54 Neutral	1230
5938503	MICROPR. 221 LED 44W IP54 Warm	1530
5938513	MICROPR. 221 LED 44W IP54 Neutral	1530


599823	MICROPR. 242 LED 36W IP54 Warm	622
599833	MICROPR. 242 LED 36W IP54 Neutral	622
599863	MICROPR. 242 LED 70W IP54 Warm	1230
599873	MICROPR. 242 LED 70W IP54 Neutral	1230
599903	MICROPR. 242 LED 86W IP54 Warm	1530
599913	MICROPR. 242 LED 86W IP54 Neutral	1530

5938623	MICROPR. 222 LED 36W IP54 Warm	622
5938633	MICROPR. 222 LED 36W IP54 Neutral	622
5938663	MICROPR. 222 LED 70W IP54 Warm	1230
5938673	MICROPR. 222 LED 70W IP54 Neutral	1230
5938703	MICROPR. 222 LED 86W IP54 Warm	1530
5938713	MICROPR. 222 LED 86W IP54 Neutral	1530


Code	Description (High Output 575mA)	L
5938743	MICROPR. 224 LED 55W IP54 Warm	596
5938753	MICROPR. 224 LED 55W IP54 Neutral	596
5938783	MICROPR. 224 LED 110W IP54 Warm	1196
5938793	MICROPR. 224 LED 110W IP54 Neutral	1196

For dimmer version add letter "D" at the end of product code.


MICROPRISMATIC 221




MICROPRISMATIC 222



MICROPRISMATIC 224




MICROPRISMATIC 242



P200

SINGLE ADJUSTABLE SUSPENSION



POWER SUPPLY



POWER SUPPLY



PROFESSIONAL SURFACE & PENDANT LUMINAIRES



- Stainless steel cable and regulators.

- **Required:**

4 pieces per luminaire.

Code	Description	L	Kg
900111	Single Suspension	500	0,050
900112	Single Suspension	1000	0,100
900113	Single Suspension	1500	0,150
900114	Single Suspension	2000	0,200
900116	Single Suspension	3000	0,300



- Plastic body.

- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.

Code	Description	L	Kg
900122	Power Supply 3x0,75mm ² with Rosette Ø75	1000	0,120
900124	Power Supply 3x0,75mm ² with Rosette Ø75	2000	0,240
900126	Power Supply 3x0,75mm ² with Rosette Ø75	3000	0,360
900127	Power Supply 3x0,75mm ² with Rosette Ø75	4000	0,500
900162	Power Supply 5x0,50mm ² with Rosette Ø75	1000	0,120
900164	Power Supply 5x0,50mm ² with Rosette Ø75	2000	0,240
900166	Power Supply 5x0,50mm ² with Rosette Ø75	3000	0,360
900167	Power Supply 5x0,50mm ² with Rosette Ø75	4000	0,500



- For pendant use.

- Rosette from aluminium profile with 2m transparent cable 3x0,75mm² or 5x0,50mm² for dimmer or emergency versions in square or round version.

Code	Description	Kg
90042	Power Supply 3x0,75mm ² L 2m Ø80	0,130
90043	Power Supply 3x0,75mm ² L 2m Ø70	0,130
90044	Power Supply 3x0,75mm ² L 2m 80x80	0,210
90045	Power Supply 3x0,75mm ² L 2m 70x70	0,200
90048	Power Supply 5x0,50mm ² L 2m Ø100	0,250
90049	Power Supply 5x0,50mm ² L 2m 100x100	0,300