


IOKASTI

WALL LIGHTING INTERIOR

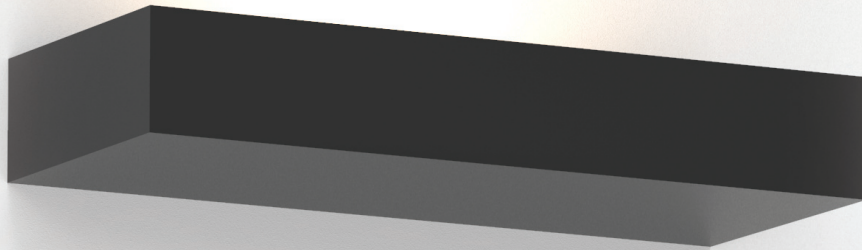

IOKASTI is surface wall mounted luminaire with LED source, ideal for a wide range of indoor applications.

Technical Features




- Aluminium body, painted electrostatically in selected colour.
- Steel mounting base.
- Connection for operation with 230V/50Hz.



IOKASTI

WALL LIGHTING INTERIOR

IOKASTI 1



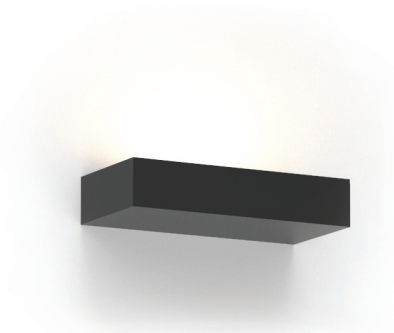


			IP 20	850°C	LED	
ta 25°C	Included 					

- Aluminium body.
- PMMA cover.
- 230V/50Hz.
- CRI: min. 80 / SDCM: 3
- 8W at 350mA.
- Luminous Efficacy:
201 Lm/W at 4000 K
189 Lm/W at 3000 K

Code	Description	Kg
85970	IOKASTI 1 APPLIQUE LED 8W Warm	0,600
85971	IOKASTI 1 APPLIQUE LED 8W Neutral	0,600

IOKASTI 2

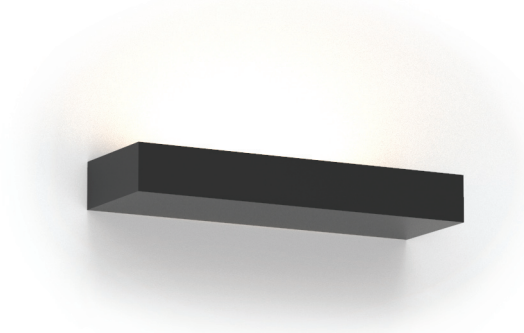

			IP 20	850°C	LED	
ta 25°C	Included 					

- Aluminium body.
- PMMA cover.
- 230V/50Hz.
- CRI: min. 80 / SDCM: 3
- 12W at 350mA.
- Luminous Efficacy:
201 Lm/W at 4000 K
189 Lm/W at 3000 K

Code	Description	Kg
85972	IOKASTI 2 APPLIQUE LED 12W Warm	0,900
85973	IOKASTI 2 APPLIQUE LED 12W Neutral	0,900

Colour Codes:

0 Colours 1 White 2 Titan 3 Black