

This Applique combines the architectural style with the efficiency. It produces perfect lighting conditions without annoying reflections and that is why it can be used from entrance areas to offices. It escapes the restrictions of the T16 lamp by using LED lighting points that can have any spacing pitch and this gives the light line enormous flexibility.

The visual benefit: The continuous-row system is illuminated absolutely uniformly from beginning to end, is economically efficient, is maintenance-free and it has long service life.

Technical Features

- Housing from aluminium profile, painted electrostatically in selected colour.
- Removable plastic heads.
- High efficient diffuser in opal PMMA or anaglyph edition.
- Flow recuperator in white colour.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V-50/60Hz.


Upon request:

- Available with highest colour rendering index (CRI).
- Connection for emergency lighting system, for one or three hours.

HIGH/ LOW/ HIGH-LOW APPLIQUE

WALL LIGHTING INTERIOR

HIGH APPLIQUE

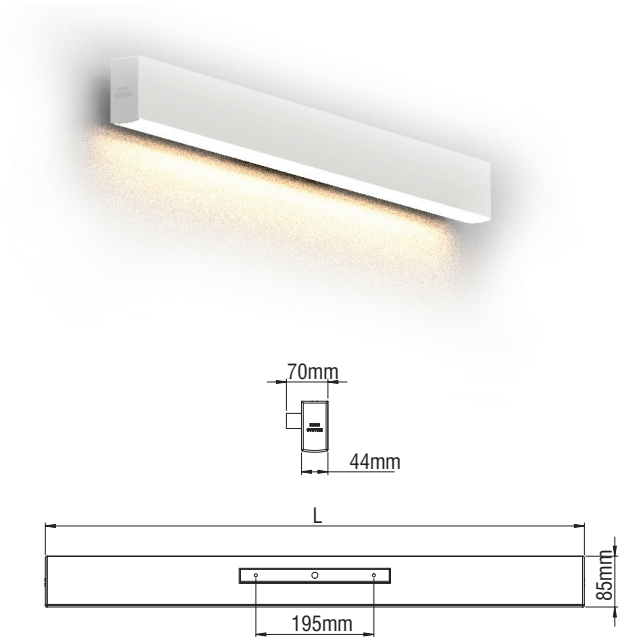


- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
96183	High Applique Led 24W Neutral	860	2,100
96184	High Applique Led 32W Neutral	1140	2,500
96185	High Applique Led 40W Neutral	1420	3,200
96186	High Applique Led 24W Warm	860	2,100
96187	High Applique Led 32W Warm	1140	2,500
96188	High Applique Led 40W Warm	1420	3,200

For dimmer version add letter “D” at the end of product code.

HIGH SURFACE APPLIQUE

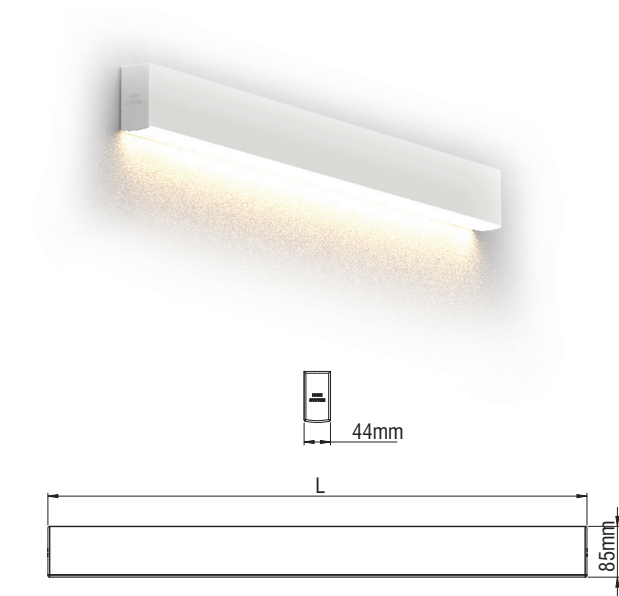

- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA


Code	Description	L	Kg
96195	High Surface Applique Led 16W Neutral	580	1,700
96189	High Surface Applique Led 24W Neutral	860	2,100
96190	High Surface Applique Led 32W Neutral	1140	2,500
96191	High Surface Applique Led 40W Neutral	1420	3,200
96196	High Surface Applique Led 16W Warm	580	1,700
96192	High Surface Applique Led 24W Warm	860	2,100
96193	High Surface Applique Led 32W Warm	1140	2,500
96194	High Surface Applique Led 40W Warm	1420	3,200

For dimmer version add letter “D” at the end of product code.

HIGH/ LOW/ HIGH-LOW APPLIQUE

WALL LIGHTING INTERIOR

LOW APPLIQUE

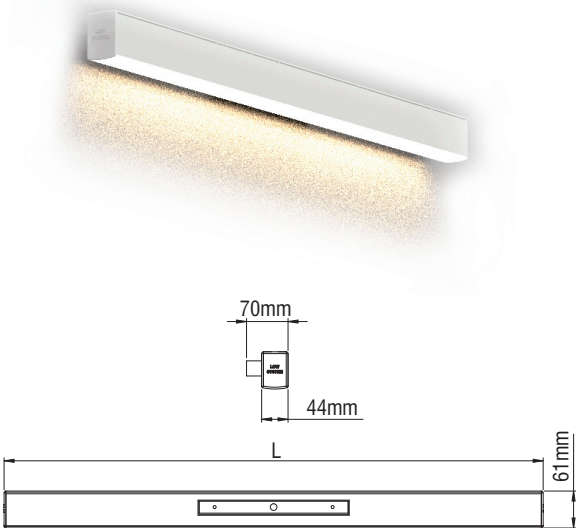


- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
97583	Low Applique Led 24W Neutral	860	2,000
97584	Low Applique Led 32W Neutral	1140	2,400
97585	Low Applique Led 40W Neutral	1420	3,000
97586	Low Applique Led 24W Warm	860	2,000
97587	Low Applique Led 32W Warm	1140	2,400
97588	Low Applique Led 40W Warm	1420	3,000

For dimmer version add letter “D” at the end of product code.

LOW SURFACE APPLIQUE

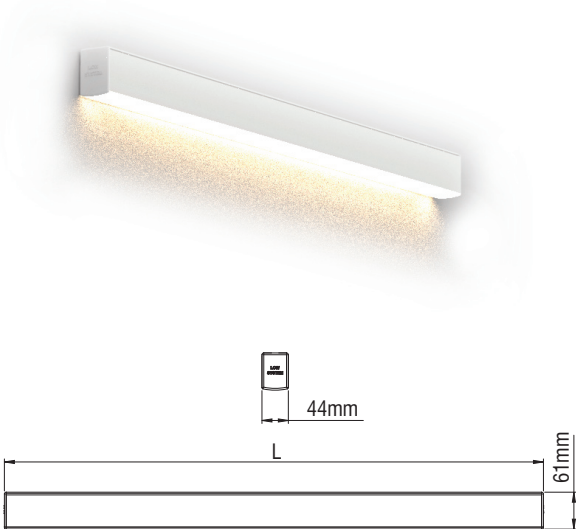

- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA


Code	Description	L	Kg
97595	Low Surface Applique Led 16W Neutral	580	1,600
97589	Low Surface Applique Led 24W Neutral	860	2,000
97590	Low Surface Applique Led 32W Neutral	1140	2,400
97591	Low Surface Applique Led 40W Neutral	1420	3,000
97596	Low Surface Applique Led 16W Warm	580	1,600
97592	Low Surface Applique Led 24W Warm	860	2,000
97593	Low Surface Applique Led 32W Warm	1140	2,400
97594	Low Surface Applique Led 40W Warm	1420	3,000

For dimmer version add letter “D” at the end of product code.

HIGH/ LOW/ HIGH-LOW APPLIQUE

WALL LIGHTING INTERIOR

HIGH - LOW UP/ DOWN APPLIQUE

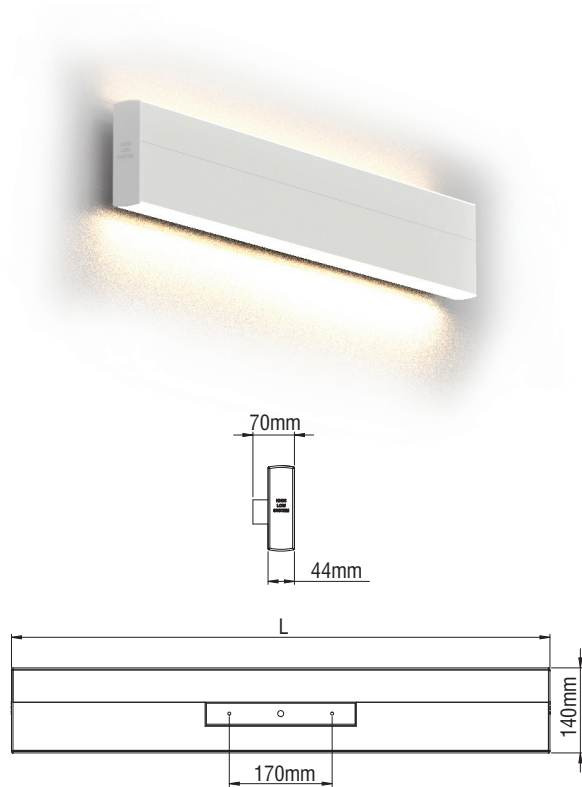


- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
98685	High Low Up /Down Applique Led 24W+24W Neutral	860	3,500
98686	High Low Up /Down Applique Led 32W+32W Neutral	1140	3,900
98687	High Low Up /Down Applique Led 40W+40W Neutral	1420	4,700
98688	High Low Up /Down Applique Led 24W+24W Warm	860	3,500
98689	High Low Up /Down Applique Led 32W+32W Warm	1140	3,900
98690	High Low Up /Down Applique Led 40W+40W Warm	1420	4,700

For dimmer version add letter “D” at the end of product code.

HIGH- LOW UP/ DOWN SURFACE APPLIQUE

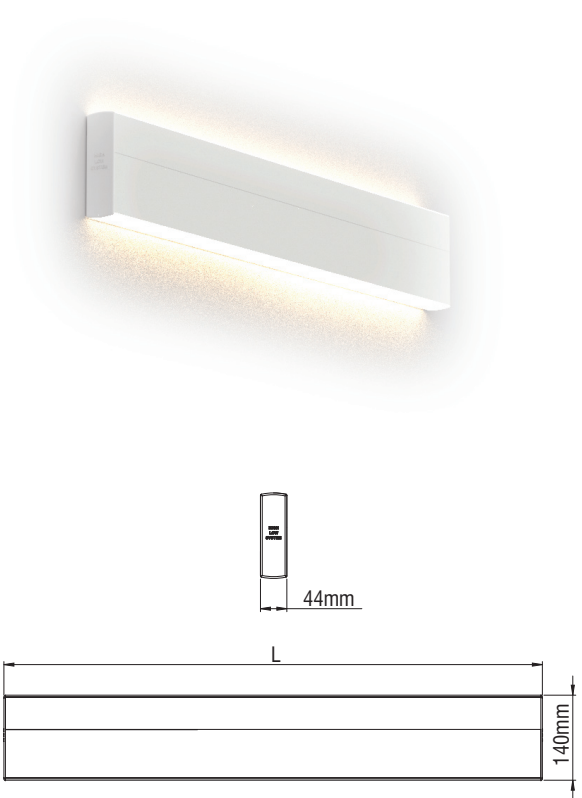

- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
98697	High Low Up /Down Surface Applique Led 16W+16W Neutral	580	3,100
98691	High Low Up /Down Surface Applique Led 24W+24W Neutral	860	3,500
98692	High Low Up /Down Surface Applique Led 32W+32W Neutral	1140	3,900
98693	High Low Up /Down Surface Applique Led 40W+40W Neutral	1420	4,700
98698	High Low Up /Down Surface Applique Led 16W+16W Warm	580	3,100
98694	High Low Up /Down Surface Applique Led 24W+24W Warm	860	3,500
98695	High Low Up /Down Surface Applique Led 32W+32W Warm	1140	3,900
98696	High Low Up /Down Surface Applique Led 40W+40W Warm	1420	4,700

For dimmer version add letter “D” at the end of product code.

Colour Codes:

0 Colours 1 White 2 Titan 3 Black

