


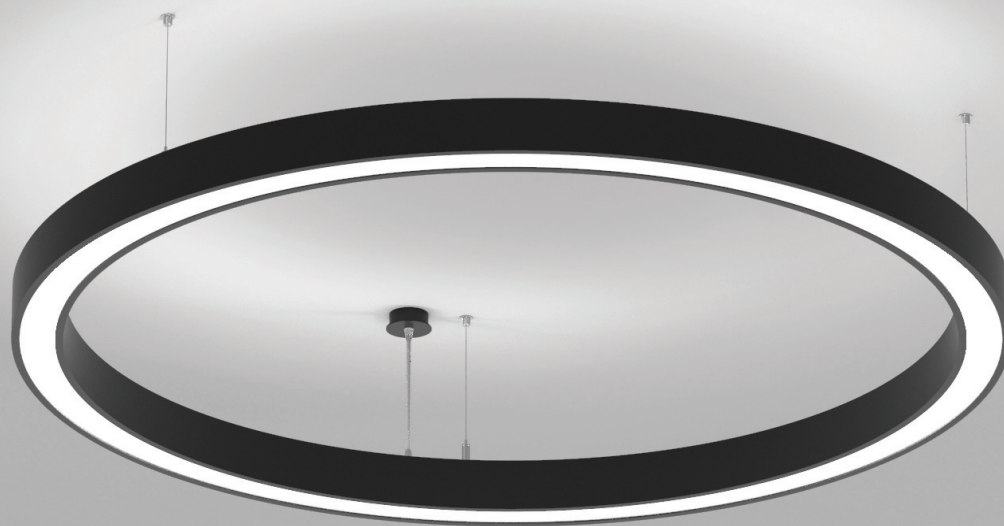


This luminaire combines the architectural style with the efficiency. It produces perfect lighting conditions without annoying reflections and that is why it can be used from entrance areas to offices. The visual benefit: The continuous-row system is illuminated absolutely uniformly from beginning to end, is economically efficient, is maintenance-free and it has long service life.

Technical Features

- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- Direct and indirect illumination.
- Pure light without IR/UV radiation.
- Only for pendant installation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V-50/60Hz.



Upon request:

- Connection for emergency lighting system, for one or three hours.
- With microprismatic cover *.

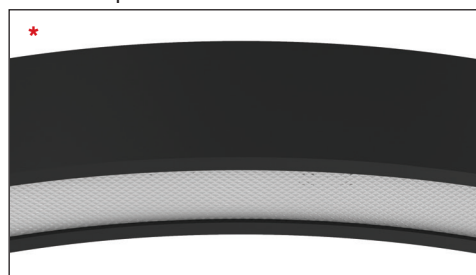

CYCLONE SLIM UP DOWN

ARCHITECTURAL SURFACE & PENDANT LUMINAIRES

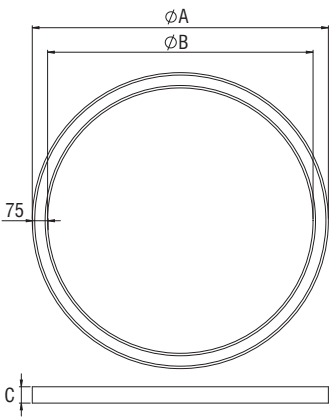

CE

F

CB

IP 20

LED

5 YEARS WARRANTY

ta 25°C

Included

- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description	Dimensions mm		
		ØA	ØB	C
8245052	Cyclone Slim 1 Up Down 38W Warm*	600	450	80
8245053	Cyclone Slim 1 Up Down 38W Neutral*	600	450	80
8245062	Cyclone Slim 2 Up Down 52W Warm	800	650	80
8245063	Cyclone Slim 2 Up Down 52W Neutral	800	650	80
8245072	Cyclone Slim 3 Up Down 79W Warm	1100	950	80
8245073	Cyclone Slim 3 Up Down 79W Neutral	1100	950	80
8245082	Cyclone Slim 4 Up Down 99W Warm	1450	1300	80
8245083	Cyclone Slim 4 Up Down 99W Neutral	1450	1300	80

For dimmer version add letter “D” at the end of product code.
* At dimmer version the driver is placed out of the body.

Colour Codes:

0

 Colours

1

 White

2




 Titan

3

 Black

CYCLONE SLIM UP DOWN

CYCLONE SLIM PART UP DOWN

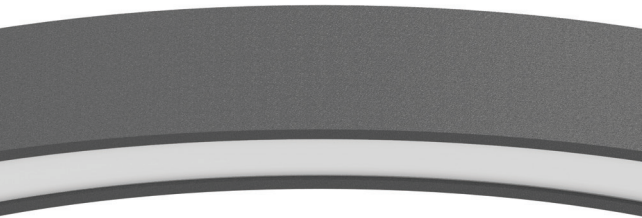

Colour Codes:

0 Colours 1 White 2 Titan 3 Black

ARCHITECTURAL SURFACE & PENDANT LUMINAIRES



- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description	Dimensions mm		
		ØA	B	C ^(o)
8245362	Cyclone Slim 5 Part Up Down 50W Warm	2000-1850	1700	120
8245363	Cyclone Slim 5 Part Up Down 50W Neutral	2000-1850	1700	120
8245372	Cyclone Slim 6 Part Up Down 43W Warm	3000-2850	1675	72
8245373	Cyclone Slim 6 Part Up Down 43W Neutral	3000-2850	1675	72
8245382	Cyclone Slim 7 Part Up Down 43W Warm	4000-3850	1670	51
8245383	Cyclone Slim 7 Part Up Down 43W Neutral	4000-3850	1670	51
8245392	Cyclone Slim 8 Part Up Down 53W Warm	5000-4850	2100	51
8245393	Cyclone Slim 8 Part Up Down 53W Neutral	5000-4850	2100	51

For dimmer version add letter “D” at the end of product code.




- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description	Dimensions mm		
		A	B	C
8245402	Cyclone Slim 9 Part Up Down 29W Warm	1200	75	80
8245403	Cyclone Slim 9 Part Up Down 29W Neutral	1200	75	80
8245412	Cyclone Slim 10 Part Up Down 16W Warm	600	75	80
8245413	Cyclone Slim 10 Part Up Down 16W Neutral	600	75	80
8245422	Cyclone Slim 11 Part Up Down 8W Warm	300	75	80
8245423	Cyclone Slim 11 Part Up Down 8W Neutral	300	75	80

For dimmer version add letter “D” at the end of product code.

CYCLONE SLIM UP DOWN

SINGLE ADJUSTABLE SUSPENSION




POWER SUPPLY



- Stainless steel cable and regulators.
- **Required:**
3 pieces for each luminaire.

Code	Description	L	Kg
900111	Single Suspension	500	0,050
900112	Single Suspension	1000	0,100
900113	Single Suspension	1500	0,150
900114	Single Suspension	2000	0,200
900116	Single Suspension	3000	0,300



- Plastic body.
- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.

Code	Description	L	Kg
900122	Power Supply 3x0,75mm ² with Rosette Ø75	1000	0,120
900124	Power Supply 3x0,75mm ² with Rosette Ø75	2000	0,240
900126	Power Supply 3x0,75mm ² with Rosette Ø75	3000	0,360
900127	Power Supply 3x0,75mm ² with Rosette Ø75	4000	0,500
900162	Power Supply 5x0,50mm ² with Rosette Ø75	1000	0,120
900164	Power Supply 5x0,50mm ² with Rosette Ø75	2000	0,240
900166	Power Supply 5x0,50mm ² with Rosette Ø75	3000	0,360
900167	Power Supply 5x0,50mm ² with Rosette Ø75	4000	0,500

POWER SUPPLY



- For pendant use.
- Rosette from aluminium profile with 2m transparent cable 3x0,75mm² or 5x0,50mm² for dimmer or emergency versions in square or round version.

Code	Description	Kg
90042	Power Supply 3x0,75mm ² L 2m Ø80	0,130
90043	Power Supply 3x0,75mm ² L 2m Ø70	0,130
90044	Power Supply 3x0,75mm ² L 2m 80x80	0,210
90045	Power Supply 3x0,75mm ² L 2m 70x70	0,200
90048	Power Supply 5x0,50mm ² L 2m Ø100	0,250
90049	Power Supply 5x0,50mm ² L 2m 100x100	0,300

Colour Codes:

0 Colours 1 White 2 Titan 3 Black