

CYCLONE HIGH

ARCHITECTURAL SURFACE & PENDANT LUMINAIRES




This luminaire combines the architectural style with the efficiency. It produces perfect lighting conditions without annoying reflections and that is why it can be used from entrance areas to offices. It escapes the restrictions of the T16 lamp by using LED lighting points that can have any spacing pitch and this gives the light line enormous flexibility. The visual benefit: The continuous-row system is illuminated absolutely uniformly from beginning to end, is economically efficient, is maintenance-free and it has long service life.

Technical Features

- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- Direct illumination.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V-50/60Hz.

Upon request:

- Available in Up/ Down edition.
- At special dimensions.
- Connection for emergency lighting system, for one or three hours.

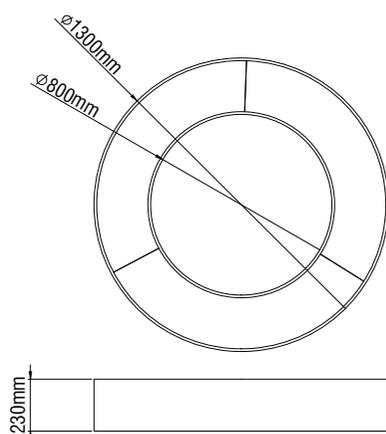

- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA


Code	Description
8241432	Cyclone High 138W Warm
8241433	Cyclone High 138W Neutral

For dimmer version add letter "D" at the end of product code.

Colour Codes:			
0	Colours	1	White
2	Titan	3	Black

CYCLONE HIGH

SINGLE ADJUSTABLE SUSPENSION



POWER SUPPLY



POWER SUPPLY



Colour Codes:

0 Colours 1 White 2 Titan 3 Black

ARCHITECTURAL SURFACE & PENDANT LUMINAIRES



- Stainless steel cable and regulators.
- **Required:**
4 pieces for each luminaire.

Code	Description	L	Kg
900111	Single Suspension	500	0,050
900112	Single Suspension	1000	0,100
900113	Single Suspension	1500	0,150
900114	Single Suspension	2000	0,200
900116	Single Suspension	3000	0,300



- Plastic body.
- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.

Code	Description	L	Kg
900122	Power Supply 3x0,75mm ² with Rosette Ø75	1000	0,120
900124	Power Supply 3x0,75mm ² with Rosette Ø75	2000	0,240
900126	Power Supply 3x0,75mm ² with Rosette Ø75	3000	0,360
900127	Power Supply 3x0,75mm ² with Rosette Ø75	4000	0,500
900162	Power Supply 5x0,50mm ² with Rosette Ø75	1000	0,120
900164	Power Supply 5x0,50mm ² with Rosette Ø75	2000	0,240
900166	Power Supply 5x0,50mm ² with Rosette Ø75	3000	0,360
900167	Power Supply 5x0,50mm ² with Rosette Ø75	4000	0,500



- For pendant use.
- Body from aluminium profile.
- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.
- Square or round version.

Code	Description	Kg
90042	Power Supply 3x0,75mm ² L 2m Ø80	0,130
90043	Power Supply 3x0,75mm ² L 2m Ø70	0,130
90044	Power Supply 3x0,75mm ² L 2m 80x80	0,210
90045	Power Supply 3x0,75mm ² L 2m 70x70	0,200
90048	Power Supply 5x0,50mm ² L 2m Ø100	0,250
90049	Power Supply 5x0,50mm ² L 2m 100x100	0,300