


OMICRON

PROFESSIONAL SURFACE & PENDANT LUMINAIRES

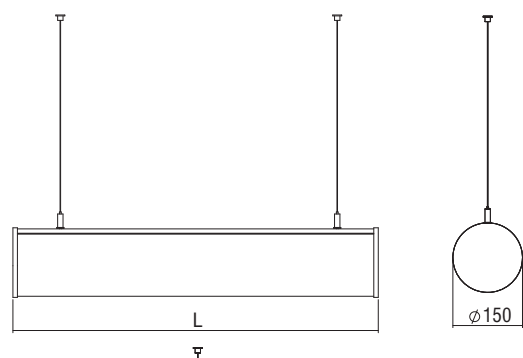

A linear suspended luminaire with impressive design. The luminaire unit is made of an opal diffuser and raises the architectural interest because it appears almost immaterial. It is ideal for applications where diffuse lighting must be combined an elegant shape.

Technical Features

- Housing from aluminium profile, painted electrostatically in white colour.
- High efficient diffuser from methacrylate PMMA.
- Removable plastic heads painted in white colour.
- Flow recuperator in white colour.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux.

OMICRON LED Ø 150mm

- Version for LED.
- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy at 350mA:
201 Lm/Watt (4000K)
189 Lm/Watt (3000K)




Code	Description	L	Kg
828601	Omicron Led 36W Warm	1160	3,900
828611	Omicron Led 36W Neutral	1160	3,900
828621	Omicron Led 53W Warm	1720	5,200
828631	Omicron Led 53W Neutral	1720	5,200
828641	Omicron Led 70W Warm	2280	6,900
828651	Omicron Led 70W Neutral	2280	6,900

For dimmer version add letter “D” at the end of product code.

OMICRON

SINGLE ADJUSTABLE SUSPENSION




POWER SUPPLY



POWER SUPPLY



SCONCE BASE



Colour Codes:

0 Colours 1 White 2 Titan 3 Black 5 matt Alum.

PROFESSIONAL SURFACE & PENDANT LUMINAIRES



- Stainless steel cable and regulators.
- **Required:**
2 pieces for up to 3m profile.

Code	Description	L	Kg
900111	Single Suspension	500	0,050
900112	Single Suspension	1000	0,100
900113	Single Suspension	1500	0,150
900114	Single Suspension	2000	0,200
900116	Single Suspension	3000	0,300



- Plastic body.
- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.

Code	Description	L	Kg
900122	Power Supply 3x0,75mm ² with Rosette Ø75	1000	0,120
900124	Power Supply 3x0,75mm ² with Rosette Ø75	2000	0,240
900126	Power Supply 3x0,75mm ² with Rosette Ø75	3000	0,360
900127	Power Supply 3x0,75mm ² with Rosette Ø75	4000	0,500
900162	Power Supply 5x0,50mm ² with Rosette Ø75	1000	0,120
900164	Power Supply 5x0,50mm ² with Rosette Ø75	2000	0,240
900166	Power Supply 5x0,50mm ² with Rosette Ø75	3000	0,360
900167	Power Supply 5x0,50mm ² with Rosette Ø75	4000	0,500



- For pendant use.
- Body from aluminium profile.
- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.
- Square or round version.

Code	Description	Kg
90042	Power Supply 3x0,75mm ² L 2m Ø80	0,130
90043	Power Supply 3x0,75mm ² L 2m Ø70	0,130
90044	Power Supply 3x0,75mm ² L 2m 80x80	0,210
90045	Power Supply 3x0,75mm ² L 2m 70x70	0,200
90048	Power Supply 5x0,50mm ² L 2m Ø100	0,250
90049	Power Supply 5x0,50mm ² L 2m 100x100	0,300



- For applique version.
- Body from aluminium profile.

Code	Description	Kg
90013	Sconce Base	0,160