


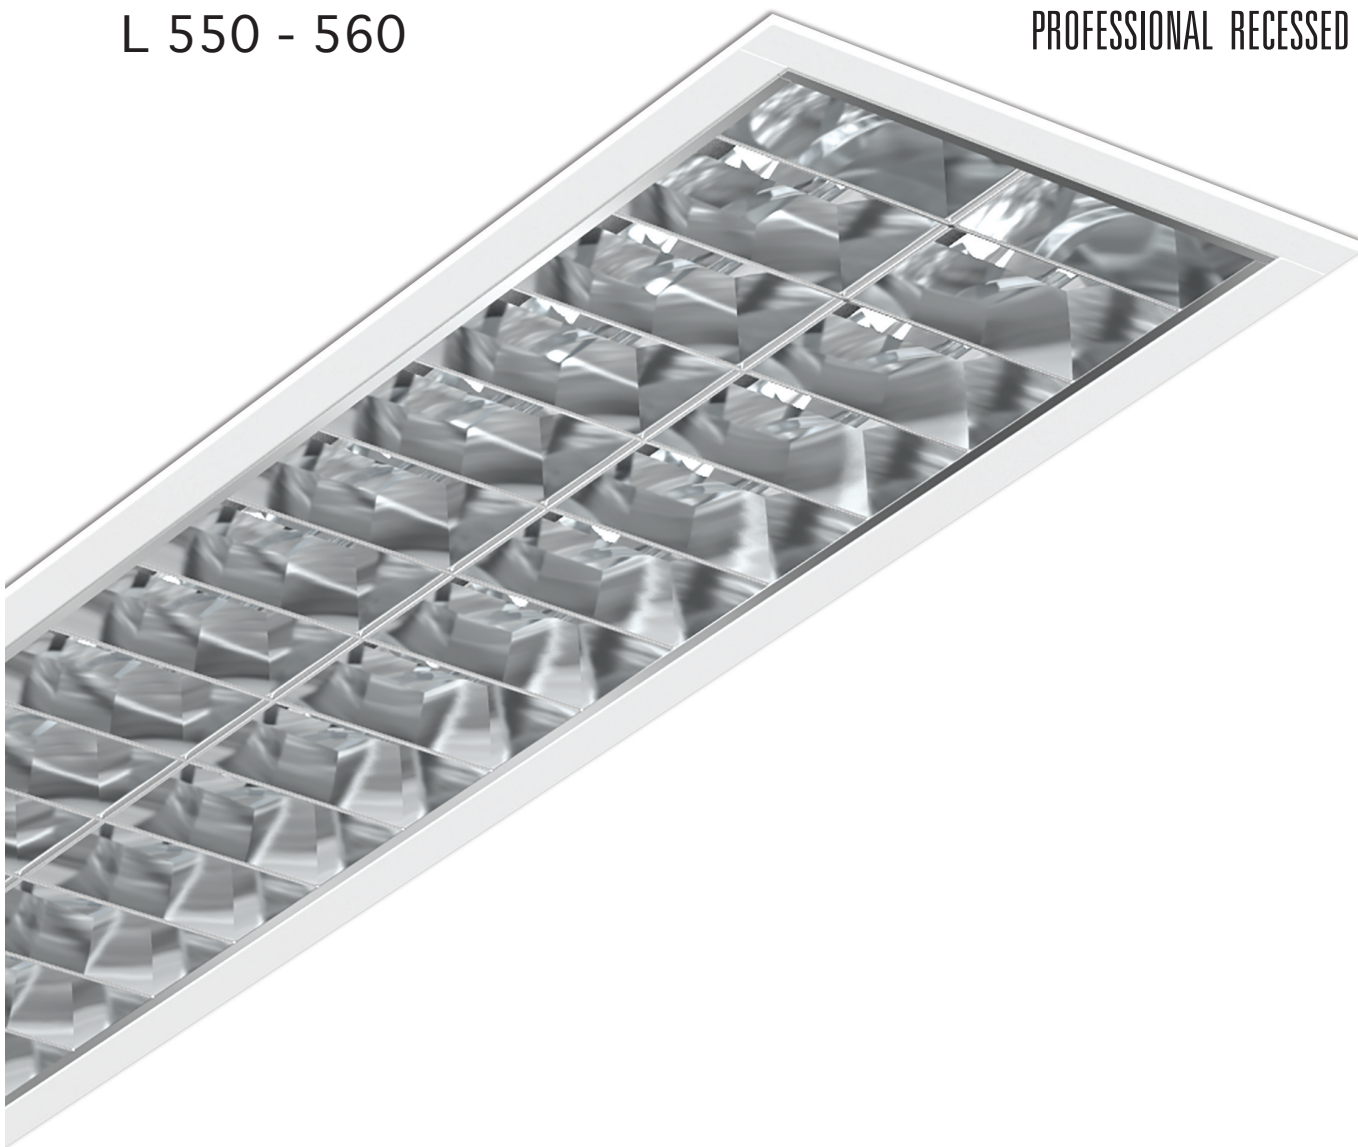

Technical Features


- Steel body, electrostatically painted in white color.
- High efficient opal PMMA for PSPO Led, microprismatic and aluminium louvre with high efficient satin PMMA cover for louvre version.
- Last generation high efficient LED CHIP.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).

- UGR<19 at specific editions:
Glare Evaluation: X=4H/ Y=8H S=0,25H, reflection factors 70/50/20.
- For DSE work stations: $\gamma \geq 65^\circ$ <3000cd/m².
- Connection for operation on 230V/50-60Hz.


Upon request:

- Connection for emergency lighting system, for one or three hours.


Recessed luminaires in **staves pitch width** 100, 150, 200, 300mm, or **plasterboard** ceiling.




Staves pitch with width 100-200mm, luminaires LP 560. Fixing brackets item 15 DP, 15 GF.



Staves pitch with width 100mm, luminaires LP 560. Fixing brackets item 15 DP, 15 GF.



Staves pitch with width 100-150-300mm, luminaires LP 550. Fixing brackets item 15 DP, 15 GF.




Plasterboard ceiling. Fixing bracket item 15BS.


L 550 - 560

PROFESSIONAL RECESSED LUMINAIRES


L550 - 560 LP2M LED

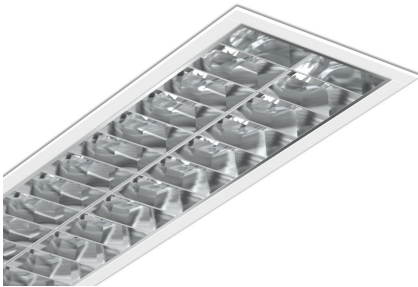


LP2M 551




LP2M 552



LP2M 562



- Steel body.
- Screen 2M with high efficient satin PMMA cover for led source.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

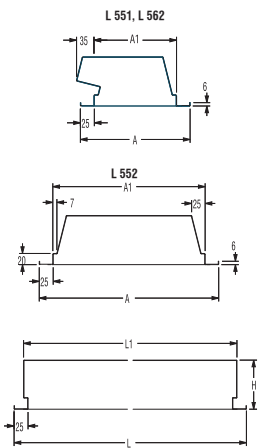

Description (High Efficiency 250mA)	Staves pitch width	Dimensions					Code
		A	L	H	A1	L1	
LP2M 551 LED 14W Warm	150	196	647	95	148	613	3318403
LP2M 551 LED 14W Neutral	150	196	647	95	148	613	3318413
LP2M 551 LED 25W Warm	150	196	1256	95	148	1222	3318443
LP2M 551 LED 25W Neutral	150	196	1256	95	148	1222	3318453
LP2M 551 LED 31W Warm	150	196	1556	95	148	1522	3318483
LP2M 551 LED 31W Neutral	150	196	1556	95	148	1522	3318493
LP2M 552 LED 25W Warm	100, 150, 300	321	647	95	273	613	3318603
LP2M 552 LED 25W Neutral	100, 150, 300	321	647	95	273	613	3318613
LP2M 552 LED 49W Warm	100, 150, 300	321	1256	95	273	1222	3318643
LP2M 552 LED 49W Neutral	100, 150, 300	321	1256	95	273	1222	3318653
LP2M 552 LED 60W Warm	100, 150, 300	321	1556	95	273	1522	3318683
LP2M 552 LED 60W Neutral	100, 150, 300	321	1556	95	273	1522	3318693
LP2M 562 LED 25W Warm	100, 200	238	647	95	190	613	3415603
LP2M 562 LED 25W Neutral	100, 200	238	647	95	190	613	3415613
LP2M 562 LED 49W Warm	100, 200	238	1256	95	190	1222	3415643
LP2M 562 LED 49W Neutral	100, 200	238	1256	95	190	1222	3415653
LP2M 562 LED 60W Warm	100, 200	238	1556	95	190	1522	3415683
LP2M 562 LED 60W Neutral	100, 200	238	1556	95	190	1522	3415693


Description (High Output 350mA)	Staves pitch width	Dimensions					Code
		A	L	H	A1	L1	
LP2M 551 LED 19W Warm	150	196	647	95	148	613	3318423
LP2M 551 LED 19W Neutral	150	196	647	95	148	613	3318433
LP2M 551 LED 36W Warm	150	196	1256	95	148	1222	3318463
LP2M 551 LED 36W Neutral	150	196	1256	95	148	1222	3318473
LP2M 551 LED 44W Warm	150	196	1556	95	148	1522	3318503
LP2M 551 LED 44W Neutral	150	196	1556	95	148	1522	3318513
LP2M 552 LED 36W Warm	100, 150, 300	321	647	95	273	613	3318623
LP2M 552 LED 36W Neutral	100, 150, 300	321	647	95	273	613	3318633
LP2M 552 LED 70W Warm	100, 150, 300	321	1256	95	273	1222	3318663
LP2M 552 LED 70W Neutral	100, 150, 300	321	1256	95	273	1222	3318673
LP2M 552 LED 86W Warm	100, 150, 300	321	1556	95	273	1522	3318703
LP2M 552 LED 86W Neutral	100, 150, 300	321	1556	95	273	1522	3318713
LP2M 562 LED 36W Warm	100, 200	238	647	95	190	613	3415623
LP2M 562 LED 36W Neutral	100, 200	238	647	95	190	613	3415633
LP2M 562 LED 70W Warm	100, 200	238	1256	95	190	1222	3415663
LP2M 562 LED 70W Neutral	100, 200	238	1256	95	190	1222	3415673
LP2M 562 LED 86W Warm	100, 200	238	1556	95	190	1522	3415703
LP2M 562 LED 86W Neutral	100, 200	238	1556	95	190	1522	3415713

For dimmer version add letter “D” at the end of product code.


L 550 - 560

PROFESSIONAL RECESSED LUMINAIRES


L550 - 560 LP3M LED

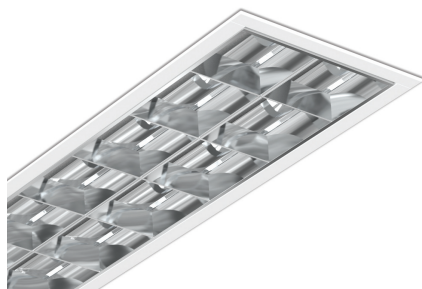


LP3M 551



LP3M 552



LP3M 562




- Steel body.
- Screen 3M with high efficient satin PMMA cover for led source.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

Description (High Efficiency 250mA)	Staves pitch width	Dimensions					Code
		A	L	H	A1	L1	
LP3M 551 LED 14W Warm	150	196	647	95	148	613	3338403
LP3M 551 LED 14W Neutral	150	196	647	95	148	613	3338413
LP3M 551 LED 25W Warm	150	196	1256	95	148	1222	3338443
LP3M 551 LED 25W Neutral	150	196	1256	95	148	1222	3338453
LP3M 551 LED 31W Warm	150	196	1556	95	148	1522	3338483
LP3M 551 LED 31W Neutral	150	196	1556	95	148	1522	3338493
LP3M 552 LED 25W Warm	100, 150, 300	321	647	95	273	613	3338603
LP3M 552 LED 25W Neutral	100, 150, 300	321	647	95	273	613	3338613
LP3M 552 LED 49W Warm	100, 150, 300	321	1256	95	273	1222	3338643
LP3M 552 LED 49W Neutral	100, 150, 300	321	1256	95	273	1222	3338653
LP3M 552 LED 60W Warm	100, 150, 300	321	1556	95	273	1522	3338683
LP3M 552 LED 60W Neutral	100, 150, 300	321	1556	95	273	1522	3338693
LP3M 562 LED 25W Warm	100, 200	238	647	95	190	613	3435603
LP3M 562 LED 25W Neutral	100, 200	238	647	95	190	613	3435613
LP3M 562 LED 49W Warm	100, 200	238	1256	95	190	1222	3435643
LP3M 562 LED 49W Neutral	100, 200	238	1256	95	190	1222	3435653
LP3M 562 LED 60W Warm	100, 200	238	1556	95	190	1522	3435683
LP3M 562 LED 60W Neutral	100, 200	238	1556	95	190	1522	3435693

Description (High Output 350mA)	Staves pitch width	Dimensions					Code
		A	L	H	A1	L1	
LP3M 551 LED 19W Warm	150	196	647	95	148	613	3338423
LP3M 551 LED 19W Neutral	150	196	647	95	148	613	3338433
LP3M 551 LED 36W Warm	150	196	1256	95	148	1222	3338463
LP3M 551 LED 36W Neutral	150	196	1256	95	148	1222	3338473
LP3M 551 LED 44W Warm	150	196	1556	95	148	1522	3338503
LP3M 551 LED 44W Neutral	150	196	1556	95	148	1522	3338513
LP3M 552 LED 36W Warm	100, 150, 300	321	647	95	273	613	3338623
LP3M 552 LED 36W Neutral	100, 150, 300	321	647	95	273	613	3338633
LP3M 552 LED 70W Warm	100, 150, 300	321	1256	95	273	1222	3338663
LP3M 552 LED 70W Neutral	100, 150, 300	321	1256	95	273	1222	3338673
LP3M 552 LED 86W Warm	100, 150, 300	321	1556	95	273	1522	3338703
LP3M 552 LED 86W Neutral	100, 150, 300	321	1556	95	273	1522	3338713
LP3M 562 LED 36W Warm	100, 200	238	647	95	190	613	3435623
LP3M 562 LED 36W Neutral	100, 200	238	647	95	190	613	3435633
LP3M 562 LED 70W Warm	100, 200	238	1256	95	190	1222	3435663
LP3M 562 LED 70W Neutral	100, 200	238	1256	95	190	1222	3435673
LP3M 562 LED 86W Warm	100, 200	238	1556	95	190	1522	3435703
LP3M 562 LED 86W Neutral	100, 200	238	1556	95	190	1522	3435713

For dimmer version add letter "D" at the end of product code.

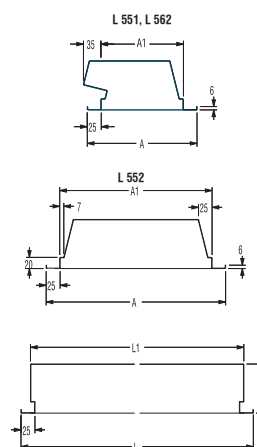


L 550 - 560

PROFESSIONAL RECESSED LUMINAIRES


L550 - 560 LSP0 LED




LSP0 551




LSP0 552



LSP0 562



- Steel body.
- High efficient satin PMMA cover.
- Frame made of white painted steel, with steel springs for adjusting the cover to the body of the luminaire.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

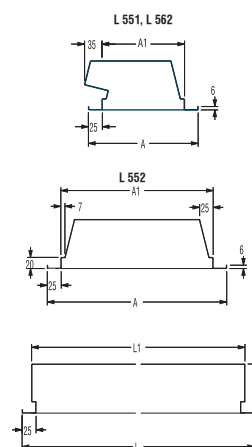

Description (High Efficiency 250mA)	Staves pitch width	Dimensions					Code
		A	L	H	A1	L1	
LSP0 551 LED 14W Warm	150	196	647	95	148	613	3308403
LSP0 551 LED 14W Neutral	150	196	647	95	148	613	3308413
LSP0 551 LED 25W Warm	150	196	1256	95	148	1222	3308443
LSP0 551 LED 25W Neutral	150	196	1256	95	148	1222	3308453
LSP0 551 LED 31W Warm	150	196	1556	95	148	1522	3308483
LSP0 551 LED 31W Neutral	150	196	1556	95	148	1522	3308493
LSP0 552 LED 25W Warm	100, 150, 300	321	647	95	273	613	3308603
LSP0 552 LED 25W Neutral	100, 150, 300	321	647	95	273	613	3308613
LSP0 552 LED 49W Warm	100, 150, 300	321	1256	95	273	1222	3308643
LSP0 552 LED 49W Neutral	100, 150, 300	321	1256	95	273	1222	3308653
LSP0 552 LED 60W Warm	100, 150, 300	321	1556	95	273	1522	3308683
LSP0 552 LED 60W Neutral	100, 150, 300	321	1556	95	273	1522	3308693
LSP0 562 LED 25W Warm	100, 200	238	647	95	190	613	3405603
LSP0 562 LED 25W Neutral	100, 200	238	647	95	190	613	3405613
LSP0 562 LED 49W Warm	100, 200	238	1256	95	190	1222	3405643
LSP0 562 LED 49W Neutral	100, 200	238	1256	95	190	1222	3405653
LSP0 562 LED 60W Warm	100, 200	238	1556	95	190	1522	3405683
LSP0 562 LED 60W Neutral	100, 200	238	1556	95	190	1522	3405693
Description (High Output 350mA)	Staves pitch width	Dimensions					Code
		A	L	H	A1	L1	
LSP0 551 LED 19W Warm	150	196	647	95	148	613	3308423
LSP0 551 LED 19W Neutral	150	196	647	95	148	613	3308433
LSP0 551 LED 36W Warm	150	196	1256	95	148	1222	3308463
LSP0 551 LED 36W Neutral	150	196	1256	95	148	1222	3308473
LSP0 551 LED 44W Warm	150	196	1556	95	148	1522	3308503
LSP0 551 LED 44W Neutral	150	196	1556	95	148	1522	3308513
LSP0 552 LED 36W Warm	100, 150, 300	321	647	95	273	613	3308623
LSP0 552 LED 36W Neutral	100, 150, 300	321	647	95	273	613	3308633
LSP0 552 LED 70W Warm	100, 150, 300	321	1256	95	273	1222	3308663
LSP0 552 LED 70W Neutral	100, 150, 300	321	1256	95	273	1222	3308673
LSP0 552 LED 86W Warm	100, 150, 300	321	1556	95	273	1522	3308703
LSP0 552 LED 86W Neutral	100, 150, 300	321	1556	95	273	1522	3308713
LSP0 562 LED 36W Warm	100, 200	238	647	95	190	613	3405623
LSP0 562 LED 36W Neutral	100, 200	238	647	95	190	613	3405633
LSP0 562 LED 70W Warm	100, 200	238	1256	95	190	1222	3405663
LSP0 562 LED 70W Neutral	100, 200	238	1256	95	190	1222	3405673
LSP0 562 LED 86W Warm	100, 200	238	1556	95	190	1522	3405703
LSP0 562 LED 86W Neutral	100, 200	238	1556	95	190	1522	3405713

For dimmer version add letter "D" at the end of product code.


L 550 - 560

PROFESSIONAL RECESSED LUMINAIRES


L550 - 560 MICROPRISMATIC LED




MICROPRISMATIC 551



MICROPRISMATIC 552



MICROPRISMATIC 562



- Steel body.
- High efficient microprismatic PMMA cover.
- Frame made of white painted steel, with steel springs for adjusting the cover to the body of the luminaire.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

Description (High Efficiency 250mA)	Staves pitch width	Dimensions					Code
		A	L	H	A1	L1	
MICROPRISMATIC 551 LED 14W Warm	150	196	647	95	148	613	3348403
MICROPRISMATIC 551 LED 14W Neutral	150	196	647	95	148	613	3348413
MICROPRISMATIC 551 LED 25W Warm	150	196	1256	95	148	1222	3348443
MICROPRISMATIC 551 LED 25W Neutral	150	196	1256	95	148	1222	3348453
MICROPRISMATIC 551 LED 31W Warm	150	196	1556	95	148	1522	3348483
MICROPRISMATIC 551 LED 31W Neutral	150	196	1556	95	148	1522	3348493

MICROPRISMATIC 552 LED 25W Warm	100, 150, 300	321	647	95	273	613	3348603
MICROPRISMATIC 552 LED 25W Neutral	100, 150, 300	321	647	95	273	613	3348613
MICROPRISMATIC 552 LED 49W Warm	100, 150, 300	321	1256	95	273	1222	3348643
MICROPRISMATIC 552 LED 49W Neutral	100, 150, 300	321	1256	95	273	1222	3348653
MICROPRISMATIC 552 LED 60W Warm	100, 150, 300	321	1556	95	273	1522	3348683
MICROPRISMATIC 552 LED 60W Neutral	100, 150, 300	321	1556	95	273	1522	3348693


MICROPRISMATIC 562 LED 25W Warm	100, 200	238	647	95	190	613	3445603
MICROPRISMATIC 562 LED 25W Neutral	100, 200	238	647	95	190	613	3445613
MICROPRISMATIC 562 LED 49W Warm	100, 200	238	1256	95	190	1222	3445643
MICROPRISMATIC 562 LED 49W Neutral	100, 200	238	1256	95	190	1222	3445653
MICROPRISMATIC 562 LED 60W Warm	100, 200	238	1556	95	190	1522	3445683
MICROPRISMATIC 562 LED 60W Neutral	100, 200	238	1556	95	190	1522	3445693

Description (High Output 350mA)	Staves pitch width	Dimensions					Code
		A	L	H	A1	L1	
MICROPRISMATIC 551 LED 19W Warm	150	196	647	95	148	613	3348423
MICROPRISMATIC 551 LED 19W Neutral	150	196	647	95	148	613	3348433
MICROPRISMATIC 551 LED 36W Warm	150	196	1256	95	148	1222	3348463
MICROPRISMATIC 551 LED 36W Neutral	150	196	1256	95	148	1222	3348473
MICROPRISMATIC 551 LED 44W Warm	150	196	1556	95	148	1522	3348503
MICROPRISMATIC 551 LED 44W Neutral	150	196	1556	95	148	1522	3348513

MICROPRISMATIC 552 LED 36W Warm	100, 150, 300	321	647	95	273	613	3348623
MICROPRISMATIC 552 LED 36W Neutral	100, 150, 300	321	647	95	273	613	3348633
MICROPRISMATIC 552 LED 70W Warm	100, 150, 300	321	1256	95	273	1222	3348663
MICROPRISMATIC 552 LED 70W Neutral	100, 150, 300	321	1256	95	273	1222	3348673
MICROPRISMATIC 552 LED 86W Warm	100, 150, 300	321	1556	95	273	1522	3348703
MICROPRISMATIC 552 LED 86W Neutral	100, 150, 300	321	1556	95	273	1522	3348713

MICROPRISMATIC 562 LED 36W Warm	100, 200	238	647	95	190	613	3445623
MICROPRISMATIC 562 LED 36W Neutral	100, 200	238	647	95	190	613	3445633
MICROPRISMATIC 562 LED 70W Warm	100, 200	238	1256	95	190	1222	3445663
MICROPRISMATIC 562 LED 70W Neutral	100, 200	238	1256	95	190	1222	3445673
MICROPRISMATIC 562 LED 86W Warm	100, 200	238	1556	95	190	1522	3445703
MICROPRISMATIC 562 LED 86W Neutral	100, 200	238	1556	95	190	1522	3445713

For dimmer version add letter "D" at the end of product code.

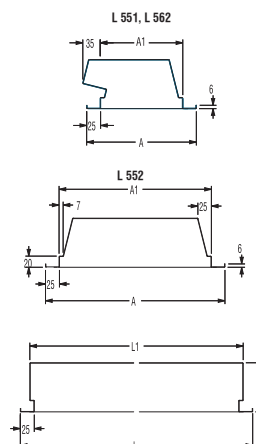


L 550 - 560

PROFESSIONAL RECESSED LUMINAIRES


L550 - 560 LSP0 LED IP54




LSP0 551




LSP0 552



LSP0 562



- Steel body.
- High efficient satin PMMA cover.
- Frame made of white painted steel, with steel springs for adjusting the cover to the body of the luminaire.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

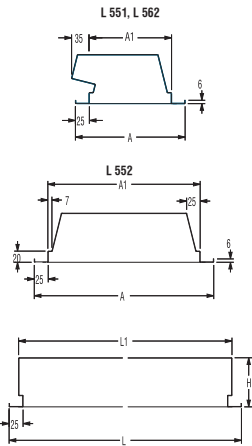

Description (High Efficiency 250mA)	Staves pitch width	Dimensions					Code
		A	L	H	A1	L1	
LSP0 551 LED 14W IP54 Warm	150	196	647	95	148	613	5878403
LSP0 551 LED 14W IP54 Neutral	150	196	647	95	148	613	5878413
LSP0 551 LED 25W IP54 Warm	150	196	1256	95	148	1222	5878443
LSP0 551 LED 25W IP54 Neutral	150	196	1256	95	148	1222	5878453
LSP0 551 LED 31W IP54 Warm	150	196	1556	95	148	1522	5878483
LSP0 551 LED 31W IP54 Neutral	150	196	1556	95	148	1522	5878493
LSP0 552 LED 25W IP54 Warm	100, 150, 300	321	647	95	273	613	5878603
LSP0 552 LED 25W IP54 Neutral	100, 150, 300	321	647	95	273	613	5878613
LSP0 552 LED 49W IP54 Warm	100, 150, 300	321	1256	95	273	1222	5878643
LSP0 552 LED 49W IP54 Neutral	100, 150, 300	321	1256	95	273	1222	5878653
LSP0 552 LED 60W IP54 Warm	100, 150, 300	321	1556	95	273	1522	5878683
LSP0 552 LED 60W IP54 Neutral	100, 150, 300	321	1556	95	273	1522	5878693
LSP0 562 LED 25W IP54 Warm	100, 200	238	647	95	190	613	5885603
LSP0 562 LED 25W IP54 Neutral	100, 200	238	647	95	190	613	5885613
LSP0 562 LED 49W IP54 Warm	100, 200	238	1256	95	190	1222	5885643
LSP0 562 LED 49W IP54 Neutral	100, 200	238	1256	95	190	1222	5885653
LSP0 562 LED 60W IP54 Warm	100, 200	238	1556	95	190	1522	5885683
LSP0 562 LED 60W IP54 Neutral	100, 200	238	1556	95	190	1522	5885693
Description (High Output 350mA)	Staves pitch width	Dimensions					Code
		A	L	H	A1	L1	
LSP0 551 LED 19W IP54 Warm	150	196	647	95	148	613	5878423
LSP0 551 LED 19W IP54 Neutral	150	196	647	95	148	613	5878433
LSP0 551 LED 36W IP54 Warm	150	196	1256	95	148	1222	5878463
LSP0 551 LED 36W IP54 Neutral	150	196	1256	95	148	1222	5878473
LSP0 551 LED 44W IP54 Warm	150	196	1556	95	148	1522	5878503
LSP0 551 LED 44W IP54 Neutral	150	196	1556	95	148	1522	5878513
LSP0 552 LED 36W IP54 Warm	100, 150, 300	321	647	95	273	613	5878623
LSP0 552 LED 36W IP54 Neutral	100, 150, 300	321	647	95	273	613	5878633
LSP0 552 LED 70W IP54 Warm	100, 150, 300	321	1256	95	273	1222	5878663
LSP0 552 LED 70W IP54 Neutral	100, 150, 300	321	1256	95	273	1222	5878673
LSP0 552 LED 86W IP54 Warm	100, 150, 300	321	1556	95	273	1522	5878703
LSP0 552 LED 86W IP54 Neutral	100, 150, 300	321	1556	95	273	1522	5878713
LSP0 562 LED 36W IP54 Warm	100, 200	238	647	95	190	613	5885623
LSP0 562 LED 36W IP54 Neutral	100, 200	238	647	95	190	613	5885633
LSP0 562 LED 70W IP54 Warm	100, 200	238	1256	95	190	1222	5885663
LSP0 562 LED 70W IP54 Neutral	100, 200	238	1256	95	190	1222	5885673
LSP0 562 LED 86W IP54 Warm	100, 200	238	1556	95	190	1522	5885703
LSP0 562 LED 86W IP54 Neutral	100, 200	238	1556	95	190	1522	5885713

For dimmer version add letter “D” at the end of product code.


L 550 - 560

PROFESSIONAL RECESSED LUMINAIRES


L550 - 560 MICROPRISMATIC LED IP54




MICROPRISMATIC 551




MICROPRISMATIC 552



MICROPRISMATIC 562



- Steel body.
- High efficient microprismatic PMMA cover.
- Frame made of white painted steel, with steel springs for adjusting the cover to the body of the luminaire.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

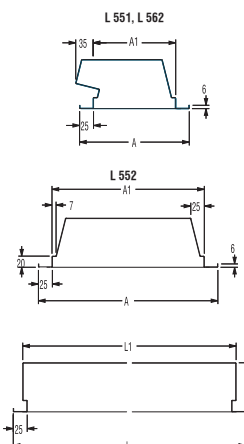


Description (High Efficiency 250mA)	Staves pitch width	Dimensions					Code
		A	L	H	A1	L1	
MICROPRISMATIC 551 LED 14W IP54 Warm	150	196	647	95	148	613	5838403
MICROPRISMATIC 551 LED 14W IP54 Neutral	150	196	647	95	148	613	5838413
MICROPRISMATIC 551 LED 25W IP54 Warm	150	196	1256	95	148	1222	5838443
MICROPRISMATIC 551 LED 25W IP54 Neutral	150	196	1256	95	148	1222	5838453
MICROPRISMATIC 551 LED 31W IP54 Warm	150	196	1556	95	148	1522	5838483
MICROPRISMATIC 551 LED 31W IP54 Neutral	150	196	1556	95	148	1522	5838493
MICROPRISMATIC 552 LED 25W IP54 Warm	100, 150, 300	321	647	95	273	613	5838603
MICROPRISMATIC 552 LED 25W IP54 Neutral	100, 150, 300	321	647	95	273	613	5838613
MICROPRISMATIC 552 LED 49W IP54 Warm	100, 150, 300	321	1256	95	273	1222	5838643
MICROPRISMATIC 552 LED 49W IP54 Neutral	100, 150, 300	321	1256	95	273	1222	5838653
MICROPRISMATIC 552 LED 60W IP54 Warm	100, 150, 300	321	1556	95	273	1522	5838683
MICROPRISMATIC 552 LED 60W IP54 Neutral	100, 150, 300	321	1556	95	273	1522	5838693
MICROPRISMATIC 562 LED 25W IP54 Warm	100, 200	238	647	95	190	613	5845603
MICROPRISMATIC 562 LED 25W IP54 Neutral	100, 200	238	647	95	190	613	5845613
MICROPRISMATIC 562 LED 49W IP54 Warm	100, 200	238	1256	95	190	1222	5845643
MICROPRISMATIC 562 LED 49W IP54 Neutral	100, 200	238	1256	95	190	1222	5845653
MICROPRISMATIC 562 LED 60W IP54 Warm	100, 200	238	1556	95	190	1522	5845683
MICROPRISMATIC 562 LED 60W IP54 Neutral	100, 200	238	1556	95	190	1522	5845693
Description (High Output 350mA)	Staves pitch width	Dimensions					Code
		A	L	H	A1	L1	
MICROPRISMATIC 551 LED 19W IP54 Warm	150	196	647	95	148	613	5838423
MICROPRISMATIC 551 LED 19W IP54 Neutral	150	196	647	95	148	613	5838433
MICROPRISMATIC 551 LED 36W IP54 Warm	150	196	1256	95	148	1222	5838463
MICROPRISMATIC 551 LED 36W IP54 Neutral	150	196	1256	95	148	1222	5838473
MICROPRISMATIC 551 LED 44W IP54 Warm	150	196	1556	95	148	1522	5838503
MICROPRISMATIC 551 LED 44W IP54 Neutral	150	196	1556	95	148	1522	5838513
MICROPRISMATIC 552 LED 36W IP54 Warm	100, 150, 300	321	647	95	273	613	5838623
MICROPRISMATIC 552 LED 36W IP54 Neutral	100, 150, 300	321	647	95	273	613	5838633
MICROPRISMATIC 552 LED 70W IP54 Warm	100, 150, 300	321	1256	95	273	1222	5838663
MICROPRISMATIC 552 LED 70W IP54 Neutral	100, 150, 300	321	1256	95	273	1222	5838673
MICROPRISMATIC 552 LED 86W IP54 Warm	100, 150, 300	321	1556	95	273	1522	5838703
MICROPRISMATIC 552 LED 86W IP54 Neutral	100, 150, 300	321	1556	95	273	1522	5838713
MICROPRISMATIC 562 LED 36W IP54 Warm	100, 200	238	647	95	190	613	5845623
MICROPRISMATIC 562 LED 36W IP54 Neutral	100, 200	238	647	95	190	613	5845633
MICROPRISMATIC 562 LED 70W IP54 Warm	100, 200	238	1256	95	190	1222	5845663
MICROPRISMATIC 562 LED 70W IP54 Neutral	100, 200	238	1256	95	190	1222	5845673
MICROPRISMATIC 562 LED 86W IP54 Warm	100, 200	238	1556	95	190	1522	5845703
MICROPRISMATIC 562 LED 86W IP54 Neutral	100, 200	238	1556	95	190	1522	5845713




For dimmer version add letter "D" at the end of product code.

L 550 - 560

L550 - 560 ACCESSORY - SUSPENSION BRACKETS

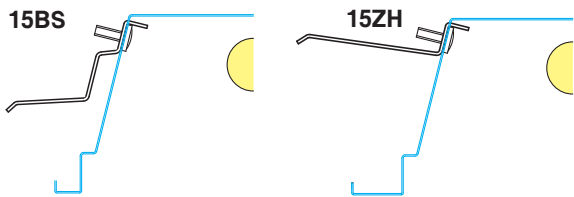

L 550 - 560 ACCESSORY - SUSPENSION BRACKETS



PROFESSIONAL RECESSED LUMINAIRES



- Suspension brackets from galvanized steel thickness 1,5mm, necessary for the installation in plasterboard or in staves pitch (width 100, 150, 200, 300mm) placed parallel to the luminaires.

Code	Description
303001	15 BS 15 BS min.18mm, max. 45mm (4 pieces) 0170
303005	15 ZH 15 ZH min.45mm, max. 72mm (4 pieces) 0177



- Suspension brackets from galvanized steel thickness 1,5mm, necessary for the installation of L550, L560 luminaires in staves pitch (width 100, 150, 200, 300mm), placed transverse to the luminaires.

Code	Description
303004	15 XB 15 XB min.20mm, max. 40mm A=55mm (4 pieces) 0176
303003	15 GF 15 GF min.40mm, max. 60mm A=60mm (4 pieces) 0175
303002	15 DP 15 DP min.60mm, max. 80mm A=55mm (4 pieces) 0174