


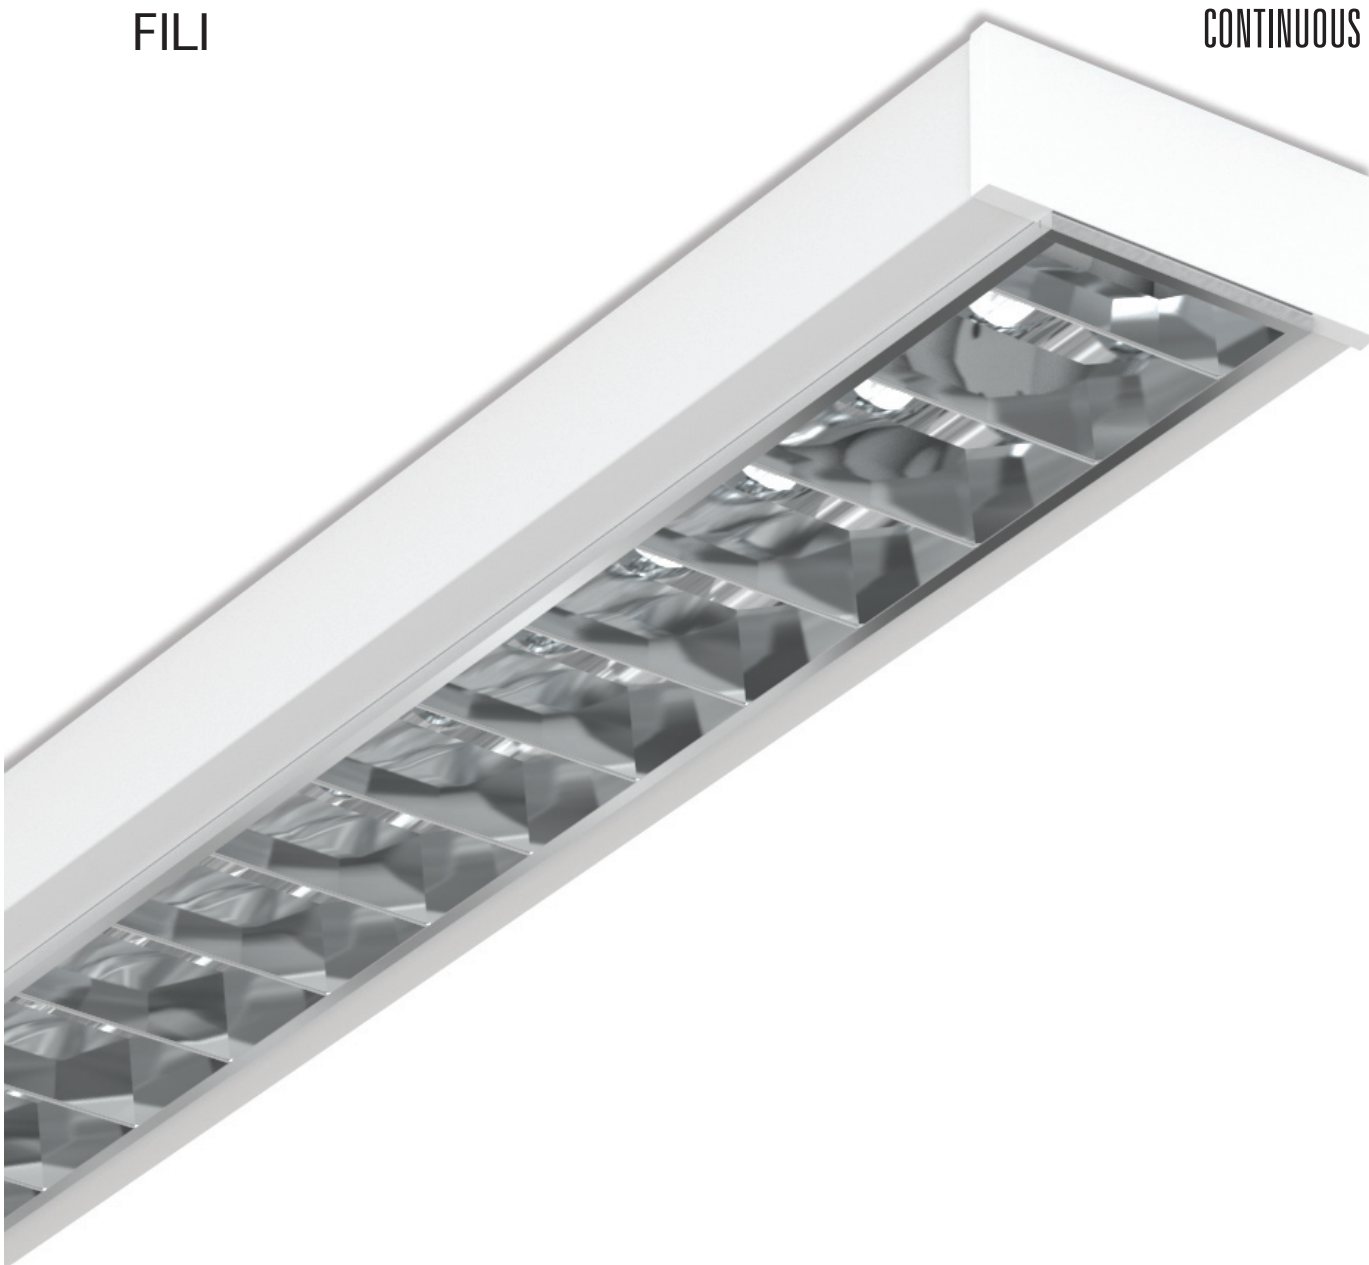

Technical Features

- Luminaires for LED CHIP.
- Body in hot-galvanized steel, electrostatically painted in white colour.
- Aluminium louvre with high efficient satin PMMA cover for louvre version.
- Flow recuperator RFMG parabolic, in specular non-iridescent aluminium with high efficient satin PMMA for reflector version.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V/50-60Hz.

Upon request:

- Available with highest colour rendering index (CRI).
- Connection for emergency lighting system, for one or three hours.


FILI

CONTINUOUS LUMINAIRES

FILI 180 P3M LED



- Steel body.
- Screen 3M with high efficient satin PMMA cover for led source.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

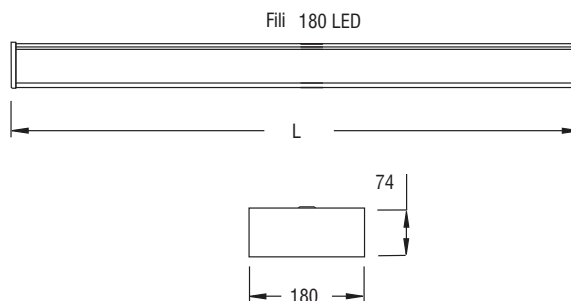


Code	Description (High Efficiency 250mA)	L
683503	P3M FILI 180 LED 14W Warm	600
683513	P3M FILI 180 LED 14W Neutral	600
683543	P3M FILI 180 LED 20W Warm	880
683553	P3M FILI 180 LED 20W Neutral	880
683583	P3M FILI 180 LED 25W Warm	1160
683593	P3M FILI 180 LED 25W Neutral	1160
683623	P3M FILI 180 LED 31W Warm	1440
683633	P3M FILI 180 LED 31W Neutral	1440


Code	Description (High Output 350mA)	L
683523	P3M FILI 180 LED 19W Warm	600
683533	P3M FILI 180 LED 19W Neutral	600
683563	P3M FILI 180 LED 27W Warm	880
683573	P3M FILI 180 LED 27W Neutral	880
683603	P3M FILI 180 LED 36W Warm	1160
683613	P3M FILI 180 LED 36W Neutral	1160
683643	P3M FILI 180 LED 44W Warm	1440
683653	P3M FILI 180 LED 44W Neutral	1440

For dimmer version add letter "D" at the end of product code.

FILI 180 RFMG LED



- Steel body.
- Flow recuperator RFMG parabolic, in specular non-iridescent aluminium.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

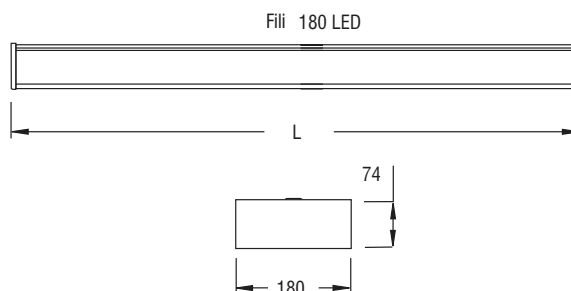

Code	Description (High Efficiency 250mA)	L
686503	RFMG FILI 180 LED 14W Warm	600
686513	RFMG FILI 180 LED 14W Neutral	600
686543	RFMG FILI 180 LED 20W Warm	880
686553	RFMG FILI 180 LED 20W Neutral	880
686583	RFMG FILI 180 LED 25W Warm	1160
686593	RFMG FILI 180 LED 25W Neutral	1160
686623	RFMG FILI 180 LED 31W Warm	1440
686633	RFMG FILI 180 LED 31W Neutral	1440



Code	Description (High Output 350mA)	L
686523	RFMG FILI 180 LED 19W Warm	600
686533	RFMG FILI 180 LED 19W Neutral	600
686563	RFMG FILI 180 LED 27W Warm	880
686573	RFMG FILI 180 LED 27W Neutral	880
686603	RFMG FILI 180 LED 36W Warm	1160
686613	RFMG FILI 180 LED 36W Neutral	1160
686643	RFMG FILI 180 LED 44W Warm	1440
686653	RFMG FILI 180 LED 44W Neutral	1440

For dimmer version add letter "D" at the end of product code.

FILI

CONTINUOUS LUMINAIRES

FILI 220 P3M LED

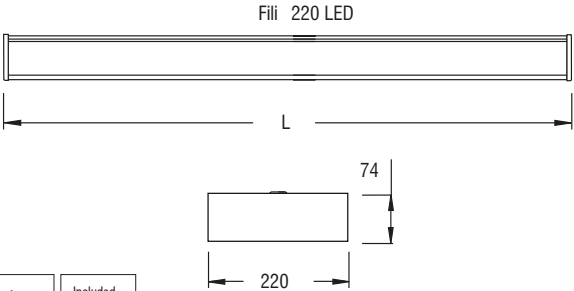


- Steel body.
- Screen 3M with high efficient satin PMMA cover for led source.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

Code	Description (High Efficiency 250mA)	L
693703	P3M FILI 220 LED 25W Warm	600
693713	P3M FILI 220 LED 25W Neutral	600
693743	P3M FILI 220 LED 37W Warm	880
693753	P3M FILI 220 LED 37W Neutral	880
693783	P3M FILI 220 LED 49W Warm	1160
693793	P3M FILI 220 LED 49W Neutral	1160
693823	P3M FILI 220 LED 60W Warm	1440
693833	P3M FILI 220 LED 60W Neutral	1440

Code	Description (High Output 350mA)	L
693723	P3M FILI 220 LED 36W Warm	600
693733	P3M FILI 220 LED 36W Neutral	600
693763	P3M FILI 220 LED 53W Warm	880
693773	P3M FILI 220 LED 53W Neutral	880
693803	P3M FILI 220 LED 70W Warm	1160
693813	P3M FILI 220 LED 70W Neutral	1160
693843	P3M FILI 220 LED 86W Warm	1440
693853	P3M FILI 220 LED 86W Neutral	1440

For dimmer version add letter “D” at the end of product code.

FILI 220 RFMG LED

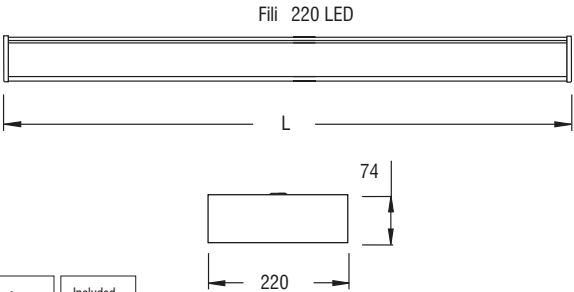

- Steel body.
- Flow recuperator RFMG parabolic, in specular non-iridescent aluminium.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

Code	Description (High Efficiency 250mA)	L
696703	RFMG FILI 220 LED 25W Warm	600
696713	RFMG FILI 220 LED 25W Neutral	600
696743	RFMG FILI 220 LED 37W Warm	880
696753	RFMG FILI 220 LED 37W Neutral	880
696783	RFMG FILI 220 LED 49W Warm	1160
696793	RFMG FILI 220 LED 49W Neutral	1160
696823	RFMG FILI 220 LED 60W Warm	1440
696833	RFMG FILI 220 LED 60W Neutral	1440

Code	Description (High Output 350mA)	L
696723	RFMG FILI 220 LED 36W Warm	600
696733	RFMG FILI 220 LED 36W Neutral	600
696763	RFMG FILI 220 LED 53W Warm	880
696773	RFMG FILI 220 LED 53W Neutral	880
696803	RFMG FILI 220 LED 70W Warm	1160
696813	RFMG FILI 220 LED 70W Neutral	1160
696843	RFMG FILI 220 LED 86W Warm	1440
696853	RFMG FILI 220 LED 86W Neutral	1440

For dimmer version add letter “D” at the end of product code.

FILI

CONTINUOUS LUMINAIRES

FILI ACCESSORY - CONNECTOR



- Connector for continuous lighting systems, made of white plastic with high thermal resistance. It ensures the perfect fit of the FILI structures.

Code	Description
608003	For lum. Fili 180
608004	For lum. Fili 220


FILI ACCESSORY - END CAP



- Removable **end cap**, made of white painted steel, to form continuous lighting systems

Code	Description
608001	For lum. Fili 180
608002	For lum. Fili 220

DOUBLE ADJUSTABLE SUSPENSION



- Stainless steel cable and regulators.
- **Required:**
2 pieces per luminaire.

Code	Description	L	Kg
900142	Double Suspension	1000	0,070
900143	Double Suspension	1500	0,110
900144	Double Suspension	2000	0,220

POWER SUPPLY




- Plastic body.
- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.

Code	Description	L	Kg
900122	Power Supply 3x0,75mm ² with Rosette Ø75	1000	0,120
900124	Power Supply 3x0,75mm ² with Rosette Ø75	2000	0,240
900126	Power Supply 3x0,75mm ² with Rosette Ø75	3000	0,360
900127	Power Supply 3x0,75mm ² with Rosette Ø75	4000	0,500
900162	Power Supply 5x0,50mm ² with Rosette Ø75	1000	0,120
900164	Power Supply 5x0,50mm ² with Rosette Ø75	2000	0,240
900166	Power Supply 5x0,50mm ² with Rosette Ø75	3000	0,360
900167	Power Supply 5x0,50mm ² with Rosette Ø75	4000	0,500



- For pendant use.
- Body from aluminium profile.
- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.
- Square or round version.

Code	Description	Kg
90042	Power Supply 3x0,75mm ² L 2m Ø80	0,130
90043	Power Supply 3x0,75mm ² L 2m Ø70	0,130
90044	Power Supply 3x0,75mm ² L 2m 80x80	0,210
90045	Power Supply 3x0,75mm ² L 2m 70x70	0,200
90048	Power Supply 5x0,50mm ² L 2m Ø100	0,250
90049	Power Supply 5x0,50mm ² L 2m 100x100	0,300

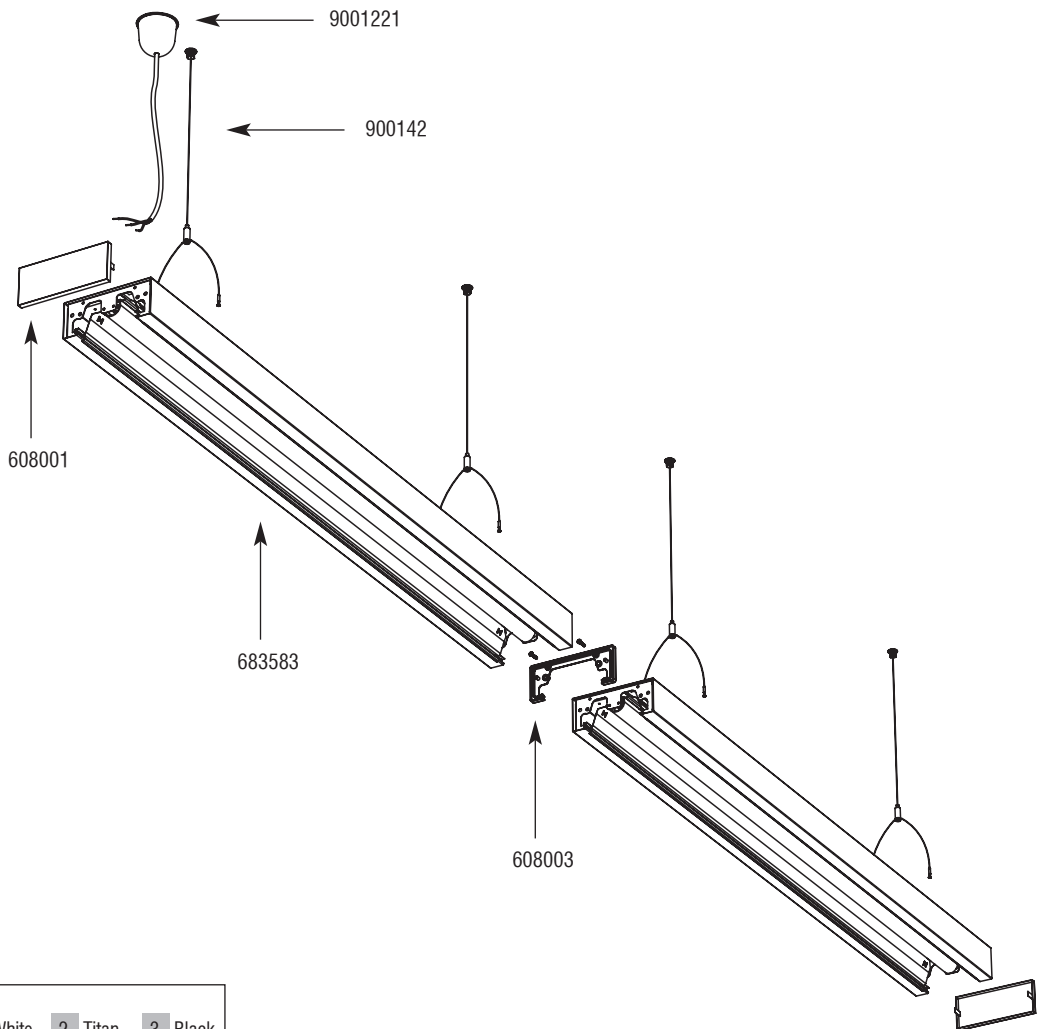

Colour Codes:

0 Colours 1 White 2 Titan 3 Black

