


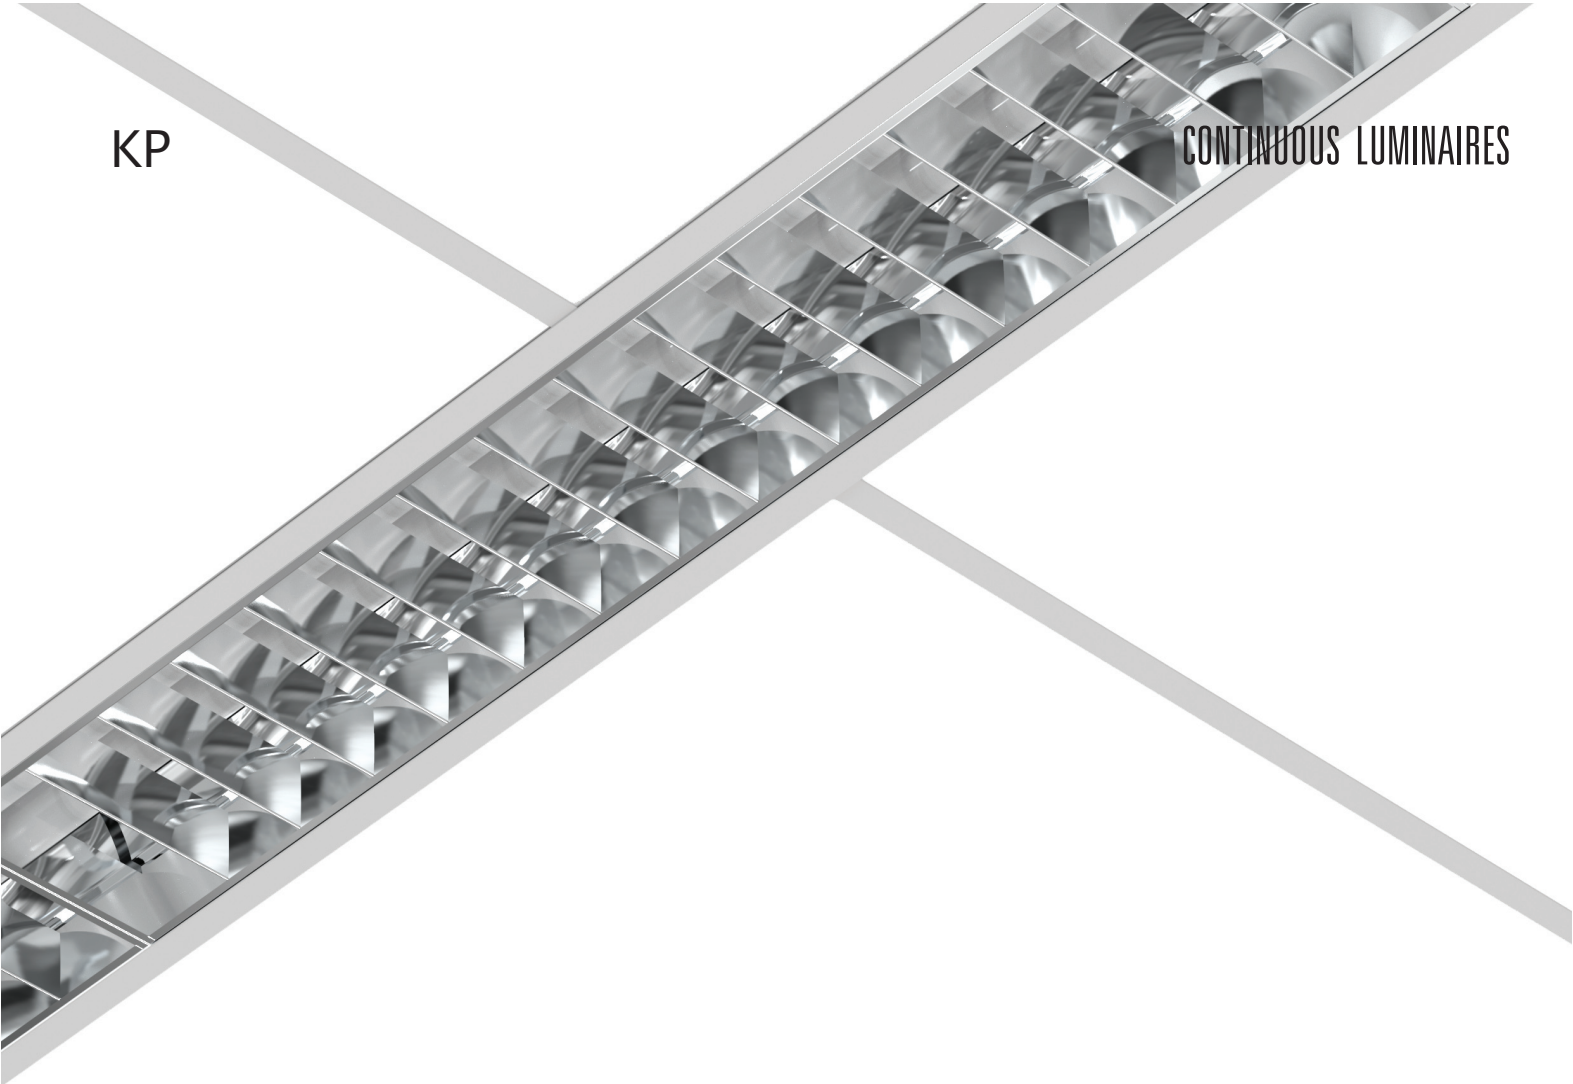

KP

CONTINUOUS LUMINAIRES

Technical Features

- Luminaires for LED CHIP.
- Recessed luminaires for armstrong ceiling.
- Steel body, electrostatically painted in white colour.
- Aluminium louvre with high efficient satin PMMA cover for louvre version.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V/50-60Hz.


Upon request:

- Available with highest colour rendering index (CRI).
- Connection for emergency lighting system, for one or three hours.

KP

CONTINUOUS LUMINAIRES

KP 221 P3M LED

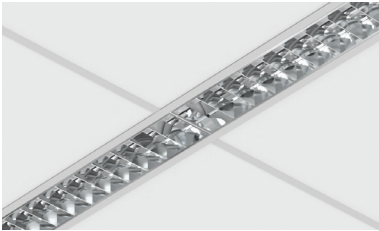


- Steel body.
- Screen 3M with high efficient satin PMMA cover for led source.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

Code	Description (High Efficiency 250mA)	L
612413	KP 221 P3M LED 14W Warm	600
612423	KP 221 P3M LED 14W Neutral	600
612453	KP 221 P3M LED 20W Warm	880
612463	KP 221 P3M LED 20W Neutral	880
612493	KP 221 P3M LED 25W Warm	1160
612503	KP 221 P3M LED 25W Neutral	1160
612533	KP 221 P3M LED 31W Warm	1440
612543	KP 221 P3M LED 31W Neutral	1440

Code	Description (High Output 350mA)	L
612433	KP 221 P3M LED 19W Warm	600
612443	KP 221 P3M LED 19W Neutral	600
612473	KP 221 P3M LED 27W Warm	880
612483	KP 221 P3M LED 27W Neutral	880
612513	KP 221 P3M LED 36W Warm	1160
612523	KP 221 P3M LED 36W Neutral	1160
612553	KP 221 P3M LED 44W Warm	1440
612563	KP 221 P3M LED 44W Neutral	1440

For dimmer version add letter “D” at the end of product code.

KP 242 P3M LED


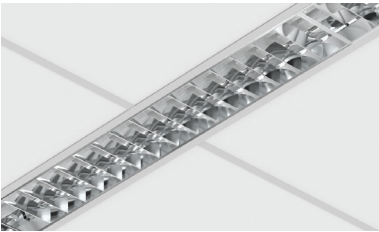


- Steel body.
- Screen 3M with high efficient satin PMMA cover for led source.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

Code	Description (High Efficiency 250mA)	L
622573	KP 242 P3M LED 25W Warm	600
622583	KP 242 P3M LED 25W Neutral	600
622613	KP 242 P3M LED 37W Warm	880
622623	KP 242 P3M LED 37W Neutral	880
622653	KP 242 P3M LED 49W Warm	1160
622663	KP 242 P3M LED 49W Neutral	1160
622693	KP 242 P3M LED 60W Warm	1440
622703	KP 242 P3M LED 60W Neutral	1440

Code	Description (High Output 350mA)	L
622593	KP 242 P3M LED 36W Warm	600
622603	KP 242 P3M LED 36W Neutral	600
622633	KP 242 P3M LED 53W Warm	880
622643	KP 242 P3M LED 53W Neutral	880
622673	KP 242 P3M LED 70W Warm	1160
622683	KP 242 P3M LED 70W Neutral	1160
622713	KP 242 P3M LED 86W Warm	1440
622723	KP 242 P3M LED 86W Neutral	1440


For dimmer version add letter “D” at the end of product code.

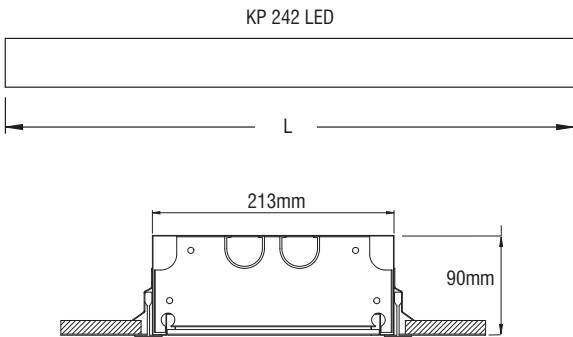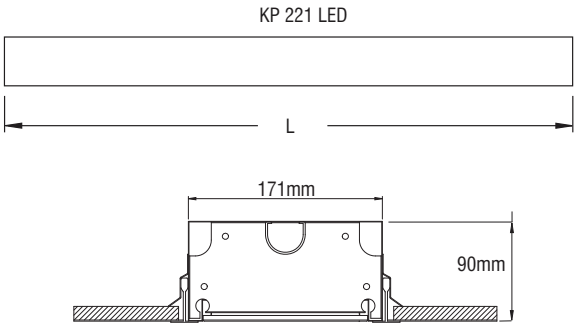

KP


CONTINUOUS LUMINAIRES

KP 222 P3M LED

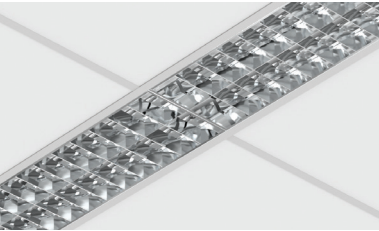

- Steel body.
- Screen 3M with high efficient satin PMMA cover for led source.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High Efficiency - 206 Lm/Watt 4000K
195 Lm/Watt 3000K
High Output - 201 Lm/Watt 4000K
189 Lm/Watt 3000K

Code	Description (High Efficiency 250mA)	L
612573	KP 222 P3M LED 25W Warm	600
612583	KP 222 P3M LED 25W Neutral	600
612613	KP 222 P3M LED 37W Warm	880
612623	KP 222 P3M LED 37W Neutral	880
612653	KP 222 P3M LED 49W Warm	1160
612663	KP 222 P3M LED 49W Neutral	1160
612693	KP 222 P3M LED 60W Warm	1440
612703	KP 222 P3M LED 60W Neutral	1440

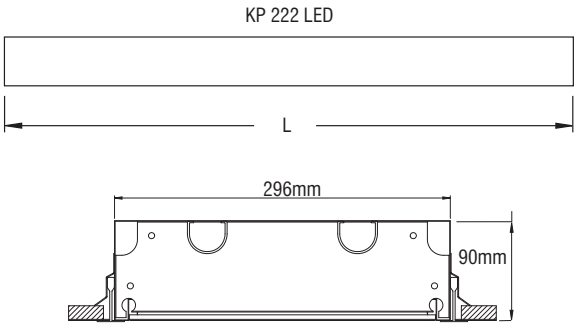

Code	Description (High Output 350mA)	L
612593	KP 222 P3M LED 36W Warm	600
612603	KP 222 P3M LED 36W Neutral	600
612633	KP 222 P3M LED 53W Warm	880
612643	KP 222 P3M LED 53W Neutral	880
612673	KP 222 P3M LED 70W Warm	1160
612683	KP 222 P3M LED 70W Neutral	1160
612713	KP 222 P3M LED 86W Warm	1440
612723	KP 222 P3M LED 86W Neutral	1440

For dimmer version add letter “D” at the end of product code.