



Technical Features

- Floodlight composed of four or five Led sources.
- Body and cover in die cast aluminium.
- Led COB technology (Chip On Board) placed on an highly thermal heat - dissipating plate.
- Cable plate complite with easy replaceable electronic unit.
- The power supply cable accesses the device through a PG16 cable glande (IP68).
- Opening provides access to reflectors and cable box in a single, easy step by using two solid stainless screws.
- Insulation class I.
- Overall protection degree IP66.

Upon Request


- Connection for operation on 230V-50/60Hz with dimmer dali or 1-10VDC ballast.




To ensure the degree of protection (sealing), the use of flexible power supply cable type H07RN-F (in appropriate diameter) is required.

COSMO 4/5

COSMO 4

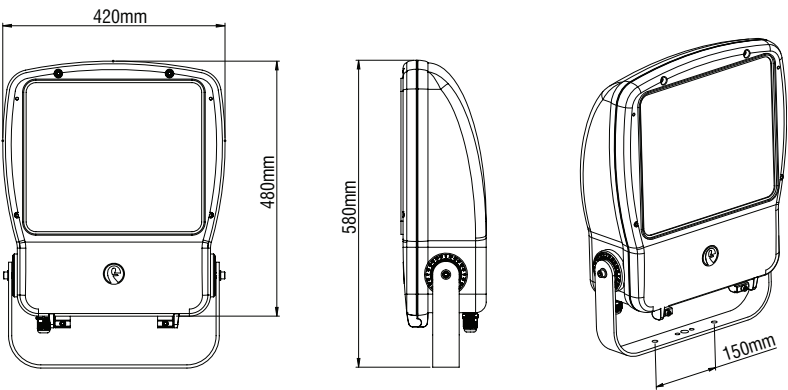

COSMO 5

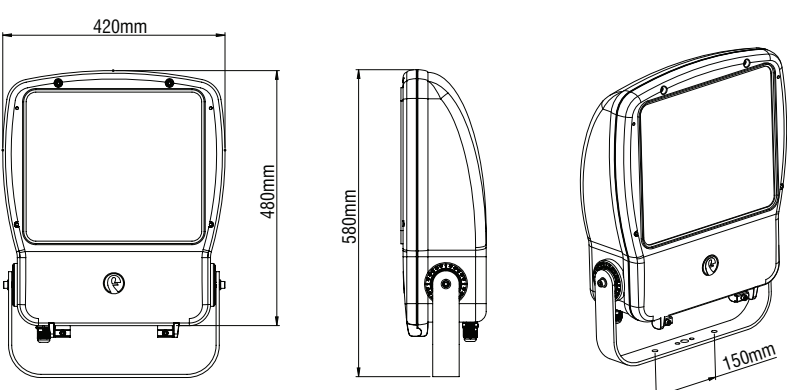

LED COLOUR CODES:		
1	Cool	2 Warm
3	Neutral	

BEAM CODES:		
01	spot	02 medium
03	wide	

Colour Codes:		
1	White	2 Titan
3	Black	

LUMINAIRES WITH EXTRA PROTECTION

CE	F	⏏	IP 66	850° C	IK 08	LED
5 YEARS WARRANTY	ta 25°C	Included				

- Beams: Spot, Medium, Wide.
- Aluminium body.
- Tempered protection glass.
- Luminous Efficacy:
 - 160W: 5000 K: 171 Lm/W, CRI: min. 80
 - 160W: 4000 K: 170 Lm/W, CRI: min. 80
 - 160W: 3000 K: 162 Lm/W, CRI: min. 80

Code	Description
71703	COSMO 4 LED 160W

For dimmer version add letter “D” at the end of product code.

CE	F	⏏	IP 66	850° C	IK 08	LED
5 YEARS WARRANTY	ta 25°C	Included				

- Beams: Spot, Medium, Wide.
- Aluminium body.
- Tempered protection glass.
- Luminous Efficacy:
 - 180W: 5000 K: 178 Lm/W, CRI: min. 80
 - 180W: 4000 K: 177 Lm/W, CRI: min. 80
 - 180W: 3000 K: 168 Lm/W, CRI: min. 80

Code	Description
71704	COSMO 5 LED 180W

For dimmer version add letter “D” at the end of product code.