



*A linear suspended luminaire with impressive design.
This luminaire is ideal for applications
where diffuse direct – indirect lighting is needed.*

Technical Features


- Body of aluminum profile, painted electrostatically in selected colour.
- Side aluminium foil, painted electrostatically in selected colour, or mirror selection.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Adjustable suspension consisting of stainless steel cable and regulators.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V-50/60Hz.

Upon Request

- Available with highest colour rendering index (CRI).

BINARIO

BINARIO

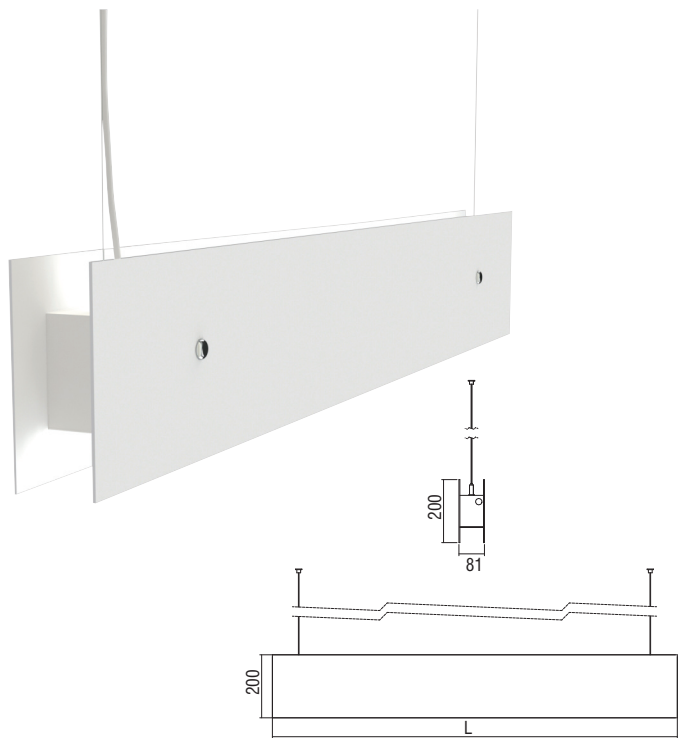

Colour Codes:			
0	Colours	1	White
2	Titan		

PROFESSIONAL SURFACE & PENDANT LUMINAIRES




- Side aluminium foil.
- High efficient diffuser in opal PMMA.
- Suspension and power supply 2m included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
95131	Binario LED Up /Down 33W+16W Neutral	1285	6,600
95130	Binario LED Up /Down 33W+16W Warm	1285	6,600
95133	Binario LED Up /Down 40W+24W Neutral	1585	8,200
95132	Binario LED Up /Down 40W+24W Warm	1585	8,200

For dimmer version add letter “D” at the end of product code.

BINARIO MIRROR

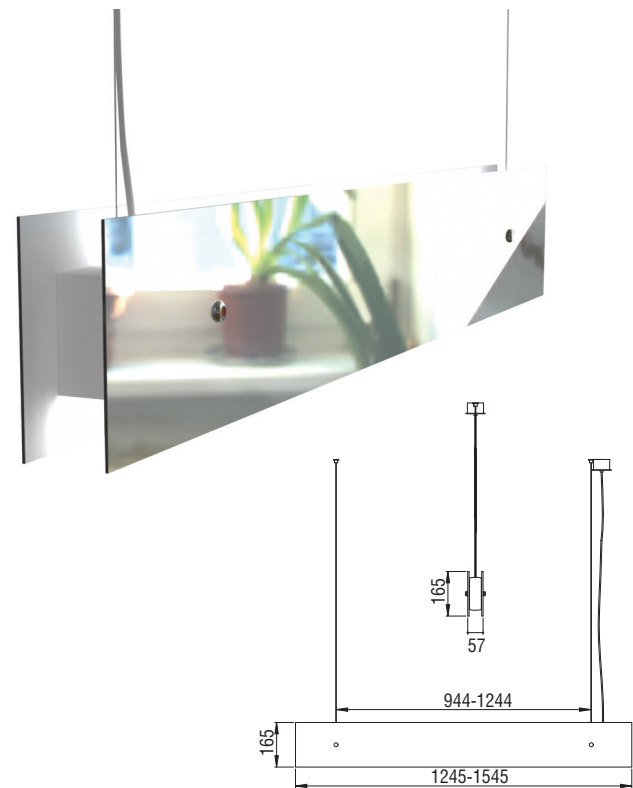

- Mirror side.
- Inner body, made from aluminium, painted electrostatically in white colour.
- High efficient diffuser in opal PMMA.
- Suspension and power supply 2m included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/Watt at 4000K 300mA
192 Lm/Watt at 3000K 300mA

Code	Description	L	Kg
951350	Binario Mirror LED Up /Down 32W+24W Neutral	1245	9,800
951340	Binario Mirror LED Up /Down 32W+24W Warm	1245	9,800
951370	Binario Mirror LED Up /Down 40W+32W Neutral	1545	12,650
951360	Binario Mirror LED Up /Down 40W+32W Warm	1545	12,650

For dimmer version add letter “D” at the end of product code.