

# ANDROS

# PROFESSIONAL RECESSED LUMINAIRES

*The ANDROS recessed-mounted luminaire with its opal cover provides perfect lighting comfort and glare-free lighting. The luminaire unit impresses with its design and unique uniform.*

### **Technical Features**


- Recessed luminaire for panels in mineral fibre with expose structure.
- Steel body with flat form, electrostatically painted in white colour.
- High efficient satin PMMA microprismatic cover.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 70% of the initial luminous flux (L70B50).
- Connection for operation on 230V-50/60Hz.

### **Upon Request**


- Connection for emergency lighting system, for one or three hours.

# ANDROS

## PROFESSIONAL RECESSED LUMINAIRES

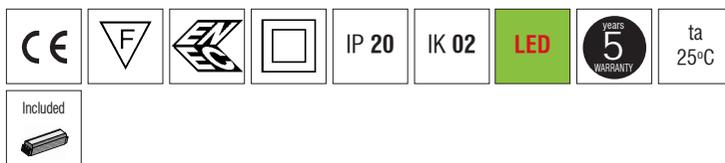

- High efficient satin PMMA microprismatic cover.
- For exposed structure.
- CRI: min 80.



Code	Description	Lumen (output)	SDCM	Dimensions
367031	Andros Led 33W 3000K	3660Lm	6	595x595x8,5
367041	Andros Led 33W 4000K	3660Lm	6	595x595x8,5
367051	Andros Led 33W 3000K	3660Lm	4	1195x295x8,5
367061	Andros Led 33W 4000K	3660Lm	4	1195x295x8,5

For dimmer version add letter "D" at the end of product code.

