

NIVEL


OUTDOOR



*Floor mounted luminaire,
with plain and accurate design,
for outdoor applications.*

Technical Features

- Brass body.
- PMMA cover.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Supplied with 2x0,75mm NEOPRENE 0,5m cable.




Note: For the proper installation of the fitting an effective drainage as well as a 20-30cm deep layer of gravel must be intended for dewatering.

NIVEL



OUTDOOR

NIVEL 40

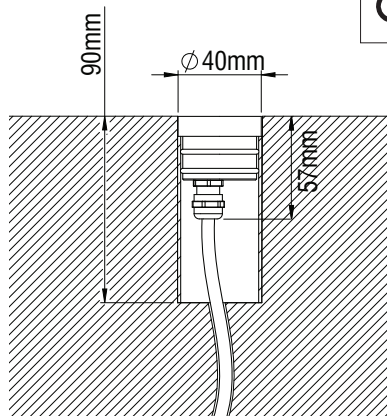


- Brass body.
- Connection for operation 24V DC.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
2W: 3000 K: 100 Lm/Watt
2W: 4000 K: 107 Lm/Watt

Code	Description	Kg
842450	NIVEL 40 LED 2W 24V DC IP67 Warm	0,140
842460	NIVEL 40 LED 2W 24V DC IP67 Neutral	0,140

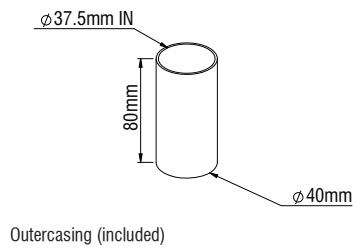



Outercasing (included)

NIVEL 63

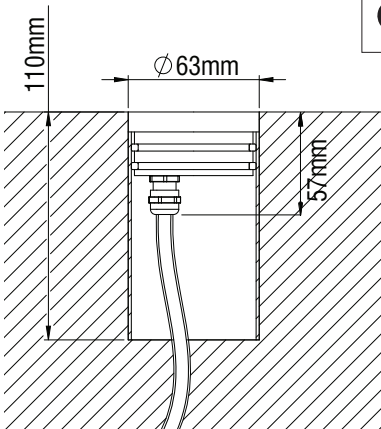

- Brass body.
- Connection for operation 24V DC.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
2W: 3000 K: 100 Lm/Watt
2W: 4000 K: 107 Lm/Watt

Code	Description	Kg
842430	NIVEL 63 LED 2W 24V DC IP67 Warm	0,340
842440	NIVEL 63 LED 2W 24V DC IP67 Neutral	0,340

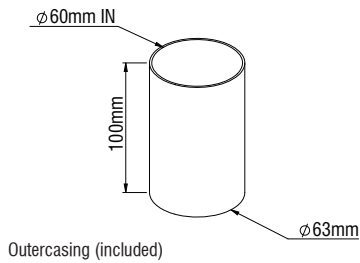

Outercasing (included)

DRIVERS

LED LUMAIRES DESCRIPTION	N° Luminaires		DIMENSIONS mm			CODE	
	min.	max.					
NIVEL 40 / NIVEL 63 (CONSTANT VOLTAGE)	1	1	24V DC	6W	IP20	52 x 43,5 x 21,5	800132
NIVEL 40 / NIVEL 63 (CONSTANT VOLTAGE)	1	3	24V DC	16W	IP42	90 x 40 x 29	800133
NIVEL 40 / NIVEL 63 (CONSTANT VOLTAGE)	1	10	24V DC	60W	IP20	180 x 52 x 30	800097