





DANAI is surface wall mounted luminaire with LED source, ideal for a wide range of indoor applications.

Technical Features

- Aluminium body, painted electrostatically in selected colour.
- Steel mounting base.
- Connection for operation with 230V/50Hz.

DANAI



DANAI 1

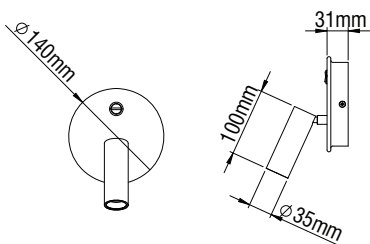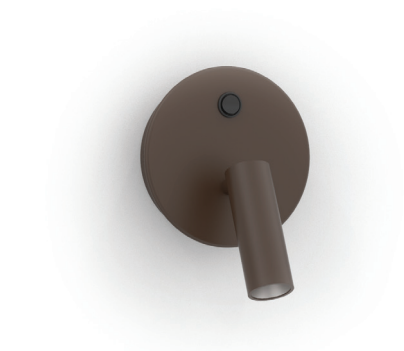

- Aluminium body.
- Steel mounting base.
- 2W power consumption driven at 700mA.
- 230V/50Hz.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
164 Lm/W at 4000 K
154 Lm/W at 3000 K

Code	Description	Kg
85916■	DANAI 1 2W Warm	0,350
85917■	DANAI 1 2W Neutral	0,350

DANAI 2

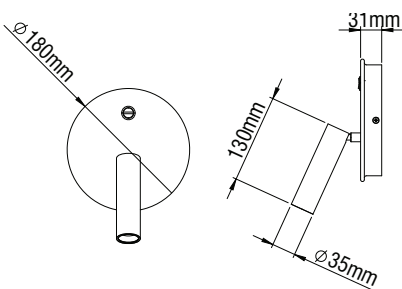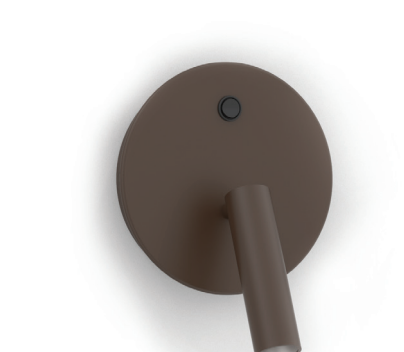

- Aluminium body.
- Steel mounting base.
- 2W power consumption driven at 700mA.
- 230V/50Hz.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
164 Lm/W at 4000 K
154 Lm/W at 3000 K

Code	Description	Kg
85918■	DANAI 2 2W Warm	0,400
85919■	DANAI 2 2W Neutral	0,400

Colour Codes:			
0	Colours	1	White
2	Titan	3	Black