



ISTOS with its elegance style and its high IP protection degree (IP65), present itself as an ideal solution for illuminating squares, parks, gardens etc.


Technical Features

- Body from aluminium profile, painted electrostatically in selected colour.
- Tempered protection glass 3mm.
- Pure light without IR/UV radiation.
- Led source with integrated led driver.
- Floor installation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).


Upon request:

Available with highest colour rendering index (CRI)


SPOT

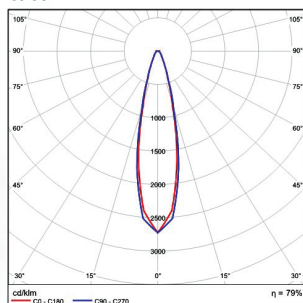

MEDIUM

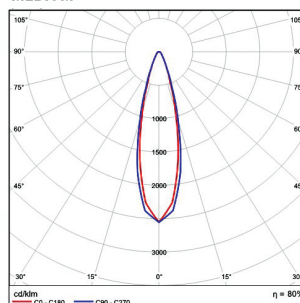


WIDE

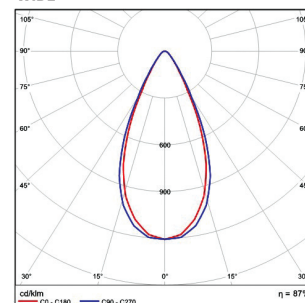

ISTOS

OUTDOOR

ISTOS 1

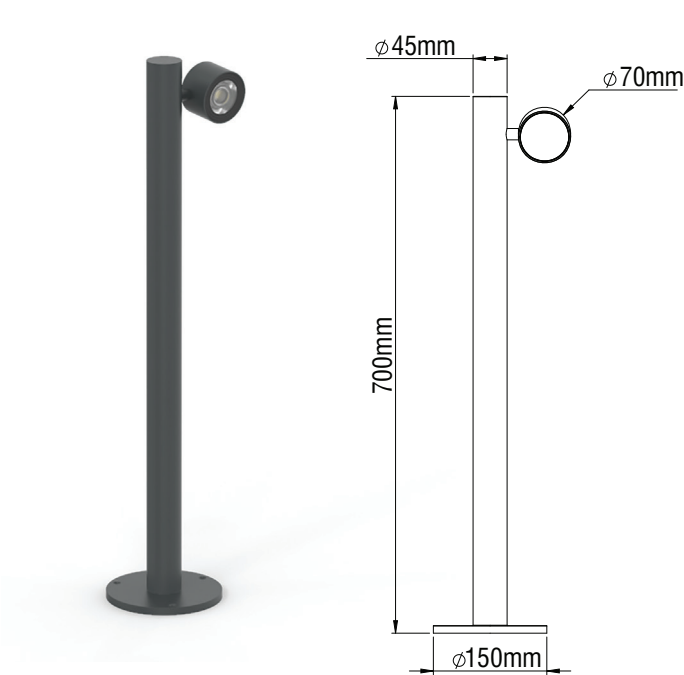

CE

F

IP 65

LED

5

YEARS


WARRANTY

ta
25°C

- Aluminium body.
- Beams: Spot, Medium, Wide.
- Dimmer Phase Cut.
- Power LED 230V AC/50Hz.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
4W: 4000 K: 122 Lm/Watt
4W: 3000 K: 115 Lm/Watt

Code	Description
84470	ISTOS 1 LED 4W IP65

ISTOS 2

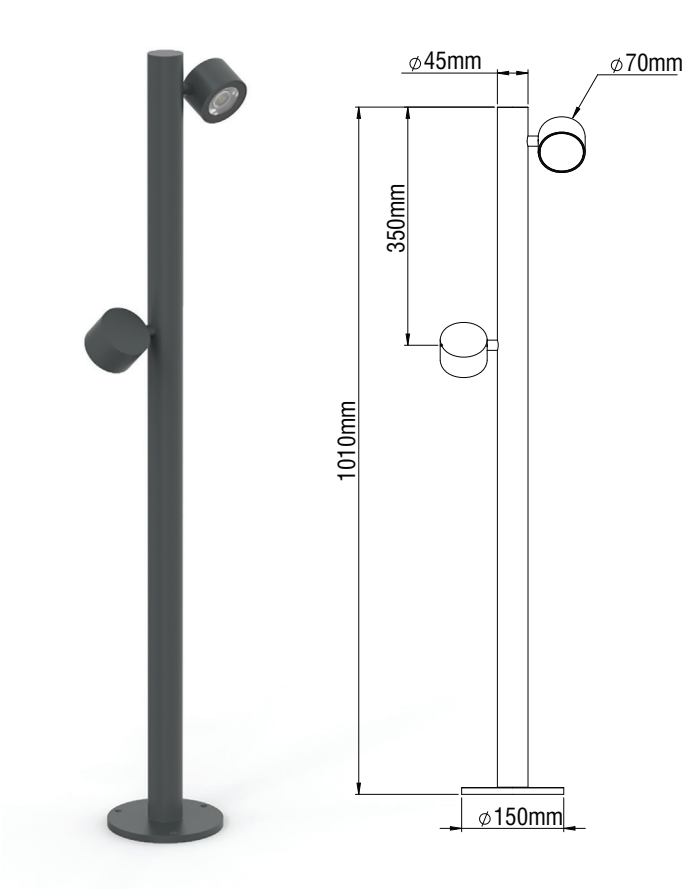

CE

F

IP 65

LED

5

YEARS

WARRANTY

ta
25°C

- Aluminium body.
- Beams: Spot, Medium, Wide.
- Dimmer Phase Cut.
- Power LED 230V AC/50Hz.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
4W + 4W: 4000 K: 122 Lm/Watt
4W + 4W: 3000 K: 115 Lm/Watt

Code	Description
84471	ISTOS 2 LED 4W + 4W IP65

LED COLOUR CODES:

1

Cool

2

Warm

3

Neutral

BEAM CODES:

01

spot

02

medium

03

wide

Colour Codes:

0

Colours

1

White

2

Titan

3

Black