DISCUS

ARCHITECTURAL SURFACE & PENDANT LUMINAIRES



An opal circular luminaire with a contemporary design.

DISCUS is a piece of architecture, perfect for adding stature to an area.

With it's gentle uniform lighting, it upgrades areas such as lobbies, corridors, offices, stores and homes.

Technical Features

- Aluminium body, painted electrostatically in selected colour.
- Version with opal plexi glass or microprismatic cover.
- Direct illumination.
- Pure light without IR/UV radiation.
- Efficient thermal management.

- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V-50/60Hz.

Upon Request

- Connection for emergency lighting system, for one or three hours (for some versions).

/ 592 / www.petridis-lighting.gr

DISCUS

ARCHITECTURAL SURFACE & PENDANT LUMINAIRES

DISCUS







- High efficient opal plexiglass cover.
- CRI: min. 80 / SDCM: 3

Code	Description		Dimensions mm \emptyset A
8261018	Discus 440 LED 35W Warm	Luminous Efficacy: 189 Lm/Watt at 350mA	440
8261028	Discus 440 LED 35W Neutral	Luminous Efficacy: 201 Lm/Watt at 350mA	440
8261038	Discus 610 LED 60W Warm	Luminous Efficacy: 191 Lm/Watt at 325mA	610
8261048	Discus 610 LED 60W Neutral	Luminous Efficacy: 202 Lm/Watt at 325mA	610
8261058	Discus 835 LED 98W Warm	Luminous Efficacy: 193 Lm/Watt at 275mA	835
8261068	Discus 835 LED 98W Neutral	Luminous Efficacy: 205 Lm/Watt at 275mA	835

For dimmer version add letter " \mathbf{D} " at the end of product code.





DISCUS MICROPRISMATIC







- High efficient microprismatic cover.
- CRI: min. 80 / SDCM: 3

Code	Description		Dimensions mm $\emptyset A$
8263018	Discus Microprismatic 440 LED 35W Warm	Luminous Efficacy: 189 Lm/Watt at 350mA	440
8263028	Discus Microprismatic 440 LED 35W Neutral	Luminous Efficacy: 201 Lm/Watt at 350mA	440
8263038	Discus Microprismatic 610 LED 60W Warm	Luminous Efficacy: 191 Lm/Watt at 325mA	610
8263048	Discus Microprismatic 610 LED 60W Neutral	Luminous Efficacy: 202 Lm/Watt at 325mA	610
8263058	Discus Microprismatic 835 LED 98W Warm	Luminous Efficacy: 193 Lm/Watt at 275mA	835
8263068	Discus Microprismatic 835 LED 98W Neutral	Luminous Efficacy: 205 Lm/Watt at 275mA	835

For dimmer version add letter " \mathbf{D} " at the end of product code.








www.petridis-lighting.gr / 593 /

ARCHITECTURAL SURFACE & PENDANT LUMINAIRES


DISCUS

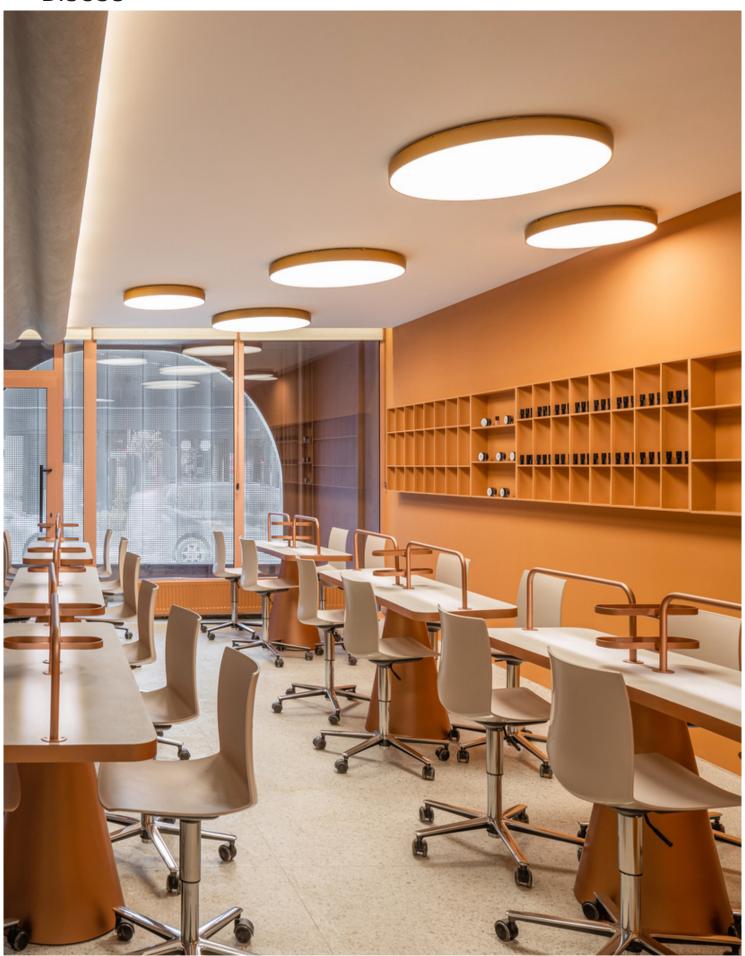

DISCUS


ARCHITECTURAL SURFACE & PENDANT LUMINAIRES

DISCUS Q





DISCUS Q MICROPRISMATIC





DISCUS PR





DISCUS PR MICROPRISMATIC







- High efficient opal plexiglass cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy (for 22W version): 126 Lm/W at 4000 K 120 Lm/W at 3000 K
- Luminous Efficacy (for 29W version): 203 Lm/W at 4000 K at 300mA 192 Lm/W at 3000 K at 300mA
- Luminous Efficacy (for 33W version): 189 Lm/W at 4000 K at 350mA 182 Lm/W at 3000 K at 350mA

Code	Description	Dimensions mm
832101	Discus Q LED 22W	295x295
832102	Discus Q LED 29W	390x390
832103	Discus Q LED 33W	640x640

For dimmer version add letter "D" at the end of product code.

















- High efficient opal plexiglass cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy (for 22W version): 126 Lm/W at 4000 K 120 Lm/W at 3000 K
- Luminous Efficacy (for 29W version): 203 Lm/W at 4000 K at 300mA 192 Lm/W at 3000 K at 300mA
- Luminous Efficacy (for 33W version): 189 Lm/W at 4000 K at 350mA 182 Lm/W at 3000 K at 350mA

Code	Description	Dimensions mm
832301■■	Discus Q Microprismatic LED 22W	295x295
832302	Discus Q Microprismatic LED 29W	390x390
832303	Discus Q Microprismatic LED 33W	640x640

For dimmer version add letter "D" at the end of product code.

















- High efficient opal plexiglass cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: 201 Lm/W at 4000 K at 350mA 189 Lm/W at 3000 K at 350mA

Code	Description	Dimensions mm
832104	Discus PR LED 25W	220x640
832105	Discus PR LED 25W	160x900

For dimmer version add letter "D" at the end of product code.

















- High efficient microprismatic cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: 201 Lm/W at 4000 K at 350mA 189 Lm/W at 3000 K at 350mA

Code	Description	Dimensions mm
832304	Discus PR Microprismatic LED 25W	220x640
832305■■	Discus PR Microprismatic LED 25W	160x900

For dimmer version add letter "D" at the end of product code.



www.petridis-lighting.gr / 595 /