


EASYLINE

PROFESSIONAL RECESSED LUMINAIRES

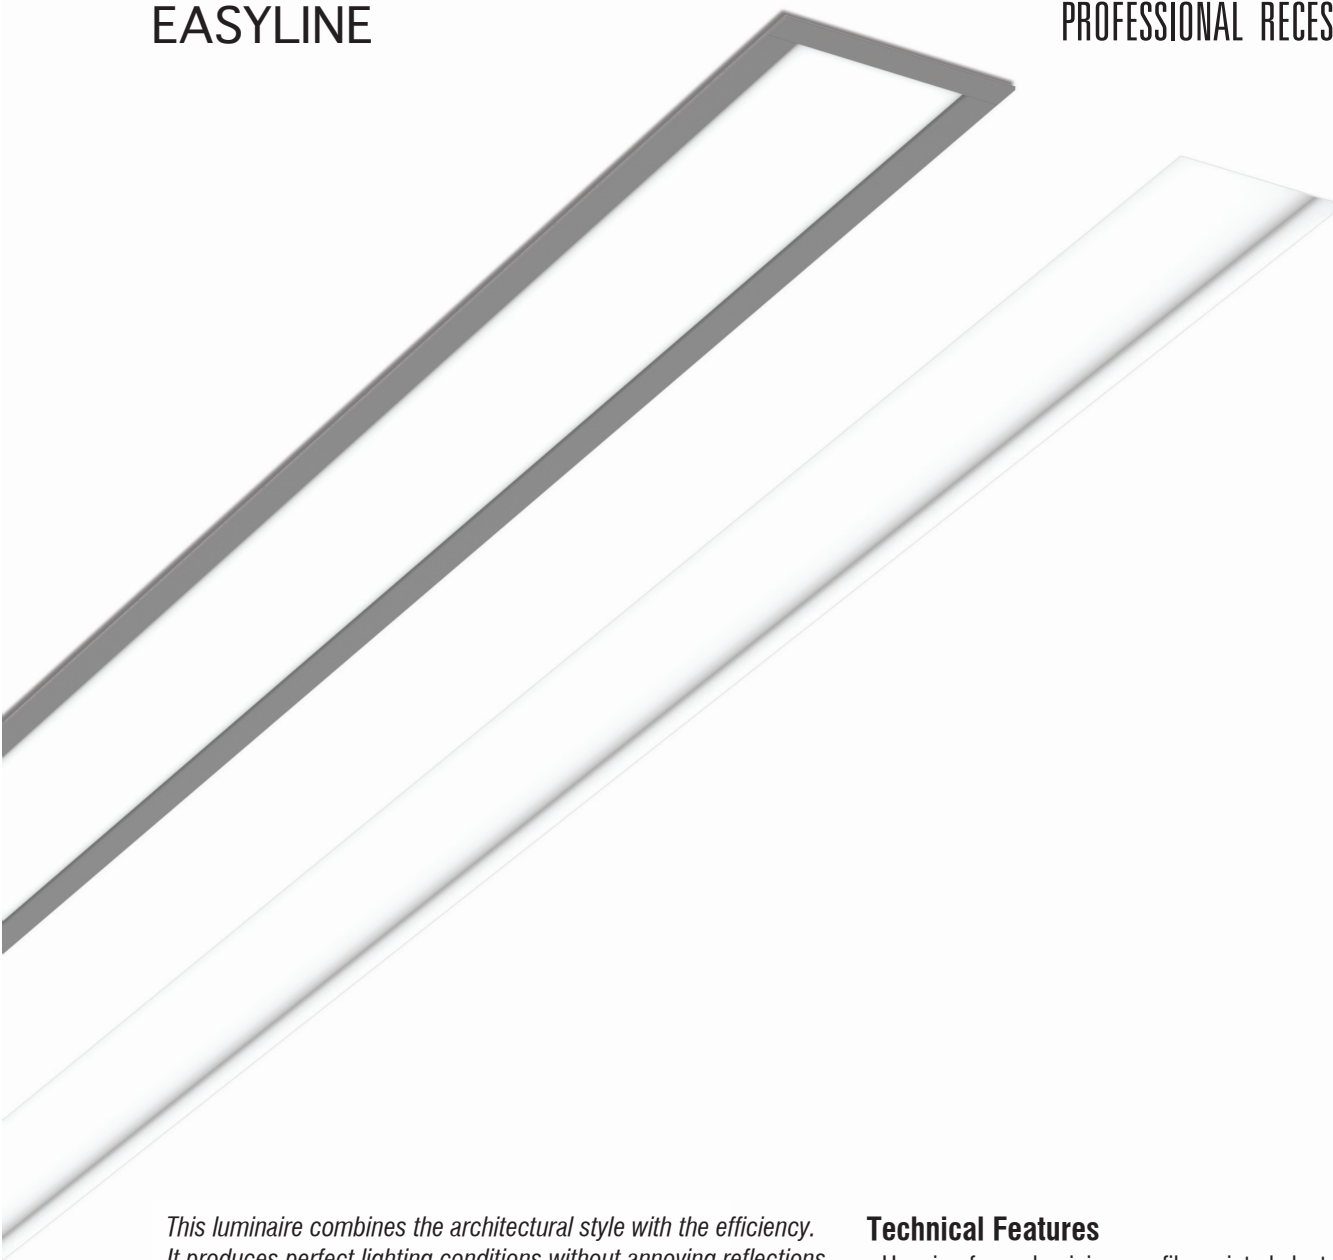

This luminaire combines the architectural style with the efficiency. It produces perfect lighting conditions without annoying reflections and that is why it can be used from entrance areas to offices. The visual benefit: The continuous-row system is illuminated absolutely uniformly from beginning to end, is economically efficient, is maintenance-free and it has long service life.

Technical Features

- Housing from aluminium profile, painted electrostatically in selected colour.
- PMMA diffuser in opal, microprismatic, microprismatic opal or anaglyph edition or blind aluminium cover painted.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Up to 28W/m and 5000 Lm luminous flux range.
- UGR < 19 at microprismatic and microprismatic opal versions:
Glare Evaluation: X=4H/ Y=8H S=0,25H, reflection factors 70/50/20.
For DSE work stations: $\gamma \geq 65^\circ$ < 3000cd/m².
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V/50Hz.


Upon request

- Connection for emergency lighting system, for one or three hours.
- Available with higher colour rendering index (CRI).
- Available in IP54 protection version.

EASYLINE

PROFESSIONAL RECESSED LUMINAIRES

Holes
67mm x (L+6mm for Trim)
82mm x (L+6mm for Trimless)

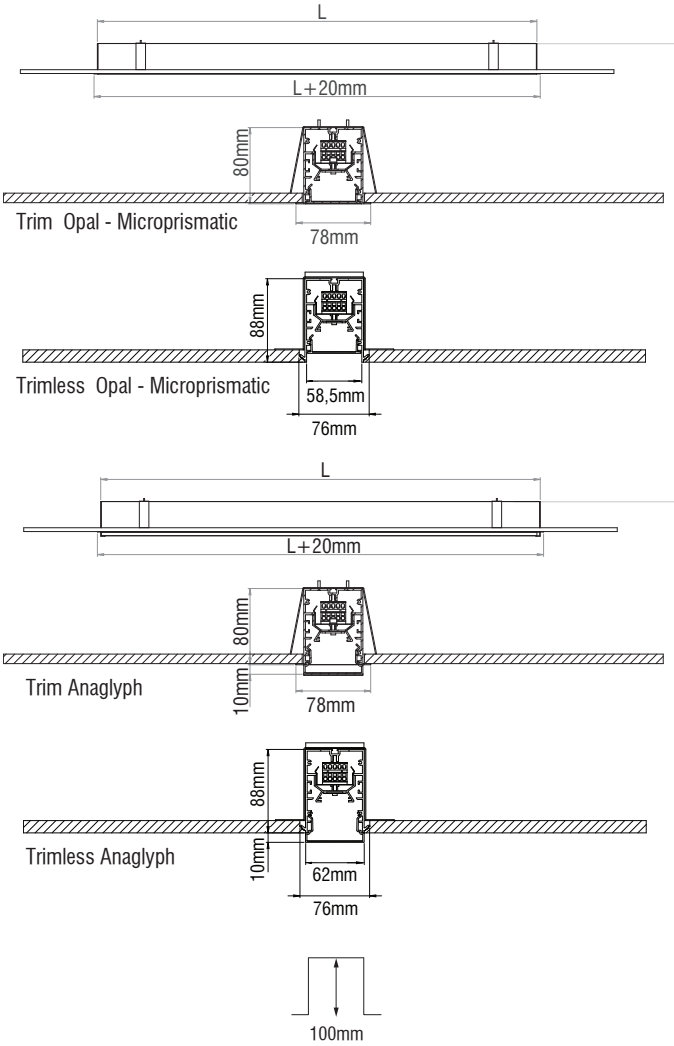


Length (for Trim):

01	L: meter (custom)	06	L: 1704mm
02	L: 584mm	07	L: 1984mm
03	L: 864mm	08	L: 2264mm
04	L: 1144mm	09	L: 2548mm
05	L: 1424mm	10	L: 2828mm

Length (for Trimless):


01	L: meter (custom)	06	L: 1720mm
02	L: 600mm	07	L: 2000mm
03	L: 900mm	08	L: 2280mm
04	L: 1160mm	09	L: 2564mm
05	L: 1440mm	10	L: 2844mm

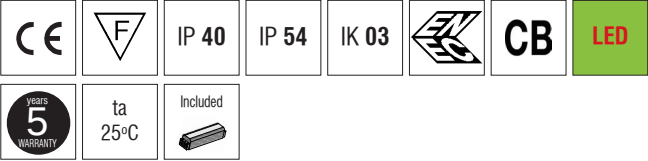


- Body from extruded aluminium profile.
- PMMA diffuser in opal, microprismatic, microprismatic opal or anaglyph edition for IP40 and IP54, or blind aluminium cover painted for IP40.
- Aluminium end cap.
- CRI: min. 80 / SDCM: 3

Code	Description	Kg
9932	Easyline Trunking Trim	1,800
9934	Easyline Trunking Trimless	2,000
9951	Easyline Cover Opal	0,250
9952	Easyline Cover Microprismatic	0,250
9958	Easyline Cover Microprismatic opal	0,250
9953	Easyline Cover Anaglyph	0,250
995401	Easyline Cover Aluminium Blind	0,250
9955	Easyline Cover Opal IP54	0,250
9956	Easyline Cover Microprismatic IP54	0,250
9959	Easyline Cover Microprismatic opal IP54	0,250
9957	Easyline Cover Anaglyph IP54	0,250
99612	Easyline End Cap (pair) Trim	0,050
99614	Easyline End Cap anaglyph (pair) Trim	0,050
99617	Easyline End Cap (pair) Trimless	0,050
99618	Easyline End Cap anaglyph (pair) Trimless	0,050


OPAL




MICROPRISMATIC



MICROPRISMATIC OPAL



ANAGLYPH



Colour Codes:

0	Colours	1	White	2	Titan	3	Black	9	Anod.
---	---------	---	-------	---	-------	---	-------	---	-------

EASYLINE


PROFESSIONAL RECESSED LUMINAIRES





EASYLINE


CORNER TRIM 120x120



TRUNKING CONNECTORS



CORNER TRIMLESS 120x120



Colour Codes:

0 Colours 1 White 2 Titan 3 Black 9 Anod.

LED GEAR TRAY



Type:

1 Electronic 2 Dimmer 3 Emergency*

Led Colour Codes:

1 Cool 2 Warm 3 Neutral

* Not possible at L564mm and L844mm

Additional technical details

- Easy tool less installation
- Continuous lighting lines without black spots
- Upon request: Pre-wired for standard, dali or emergency edition

PROFESSIONAL RECESSED LUMINAIRES



- Body from extruded aluminium profile.
- PMMA diffuser in opal, microprismatic, microprismatic opal or anaglyph edition or blind aluminium cover painted.

Code Description

996221	Easyline corner profile Trim metal blind
996222	Easyline corner profile Trim opal
996223	Easyline corner profile Trim microprismatic
996224	Easyline corner profile Trim anaglyph
996225	Easyline corner profile Trim microprismatic opal
996231	Easyline corner profile Trimless metal blind
996232	Easyline corner profile Trimless opal
996233	Easyline corner profile Trimless microprismatic
996234	Easyline corner profile Trimless anaglyph
996235	Easyline corner profile Trimless microprismatic opal
968255	Trunking Metal Connectors pair



- Body from extruded aluminium profile anodized.
- PMMA clear cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: High efficiency: 206 Lm/Watt 4000K at 250mA
195 Lm/Watt 3000K at 250mA
High output: 201 Lm/Watt 4000K at 350mA
189 Lm/Watt 3000K at 350mA
Maximum output: 186 Lm/Watt 4000K at 600mA
175 Lm/Watt 3000K at 600mA

Code Description

994	Easyline Led Gear Tray
-----	------------------------

Length - Watt:

High Efficiency

01	L 564-10W
02	L 844-15W
03	L1124-20W
04	L1404-25W
05	L1684-30W
06	L1964-35W
07	L2244-40W

High Output




11	L 564-16W
12	L 844-24W
13	L1124-32W
14	L1404-40W
15	L1684-48W
16	L1964-56W
17	L2244-64W

Maximum Output




21	L 564-27W
22	L 844-41W
23	L1124-55W
24	L1404-69W
25	L1684-82W
26	L1964-96W
27	L2244-111W

EASYLINE

LED SPOT ADJUSTABLE

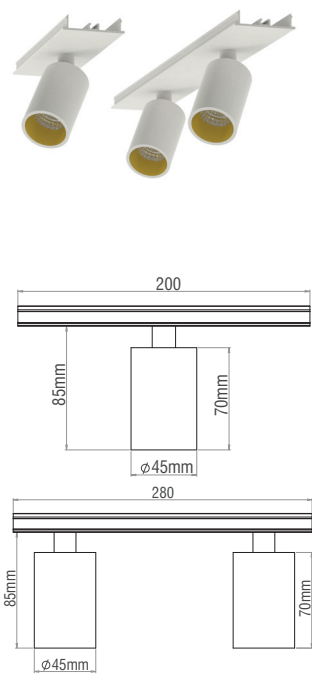

LED SPOT FIXED

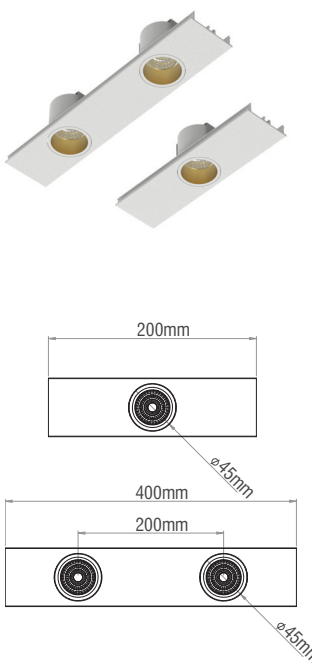

PROFESSIONAL RECESSED LUMINAIRES



- Aluminium body.
- Reflector or Lens in Medium & Wide version.
- 7W power consumption driven at 350mA.
- CRI: min. 80 / SDCM: 3.
- Luminous Efficacy: 7W: 4000 K: 117 Lm/Watt
7W: 3000 K: 112 Lm/Watt

Code	Description	Kg
99631	Led Spot 7W Adjustable Reflector	0,400
99632	Led Spot 2x7W Adjustable Reflector	0,700
99633	Led Spot 7W Adjustable Lens	0,400
99634	Led Spot 2x7W Adjustable Lens	0,700




- Aluminium body.
- Reflector or Lens in Medium & Wide version.
- 7W power consumption driven at 350mA.
- CRI: min. 80 / SDCM: 3.
- Luminous Efficacy: 7W: 4000 K: 117 Lm/Watt
7W: 3000 K: 112 Lm/Watt

Code	Description	Kg
99635	Led Spot 7W Fixed Reflector	0,400
99636	Led Spot 2x7W Fixed Reflector	0,700
99637	Led Spot 7W Fixed Lens	0,400
99638	Led Spot 2x7W Fixed Lens	0,700

EASYLINE


EASYLINE TRACK 3Phase

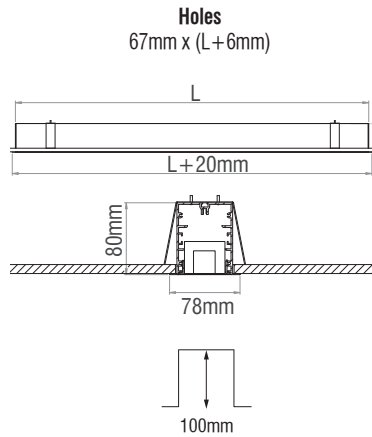

- Aluminium profile.
- 3phase track included.

Code	Description	L	Kg
99642050	Easyline Track 3Phase	500	1,600
99642100	Easyline Track 3Phase	1000	3,000
99642150	Easyline Track 3Phase	1500	4,600
99642200	Easyline Track 3Phase	2000	6,000
99642300	Easyline Track 3Phase	3000	9,000

EASYLINE WW

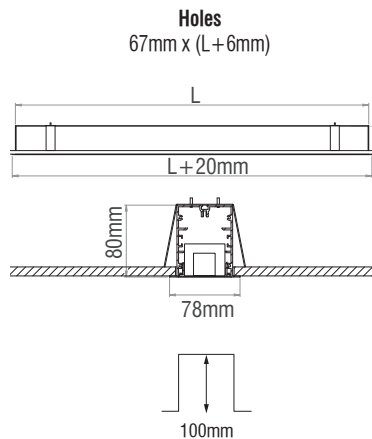

- Aluminium profile.
- WW Lens from PMMA
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt 4000K at 350mA
189 Lm/Watt 3000K at 350mA

Code	Description	L	Kg
99660004	Easyline WW 16W	620	1,850
99661004	Easyline WW 24W	900	2,700
99662004	Easyline WW 32W	1180	3,600
99663004	Easyline WW 40W	1460	4,400
99664004	Easyline WW 48W	1740	5,250

For dimmer version add letter "D" at the end of product code.

CABLE CONNECTIONS




- PTFE cable connenctions.
- 3pole for standard version and 5pole for dimmer.

Code	Description	L	Kg
996510	Cable connections 3x0,75mm ² /m		0,200
996511	Cable connections 3x0,75mm ²	1500	0,280
996512	Cable connections 3x0,75mm ²	2500	0,380
996520	Cable connections 5x0,75mm ² /m		0,230
996521	Cable connections 5x0,75mm ²	1500	0,300
996522	Cable connections 5x0,75mm ²	2500	0,440

EASYLINE

PROFESSIONAL RECESSED LUMINAIRES


EASYLINE BRACKET (Trim)

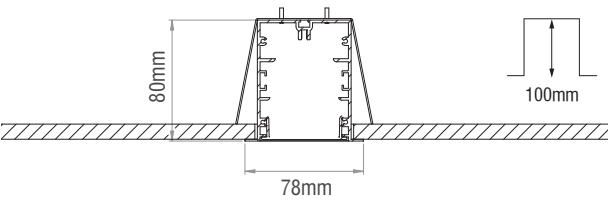

- Metal suspension bracket for Trim edition.
- Required 1pc per 1m profile length.

Code	Description	Kg
900211	Suspension Bracket Easyline Trim	0,100


EASYLINE BRACKET (Trimless)

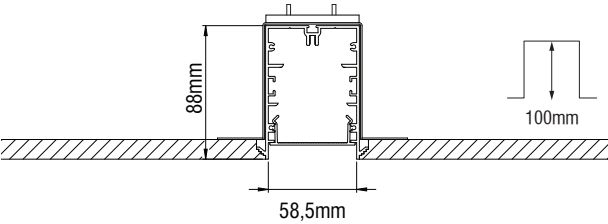

- Metal suspension bracket for surface edition as trimless.
- Required 1pc per 1m profile length.

Code	Description	Kg
900212	Suspension Bracket Easyline for Trimless & Surface Trimless *	0,100

EASYLINE BRACKET (Surface Luminaire as Trimless)

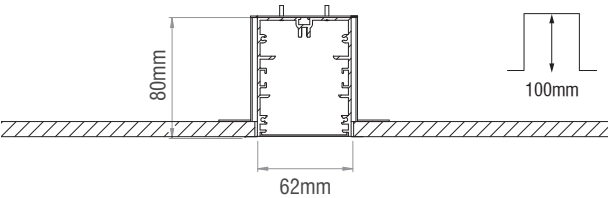

* Surface profile with Trimless edition brackets

