

BEAT

OUTDOOR


*Floor mounted luminaire,
with plain and accurate design,
for outdoor applications.*

Technical Features

- Body from stainless steel 316L.
- Tempered protection glass 2mm.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Supplied with 2x0,75mm NEOPRENE 1m cable.


Upon Request

- Available at 2700K.
- Available with highest colour rendering index (CRI)




Note: For the proper installation of the fitting an effective drainage as well as a 10cm deep layer of gravel must be intended for dewatering.


SPOT

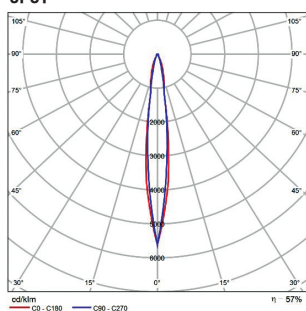

MEDIUM


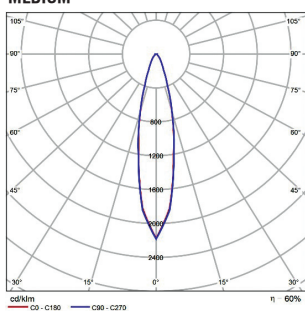


WIDE

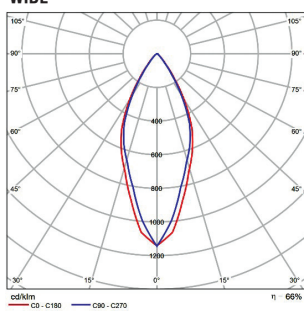


BEAT

OUTDOOR

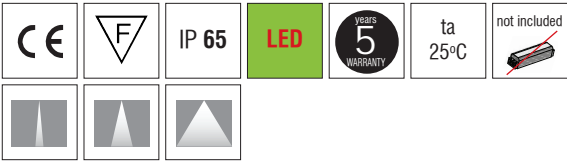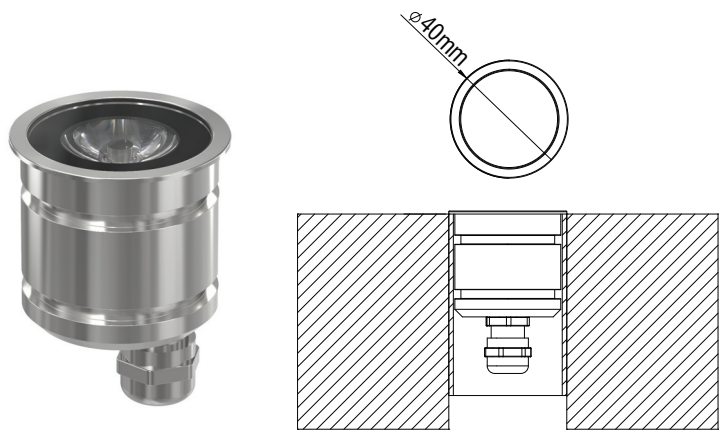

- Lens in Spot, Medium and Wide.
- 2W power consumption driven at 700mA.
- CRI: min. 80 / SDCM: 3.
- Luminous Efficacy:
2W: 4000 K: 152 Lm/Watt
2W: 3000 K: 142 Lm/Watt

Code	Description	Kg
84247 0	BEAT 2W IP65	0,200

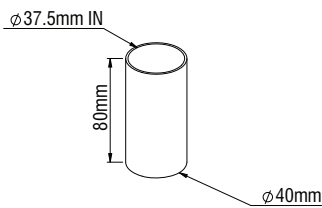

Outercasing (included)

		DRIVER DIMMER		
		DRIVER	700mA 20W IP20	700mA 20W IP20
		700mA 11W IP65	111x52x22	111x52x22
		16,1x2,2x2,2	Dali	1 - 10V / Push Button
CODES	MODULES	800140	800014	800016
84247 0	BEAT 2W IP65	1 - 5 luminaires	1 - 8 luminaires	1 - 8 luminaires

LED COLOUR CODES:		BEAM CODES:		
<div>2</div> Warm	<div>3</div> Neutral	<div>01</div> spot	<div>02</div> medium	<div>03</div> wide