

CYCLONE SLIM TWO WAY

ARCHITECTURAL SURFACE & PENDANT LUMINAIRES




This luminaire combines the architectural style with the efficiency. It produces perfect lighting conditions without annoying reflections and that is why it can be used from entrance areas to offices. The visual benefit: The continuous-row system is illuminated absolutely uniformly from beginning to end, is economically efficient, is maintenance-free and it has long service life.

Technical Features

- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- Direct and indirect illumination.
- Pure light without IR/UV radiation.
- Only for pendant installation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V-50/60Hz.




Upon request:

- Connection for emergency lighting system, for one or three hours.
- With microprismatic cover *.

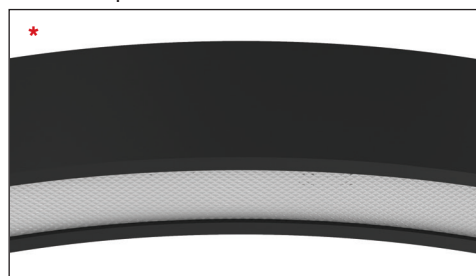

CYCLONE SLIM TWO WAY

ARCHITECTURAL SURFACE & PENDANT LUMINAIRES

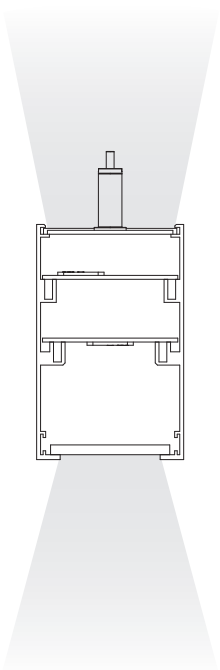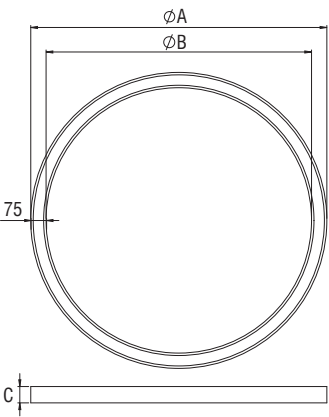

CE

F

CB

IP 20

LED

5 YEARS WARRANTY

ta 25°C

Included

- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description	Dimensions mm		
		ØA	ØB	C
8246052	Cyclone Slim 1 Two Way 38W+30W Warm	600	450	120
8246053	Cyclone Slim 1 Two Way 38W+30W Neutral	600	450	120
8246062	Cyclone Slim 2 Two Way 52W+37W Warm	800	650	120
8246063	Cyclone Slim 2 Two Way 52W+37W Neutral	800	650	120
8246072	Cyclone Slim 3 Two Way 79W+51W Warm	1100	950	120
8246073	Cyclone Slim 3 Two Way 79W+51W Neutral	1100	950	120
8246082	Cyclone Slim 4 Two Way 99W+58W Warm	1450	1300	120
8246083	Cyclone Slim 4 Two Way 99W+58W Neutral	1450	1300	120

For dimmer version add letter “D” at the end of product code.

Colour Codes:

0 Colours

1 White

2 Titan

3 Black

CYCLONE SLIM TWO WAY

ARCHITECTURAL SURFACE & PENDANT LUMINAIRES






CYCLONE SLIM TWO WAY

ARCHITECTURAL SURFACE & PENDANT LUMINAIRES



CYCLONE SLIM TWO WAY

CYCLONE SLIM PART TWO WAY

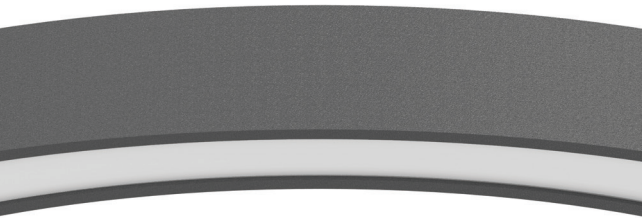

Colour Codes:

0 Colours 1 White 2 Titan 3 Black

ARCHITECTURAL SURFACE & PENDANT LUMINAIRES



- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description	Dimensions mm		
		ØA	B	C ^(o)
8246362	Cyclone Slim 5 Two Way Part 50W+34W Warm	2000-1850	1700	120
8246363	Cyclone Slim 5 Two Way Part 50W+34W Neutral	2000-1850	1700	120
8246372	Cyclone Slim 6 Two Way Part 43W+27W Warm	3000-2850	1675	72
8246373	Cyclone Slim 6 Two Way Part 43W+27W Neutral	3000-2850	1675	72
8246382	Cyclone Slim 7 Two Way Part 43W+27W Warm	4000-3850	1670	51
8246383	Cyclone Slim 7 Two Way Part 43W+27W Neutral	4000-3850	1670	51
8246392	Cyclone Slim 8 Two Way Part 53W+37W Warm	5000-4850	2100	51
8246393	Cyclone Slim 8 Two Way Part 53W+37W Neutral	5000-4850	2100	51

For dimmer version add letter “D” at the end of product code.




- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description	Dimensions mm		
		A	B	C
8246402	Cyclone Slim 9 Two Way Part 29W+20W Warm	1200	75	120
8246403	Cyclone Slim 9 Two Way Part 29W+20W Neutral	1200	75	120
8246412	Cyclone Slim 10 Two Way Part 16W+13W Warm	600	75	120
8246413	Cyclone Slim 10 Two Way Part 16W+13W Neutral	600	75	120
8246422	Cyclone Slim 11 Two Way Part 8W+5W Warm	300	75	120
8246423	Cyclone Slim 11 Two Way Part 8W+5W Neutral	300	75	120

For dimmer version add letter “D” at the end of product code.

CYCLONE SLIM TWO WAY

SINGLE ADJUSTABLE SUSPENSION



POWER SUPPLY



- Stainless steel cable and regulators.
- **Required:**
3 pieces for each luminaire.

Code	Description	L	Kg
900111	Single Suspension	500	0,050
900112	Single Suspension	1000	0,100
900113	Single Suspension	1500	0,150
900114	Single Suspension	2000	0,200
900116	Single Suspension	3000	0,300



- Plastic body.
- With transparent cable 5x0,50mm².

Code	Description	L	Kg
900162	Power Supply 5x0,50mm ² with Rosette Ø75	1000	0,120
900164	Power Supply 5x0,50mm ² with Rosette Ø75	2000	0,240
900166	Power Supply 5x0,50mm ² with Rosette Ø75	3000	0,360
900167	Power Supply 5x0,50mm ² with Rosette Ø75	4000	0,500

POWER SUPPLY



- For pendant use.
- Rosette from aluminium profile with 2m transparent cable 5x0,50mm² or 8x0,50mm² for dimmer or emergency versions in square or round version.

Code	Description	Kg
90048	Power Supply 5x0,50mm ² L 2m Ø100	0,250
90049	Power Supply 5x0,50mm ² L 2m 100x100	0,300
90052	Power Supply 8x0,50mm ² L 2m Ø100	0,280
90053	Power Supply 8x0,50mm ² L 2m 100x100	0,330

Colour Codes:

0 Colours 1 White 2 Titan 3 Black