

*Wall mounted luminaire,
with plain and accurate design,
for outdoor applications.*

Technical Features



- Aluminium body, painted electrostatically in selected colour.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Supplied with 2x0,75mm NEOPRENE 1m cable for 24V version and with 3x0,75mm NEOPRENE 1m cable for 230V version.



MIRTO / MIRTO 230

OUTDOOR


MIRTO

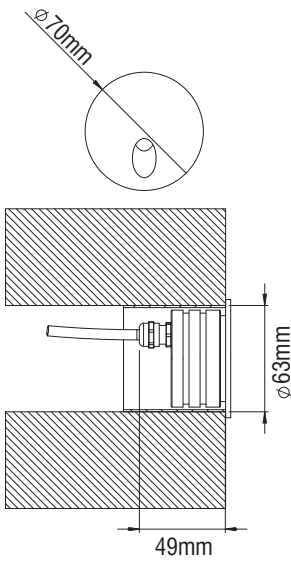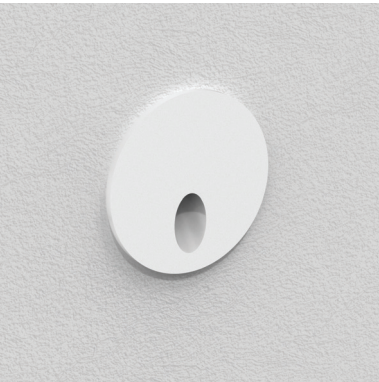

- Aluminium body.
- Connection for operation 24V DC.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
2W: 3000 K: 100 Lm/Watt
2W: 4000 K: 107 Lm/Watt

Code	Description	Kg
85837	MIRTO LED 2W IP65 Warm	0,400
85838	MIRTO LED 2W IP65 Neutral	0,400

MIRTO L

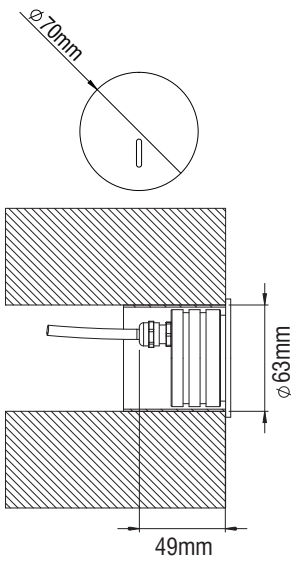



- Aluminium body.
- Connection for operation 24V DC.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
2W: 3000 K: 100 Lm/Watt
2W: 4000 K: 107 Lm/Watt

Code	Description	Kg
86640	MIRTO L LED 2W IP65 Warm	0,400
86641	MIRTO L LED 2W IP65 Neutral	0,400

MIRTO / MIRTO 230

OUTDOOR


MIRTO Q

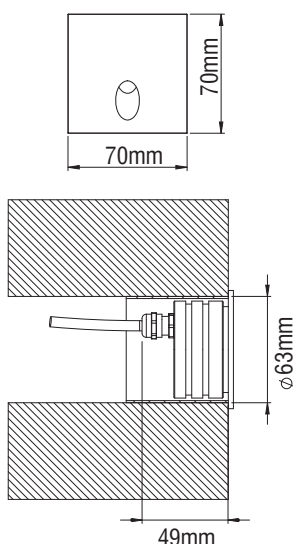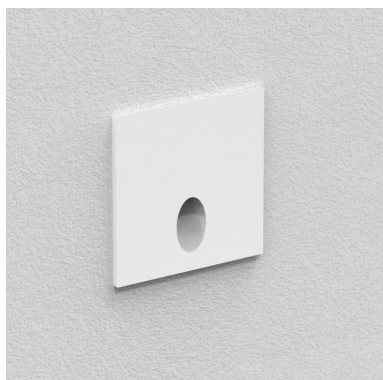

- Aluminium body.
- Connection for operation 24V DC.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
2W: 3000 K: 100 Lm/Watt
2W: 4000 K: 107 Lm/Watt


Code	Description	Kg
85848	MIRTO Q LED 2W IP65 Warm	0,400
85849	MIRTO Q LED 2W IP65 Neutral	0,400

MIRTO Q L

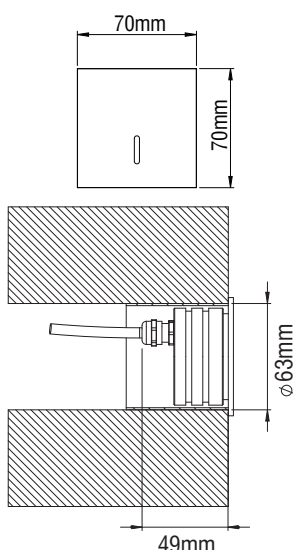

- Aluminium body.
- Connection for operation 24V DC.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
2W: 3000 K: 100 Lm/Watt
2W: 4000 K: 107 Lm/Watt

Code	Description	Kg
86642	MIRTO Q L LED 2W IP65 Warm	0,400
86643	MIRTO Q L LED 2W IP65 Neutral	0,400

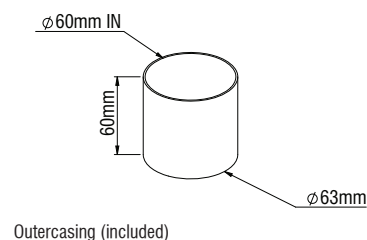

		DRIVER DIMMER		
		DRIVER		24V DC 18W IP20
		24V DC 6W IP20	24V DC 16W IP42	175x43x30
		52x43,5x21,5	90x40x29	Dali/Push B.
CODES	MODULES	800132	800133	800143
85837	MIRTO LED 2W IP65 Warm	1 luminaire	1 - 3 luminaires	1 - 4 luminaires
85838	MIRTO LED 2W IP65 Neutral	1 luminaire	1 - 3 luminaires	1 - 4 luminaires
86640	MIRTO L LED 2W IP65 Warm	1 luminaire	1 - 3 luminaires	1 - 4 luminaires
86641	MIRTO L LED 2W IP65 Neutral	1 luminaire	1 - 3 luminaires	1 - 4 luminaires
85848	MIRTO Q LED 2W IP65 Warm	1 luminaire	1 - 3 luminaires	1 - 4 luminaires
85849	MIRTO Q LED 2W IP65 Neutral	1 luminaire	1 - 3 luminaires	1 - 4 luminaires
86642	MIRTO Q L LED 2W IP65 Warm	1 luminaire	1 - 3 luminaires	1 - 4 luminaires
86643	MIRTO Q L LED 2W IP65 Neutral	1 luminaire	1 - 3 luminaires	1 - 4 luminaires



Colour Codes:

0 Colours 1 White 2 Titan 3 Black 4 Chrome 5 matt Alum.

MIRTO / MIRTO 230

OUTDOOR


MIRTO 230

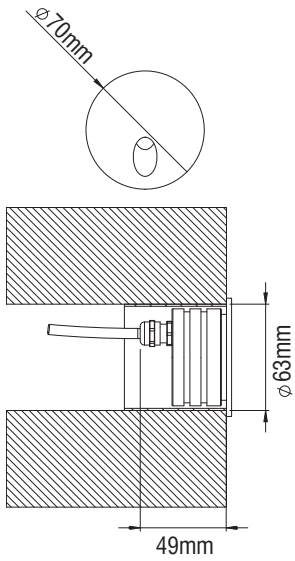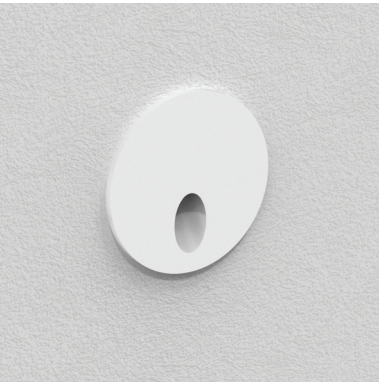

- Aluminium body.
- Dimmer Phase Cut.
- Power LED 230V AC/50Hz.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
4W: 3000 K: 122 Lm/Watt
4W: 4000 K: 115 Lm/Watt

Code	Description	Kg
85844	MIRTO 230 LED 4W IP65 Warm	0,400
85845	MIRTO 230 LED 4W IP65 Neutral	0,400

MIRTO 230 L

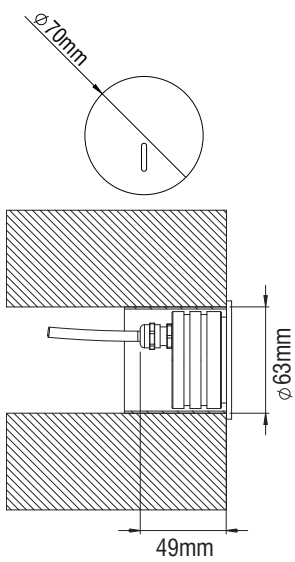



- Aluminium body.
- Dimmer Phase Cut.
- Power LED 230V AC/50Hz.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
4W: 3000 K: 122 Lm/Watt
4W: 4000 K: 115 Lm/Watt

Code	Description	Kg
86644	MIRTO 230 L LED 4W IP65 Warm	0,400
86645	MIRTO 230 L LED 4W IP65 Neutral	0,400

MIRTO / MIRTO 230

OUTDOOR

MIRTO 230 Q

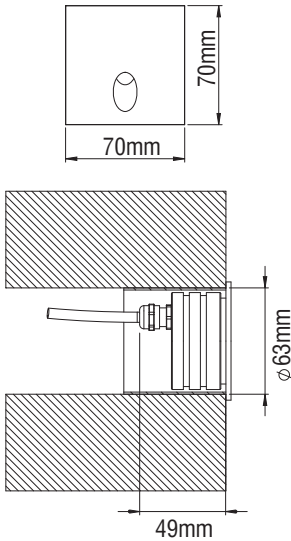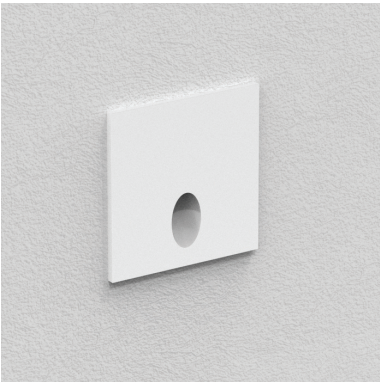

CE

F

IP 65

LED


5 YEARS WARRANTY

ta 25°C

- Aluminium body.
- Dimmer Phase Cut.
- Power LED 230V AC/50Hz.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
4W: 3000 K: 122 Lm/Watt
4W: 4000 K: 115 Lm/Watt

Code	Description	Kg
85846	MIRTO 230 Q LED 4W IP65 Warm	0,400
85847	MIRTO 230 Q LED 4W IP65 Neutral	0,400

MIRTO 230 Q L

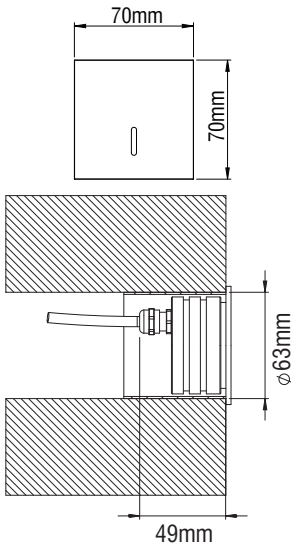

CE

F

IP 65


LED

5 YEARS WARRANTY

ta 25°C

- Aluminium body.
- Dimmer Phase Cut.
- Power LED 230V AC/50Hz.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
4W: 3000 K: 122 Lm/Watt
4W: 4000 K: 115 Lm/Watt

Code	Description	Kg
86646	MIRTO 230 Q L LED 4W IP65 Warm	0,400
86647	MIRTO 230 Q L LED 4W IP65 Neutral	0,400

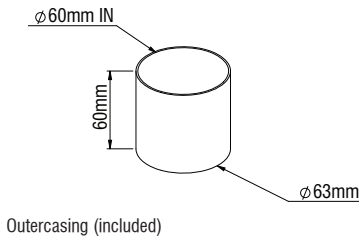

Colour Codes:

0 Colours

1 White

2 Titan

3 Black

4 Chrome

5 matt Alum.