



Technical Features

- Surface mounted luminaire.
- Luminaires - Steel body, electrostatically painted in white color.
- RVS: Mistlite protection glass, thickness 4mm, mounted on perimeter frame, from white colour aluminium, with high-strength seal rubber. The frame is secured to the body with stainless steel screws.
- OVS: Clear protection glass, thickness 4mm and louvre with transverse parabolic blades and longitudinal double-parabolic elements (reflectors), from anodized non-iridescent semi-specular aluminium (non-reflecting).


- Pressure compensation filter and PG13,5 cable gland IP68.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux.

Upon Request


- Connection for emergency lighting system, for one or three hours, in specific editions.

Luminaires suitable for **clean room**.

P 590 RVS LED

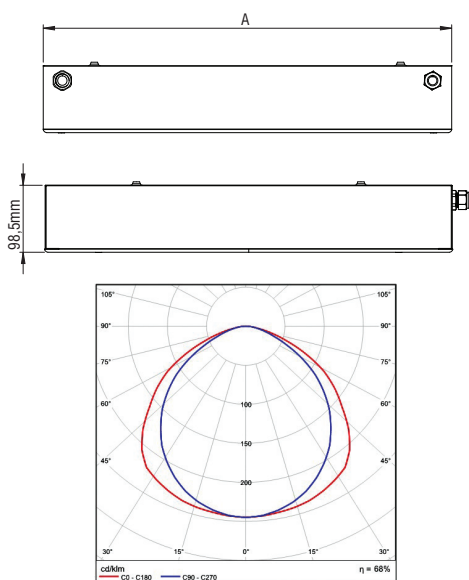

P 590 OVS LED

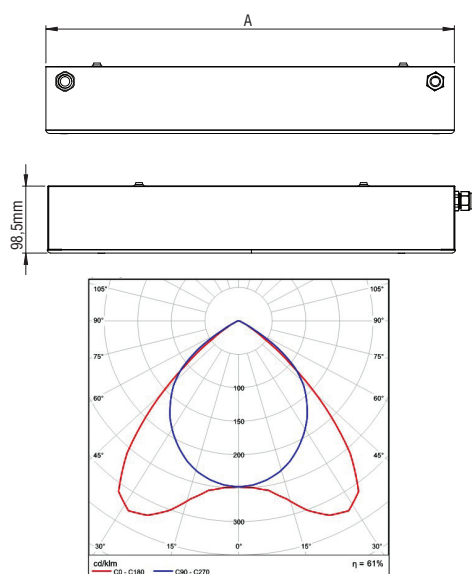


		IP 65	950°C	6,5 J	LED	5 years WARRANTY	ta 25°C	Included
---	---	-------	-------	-------	-----	--	---------	--

- Surface mounted luminaire.
- Mistlite protection glass.
- PMMA frosted linear led cover.
- CRI min: 80.

Description	Dimensions			Lumen	Code
	A	L	H		
RVS LED P594 40W Warm	598	598	98,5	5920	598603
RVS LED P594 40W Neutral	598	598	98,5	6360	598613
RVS LED P594 70W Warm	598	598	98,5	9800	598623
RVS LED P594 70W Neutral	598	598	98,5	10520	598633
RVS LED P592 40W Warm	298	1198	98,5	5920	598643
RVS LED P592 40W Neutral	298	1198	98,5	6360	598653
RVS LED P592 70W Warm	298	1198	98,5	9800	598663
RVS LED P592 70W Neutral	298	1198	98,5	10520	598673
RVS LED P592 50W Warm	298	1498	98,5	7400	598683
RVS LED P592 50W Neutral	298	1498	98,5	7950	598693
RVS LED P592 90W Warm	298	1498	98,5	12250	598703
RVS LED P592 90W Neutral	298	1498	98,5	13150	598713
RVS LED P594 80W Warm	598	1198	98,5	11840	598723
RVS LED P594 80W Neutral	598	1198	98,5	12720	598733
RVS LED P594 140W Warm	598	1198	98,5	19600	598743
RVS LED P594 140W Neutral	598	1198	98,5	21040	598753

For dimmer version add letter “D” at the end of product code.



- Surface mounted luminaire.
- Clear protection glass.
- Double parabolic aluminium louvre.
- PMMA frosted linear led cover.
- CRI min: 80.

Description	Dimensions			Lumen	Code
	A	L	H		
OVS LED P594 40W Warm	598	598	98,5	5920	597603
OVS LED P594 40W Neutral	598	598	98,5	6360	597613
OVS LED P594 70W Warm	598	598	98,5	9800	597623
OVS LED P594 70W Neutral	598	598	98,5	10520	597633
OVS LED P592 40W Warm	298	1198	98,5	5920	597643
OVS LED P592 40W Neutral	298	1198	98,5	6360	597653
OVS LED P592 70W Warm	298	1198	98,5	9800	597663
OVS LED P592 70W Neutral	298	1198	98,5	10520	597673
OVS LED P592 50W Warm	298	1498	98,5	7400	597683
OVS LED P592 50W Neutral	298	1498	98,5	7950	597693
OVS LED P592 90W Warm	298	1498	98,5	12250	597703
OVS LED P592 90W Neutral	298	1498	98,5	13150	597713
OVS LED P594 80W Warm	598	1198	98,5	11840	597723
OVS LED P594 80W Neutral	598	1198	98,5	12720	597733
OVS LED P594 140W Warm	598	1198	98,5	19600	597743
OVS LED P594 140W Neutral	598	1198	98,5	21040	597753

For dimmer version add letter “D” at the end of product code.