




NEMESIS RECESSED is an ideal solution for small showcases, homes, rest areas, museums, hotels, exhibition halls and generally for many decorative and architectural projects. Available in Medium and Wide light distribution can be the perfect tool for wide range of applications.

Technical Features

- Aluminium body, painted electrostatically in selected colour.
- Reflector in glossy black colour (for standard version).
- Lens in Medium and Wide version.
- Pure light without IR/UV radiation.
- Low glare (UGR < 19).
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation with constant current.


Upon Request

- Available with highest colour rendering index (CRI).
- Reflector in matt white or matt silver colour.

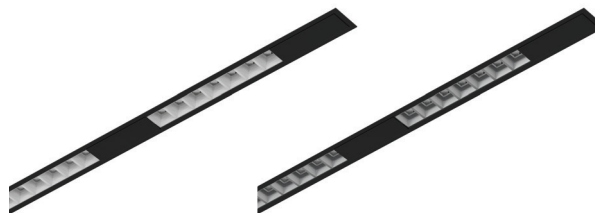


NEMESIS

NEMESIS

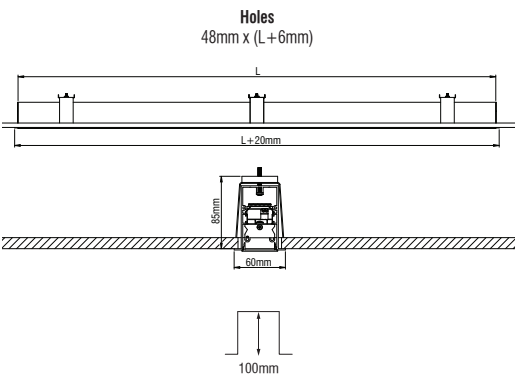

NEMESIS BL

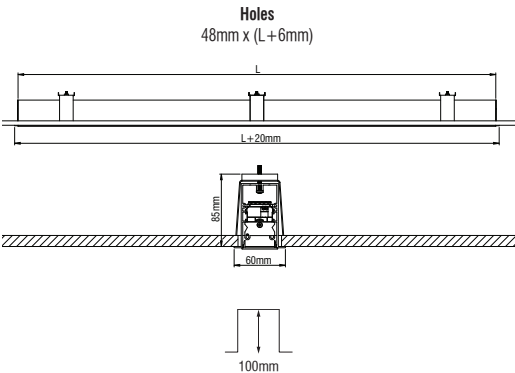

LED COLOUR CODES:	BEAM CODES:	Colour Codes:
2 Warm 3 Neutral	02 medium 03 wide	0 Colours 1 White 2 Titan 3 Black


PROFESSIONAL RECESSED LUMINAIRES



- Aluminium body.
- Lens in Medium and Wide version.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4000 K: 174 Lm/Watt
3000 K: 164 Lm/Watt

Code	Description	L	Kg
99831	NEMESIS 1 Recessed 9W	560	1,430
99832	NEMESIS 2 Recessed 17W	840	1,890
99833	NEMESIS 3 Recessed 26W	1120	2,450
99834	NEMESIS 4 Recessed 34W	1400	3,010
99835	NEMESIS 5 Recessed 43W	1680	3,520


For dimmer version add letter “D” at the end of product code.

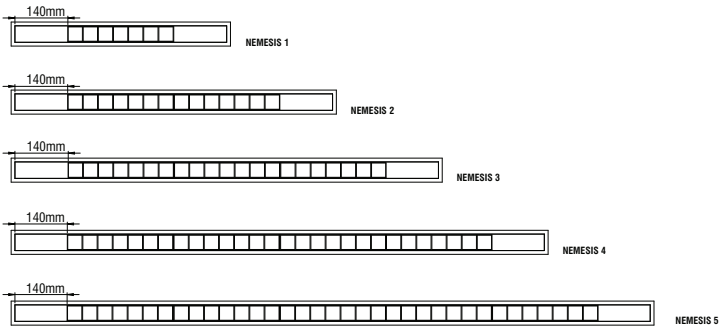

- Aluminium body.
- Lens in Medium and Wide version.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4000 K: 174 Lm/Watt
3000 K: 164 Lm/Watt


Code	Description	L	Kg
99843	NEMESIS 3 BL Recessed 17W	1120	2,430
99844	NEMESIS 4 BL Recessed 26W	1400	2,990
99845	NEMESIS 5 BL Recessed 26W	1680	3,480

For dimmer version add letter “D” at the end of product code.

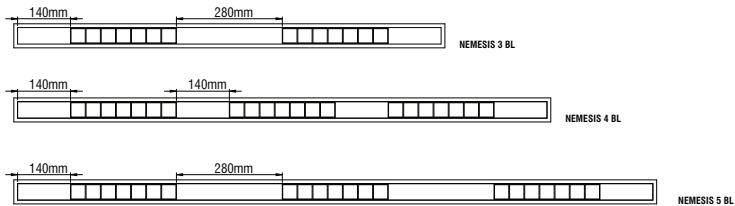

NEMESIS

NEMESIS FP

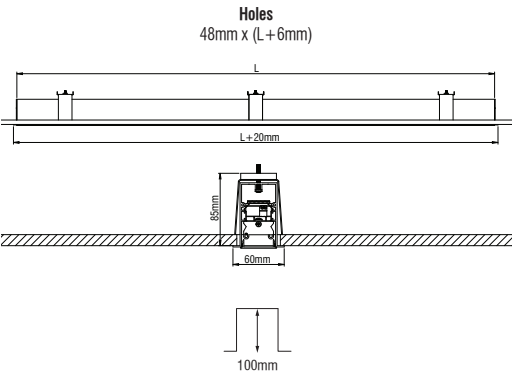


PROFESSIONAL RECESSED LUMINAIRES



- Aluminium body.
- Lens in Medium and Wide version.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4000 K: 174 Lm/Watt
3000 K: 164 Lm/Watt

Code	Description	L	Kg
99881	NEMESIS 1 FP Recessed 17W	560	1,430
99882	NEMESIS 2 FP Recessed 26W	840	1,890
99883	NEMESIS 3 FP Recessed 34W	1120	2,450
99884	NEMESIS 4 FP Recessed 43W	1400	3,010

For dimmer version add letter “D” at the end of product code.

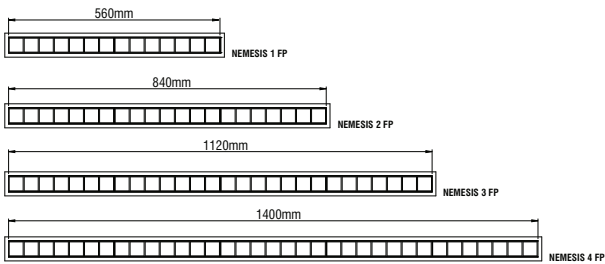

NEMESIS

TRUNKING CONNECTORS




END CAP



CABLE CONNECTIONS



HIGH SYSTEM ACCESSORY



Colour Codes:			
0	Colours	1	White
2	Titan	3	Black

PROFESSIONAL RECESSED LUMINAIRES




- Aluminium Trunking Connectors.

Code	Description
968255	Trunking Metal Connectors pair



- Aluminium end cap.

Code	Description	Kg
90595	High System End Cap (pair)	0,03



- PTFE cable connenctions.
- 3pole for standard version and 5pole for dimmer.

Code	Description	L	Kg
996510	Cable connections 3x0,75mm ² /m		0,200
996511	Cable connections 3x0,75mm ²	1500	0,280
996512	Cable connections 3x0,75mm ²	2500	0,380
996520	Cable connections 5x0,75mm ² /m		0,230
996521	Cable connections 5x0,75mm ²	1500	0,300
996522	Cable connections 5x0,75mm ²	2500	0,440



- Metal suspension bracket.
- Required 1pc per 1m profile length.

Code	Description	Kg
900230	Suspension Bracket High System	0,270