



A linear LED luminaire which illuminates facades uniformly and emphasises their surfaces. Although buildings fade over time, the proper lighting can add value to them, highlight their uniqueness and make a lasting impression.

Technical Features


- Aluminium body.
- Beam distribution lens.
- Adjustable.
- Safety glass cover.

- Die cast aluminium and caps.
- Silicone sealant.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10) (only for SLIM 3 - LED).
- Supplied with 3x1mm NEOPRENE 1,5m cable.


Upon request:

Available with highest colour rendering index (CRI)


SPOT




MEDIUM



WIDE





WW



SLIM 3 LED

OUTDOOR

SLIM 3 - LED

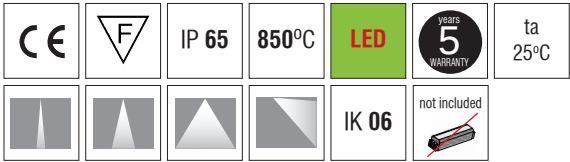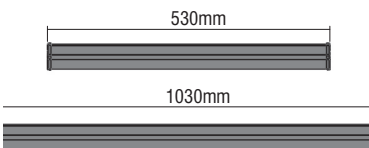

- Beams: Spot, Medium, Wide, WW.
- Adjustable.
- Anodized aluminium body.
- Glass cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
 - 6000 K: 135 Lm/Watt
 - 4000 K: 131 Lm/Watt
 - 3000 K: 123 Lm/Watt

Code	Description	Kg
812111-4	SLIM 3 LED 0,53m 21W (16-21W 6 Led)	1,400
812221-4	SLIM 3 LED 1,03m 39W (29-39W 12 Led)	1,900


		DRIVERS						DRIVERS DIMMER	
		700mA 50W IP20 1050mA 50W IP20	700mA 35W IP67	1050mA 100W IP67	700mA 75W IP67	700mA 30W IP20	1050mA 45W IP20	700mA 50W IP20 1050mA 50W IP20	700mA 38W IP20
		125x79x22	148x40x30	181x61x37,8	158x61x37,8	146,5x43,5x30	127x43x30	124x79x22	146,5x44x30
		800041	800029	800141	800142	800032	800013	1-10/ Push B./Dali	Dali/ Push B.
CODES	MODULES	800041	800029	800141	800142	800032	800013	800042	800038
812111-4	SLIM 3 LED 0,53m 16W (at 700mA)	1 - 3 luminaires	1 - 2 luminaires					1 - 3 luminaires	
812111-4	SLIM 3 LED 0,53m 21W (at 1050mA)	1 - 2 luminaires		2 - 5 luminaires				1 - 3 luminaires	
812221-4	SLIM 3 LED 1,03m 29W (at 700mA)	1 luminaire	1 luminaire		1 - 2 luminaires	1 luminaire		1 luminaire	1 luminaire
812221-4	SLIM 3 LED 1,03m 39W (at 1050mA)	1 luminaire		1 - 2 luminaires			1 luminaire	1 luminaire	

Led Colour:			Beams Codes:			
1 Cool	2 Warm	3 Neutral	1 spot	2 medium	3 wide	4 WW

SLIM 3 LED

SLIM 3 - LED RGBW

OUTDOOR



- Beams: Spot, Medium, WW.
- Adjustable.
- Anodized aluminium body.
- Glass cover.

Code	Description	Kg
8121919■4	SLIM 3 LED RGBW 0,53m 19W 24V DC	1,400
8125919■4	SLIM 3 LED RGBW 1,03m 38W 24V DC	1,900


DRIVERS 24V DC

CODE	DESCRIPTION	IP	DIMENSIONS mm
800071	DRIVER LED 24V DC/30W	20	153x41x32
800099	DRIVER LED 24V DC/50W	20	99x82x30
800097	DRIVER LED 24V DC/60W	20	180x52x30
800105	DRIVER LED 24V DC/60W	20	225x43x29,8
800098	DRIVER LED 24V DC/100W	20	122,5x97x26
800106	DRIVER LED 24V DC/100W	20	295x43x29,8
800058	DRIVER LED 24V DC/150W	20	152,5x97x26
800112	DRIVER LED 24V DC/200W	20	215x115x30
800088	DRIVER LED 24V DC/320W	20	215x115x30
800089	DRIVER LED 24V DC/60W	67	162,5x42,5x32
800092	DRIVER LED 24V DC/150W	67	191x63x37,5

CONTROL UNIT RGBW

CODE	DESCRIPTION	IP
800083	CONTROL UNIT RGBW 12/24VDC 216-432W + REMOTE CONTROL	20
800090	BOOSTER RGBW 576W 24VDC (FOR CODE 800083)	20
800122	CONTROL UNIT RGBW 480W 24VDC (PUSH BUTTON)	20
800123	REMOTE CONTROL (FOR UP TO 4 CONTROL UNITS - CODE 800122)	20
800149	BOOSTER RGBW 480W 24VDC (FOR CODE 800122)	20
800120	CONTROL UNIT RGBW 480W 24VDC DALI	20

SLIM 3 - LED ACCESSORIES



Code	Description Accessories	Kg
801101	Set aluminium brackets 10cm	0,300
801102	Set aluminium brackets 20cm	0,400



Code	Description Accessories	Kg
801105	CONNECTOR 4-POLE IP68	0,050

Beams Codes:
1 spot 2 medium 4 WW

SLIM 3 LED

OUTDOOR

