

A linear suspended luminaire with impressive design.
The luminaire unit is made of an opal diffuser and raises
the architectural interest because it appears almost immaterial.
It is ideal for applications where diffuse lighting
must be combined an elegant shape.


Technical Features

- Body of chrome aluminum profile.
- Opal PMMA diffuser.
- 360° lighting distrubution.
- Adjustable suspension consisting of stainless steel cable and regulators.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V/50Hz.

/ 166 / www.petridis-lighting.gr

STILO

STILO LED

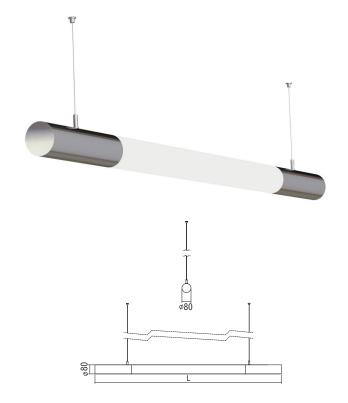

PROFESSIONAL SURFACE & PENDANT LUMINAIRES


















- Opal PMMA diffuser.
- With transparent cable 3x0,75mm² 1m.
- Rosette Ø80, driver 24V DC and suspensions 1m included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
- 140Lm/W at 4000 K
- 133Lm/W at 3000 K

Code	Description	L
95140■	Stilo Led 22W Warm	1665
95141≣	Stilo Led 22W Neutral	1665
95142■	Stilo Led 28W Warm	1965
95143■	Stilo Led 28W Neutral	1965

STILO VERTICAL LED







- Opal PMMA diffuser.
- With cable 3x0,75mm² 2m.
- Rosette $\varnothing 80$ and driver 24V DC included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy: 140Lm/W at 4000 K 133Lm/W at 3000 K

Code	Description	L
95144≣	Stilo Vertical Led 12W Warm	800
95145≣	Stilo Vertical Led 12W Neutral	800
95146■	Stilo Vertical Led 16W Warm	1100
95147≣	Stilo Vertical Led 16W Neutral	1100
95148≣	Stilo Vertical Led 24W Warm	1400
95149■	Stilo Vertical Led 24W Neutral	1400



www.petridis-lighting.gr / 167 /