




*KIVOS is a minimal surface wall mounted applique.
It is ideal for a wide range of outdoor applications due to it's high
protection degree IP65.*

Technical Features

- Body from die-cast aluminium, painted electrostatically in selected colour.
- Tempered protection glass 2mm.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Supplied with NEOPRENE 1m cable.

Upon Request

- Available at 2700K.
- Available with highest colour rendering index (CRI).





To ensure the degree of protection (sealing), the use of flexible power supply cable type H07RN-F (in appropriate diameter) is required.

KIVOS

OUTDOOR

KIVOS

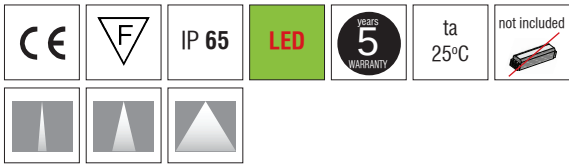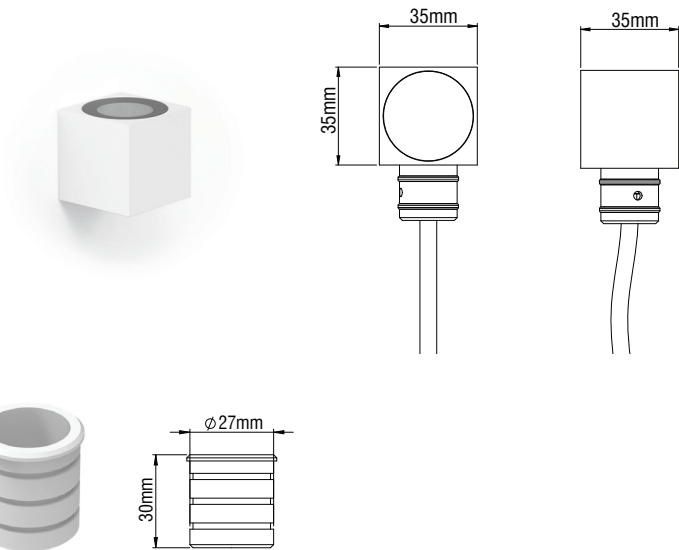

- Aluminium body.
- Lens in Spot, Medium and Wide.
- 2W power consumption driven at 700mA.
- Supplied with 2x0,75mm NEOPRENE 1m cable.
- CRI: min. 80 / SDCM: 3.
- Luminous Efficacy:
2W: 4000 K: 152 Lm/Watt
2W: 3000 K: 142 Lm/Watt

Code	Description	Kg
84752	KIVOS 2W IP65	0,090



DRIVER

700mA 11W IP65

161x22x22


CODES	MODULES	800140
84752	KIVOS 2W IP65	1 - 5 modules

KIVOS BIG

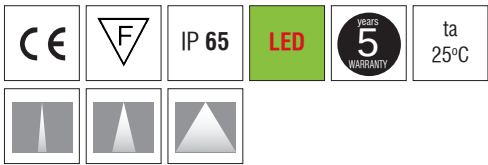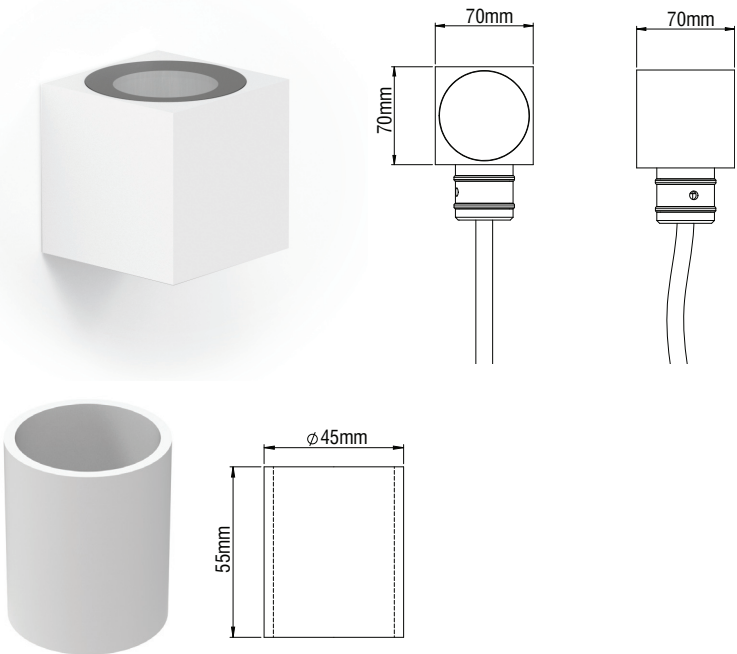

- Aluminium body.
- Lens: Spot, Medium, Wide.
- Dimmer Phase Cut.
- Power LED 230V AC/50Hz.
- Supplied with 3x0,75mm NEOPRENE 1m cable.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
4000 K: 116 Lm/Watt
3000 K: 110 Lm/Watt

Code	Description	Kg
84753	KIVOS BIG 4W IP65	0,200

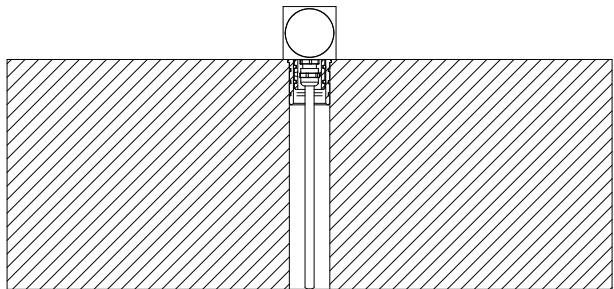

LED COLOUR CODES:	BEAM CODES:	Colour Codes:
2 Warm 3 Neutral	01 spot 02 medium 03 wide	0 Colours 1 White 2 Titan 3 Black