



Technical Features

- Body and cover in die-cast aluminum with minimum EN 47100 tittle with low content copper and high resistance to atmospheric agents.
- Pressure compensation filter in Teflon.
- Gaskets in anti-aging rubber, removable.
- Extra-clear tempered glass, 5 mm thick, with aesthetic silkscreen print in silver.
- Closure screws in stainless steel with TORX T20 imprint.
- External screws in stainless steel.
- Opening provides access to optics and cable box in a single and easy step by using two solid stainless screws.
- Galvanized steel bracket painted in Silver color.
- For the adjustment of floodlight, the floodlight with aluminum lateral protractor scale.
- Power supply cable through a cable gland PG13.
- Power correction factor at full load > 0.9.
- Power supply 220 - 240V / 50 - 60 Hz VAC.
- PLUS optic: symmetric optic designed in-house in two different beams, in order to meet different illumination needs.
- The optic consists of high purity aluminum (99,99%) reflectors, with elevated reflectance and performance.
- Available optics:
 - MB optic - Medium beam: 2x26°; with specular finishing;(*)
 - WB optic - Wide beam: 2x40°; with peened finishing.
- Available at Symmetric and Asymmetric editions.

Protection Against Surges

- CL I: up to 10kV in common mode and 6kV in differential mode.

Upon Request

- At colour temperature 3000K.




H07RN-F


To ensure the degree of protection (sealing), the use of flexible power supply cable type H07RN-F (in appropriate diameter) is required.

NEXT 6


LUMINAIRES WITH EXTRA PROTECTION







NEXT SIM. MB



NEXT SIM. WB



NEXT ASIM. A2

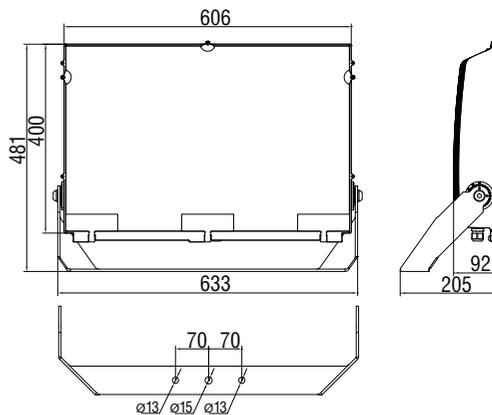

- Beams: Medium, Wide.
- Aluminium body.
- Colour temperature 4000K.
- CRI: min. 70.

Code	Description	Lumen Output (from luminaire)	Kg
718613	2 Next 6 Sym. Led 174W 4000K Titan	24600	14,000
718623	2 Next 6 Sym. Led 219W 4000K Titan	29500	14,000
718633	2 Next 6 Sym. Led 250W 4000K Titan	37200	14,000
718643	2 Next 6 Sym. Led 316W 4000K Titan	44800	14,000
718653002	Next 6 Asym. Led 174W 4000K Titan	23300	14,000
718663002	Next 6 Asym. Led 204W 4000K Titan	29000	14,000
718673002	Next 6 Asym. Led 219W 4000K Titan	28000	14,000
718683002	Next 6 Asym. Led 270W 4000K Titan	36500	14,000

BEAM CODES:
02 medium 03 wide