




Technical Features

- Housing in glazed self-extinguishing V2 polycarbonate, UV stabilised, injection moulded.
- Ecologic anti-aging injected sealing gasket.
- Gear-tray reflector unit in aluminium, painted in white polyester, fixed to the housing by quick-fastening steel devices, hinged opening.
- Diffuser in opal PMMA, injection moulded.


- Snug fit safety snap-lock clips for diffuser mounting in transparent polycarbonate, screwdriver opening.
- Mechanical strength to impacts IK02 (0.2 joule).
- Connection for operation on 230V-50/60Hz.

For LED Version:

- Last generation high efficient LED CHIP.
- Pure light without IR/UV radiation.
- Led life time 50000h (L80B10).

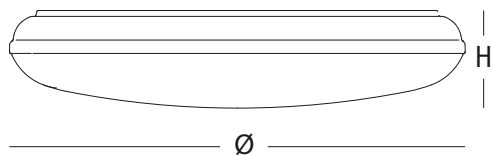

- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
 - 22W: 201 Lm/W at 4000K at 350mA
 - 22W: 189 Lm/W at 3000K at 350mA

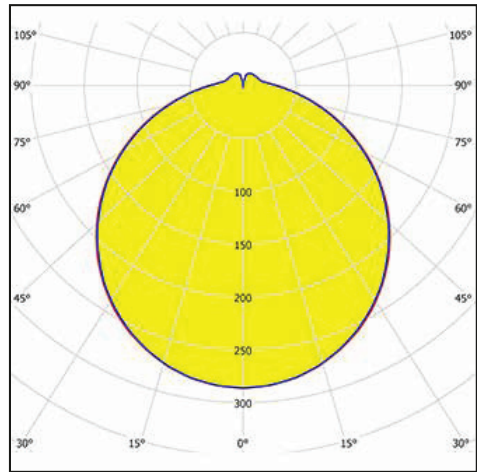

Code	Description	Dimensions		Kg
		D(mm)	H(mm)	
563013	ETRA 380 22W Warm	Ø380	117	1,800
563023	ETRA 380 22W Neutral	Ø380	117	1,800

For dimmer version add letter “D” at the end of product code.