


EASYLINE NEMESIS is an ideal solution for small showcases, homes, rest areas, museums, hotels, exhibition halls and generally for many decorative and architectural projects. Available in Wide light distribution can be the perfect tool for wide range of applications.

Technical Features

- Aluminium body, painted electrostatically in selected colour.
- Reflector in glossy black colour at wide version.
- Pure light without IR/UV radiation.
- Low glare (UGR < 19).
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation with constant current.


Upon Request

- Available with highest colour rendering index (CRI).

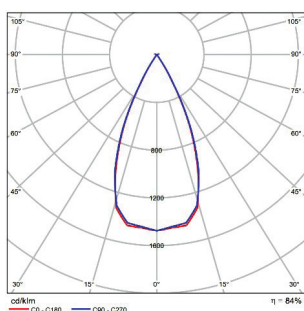


EASYLINE NEMESIS

EASYLINE NEMESIS BL

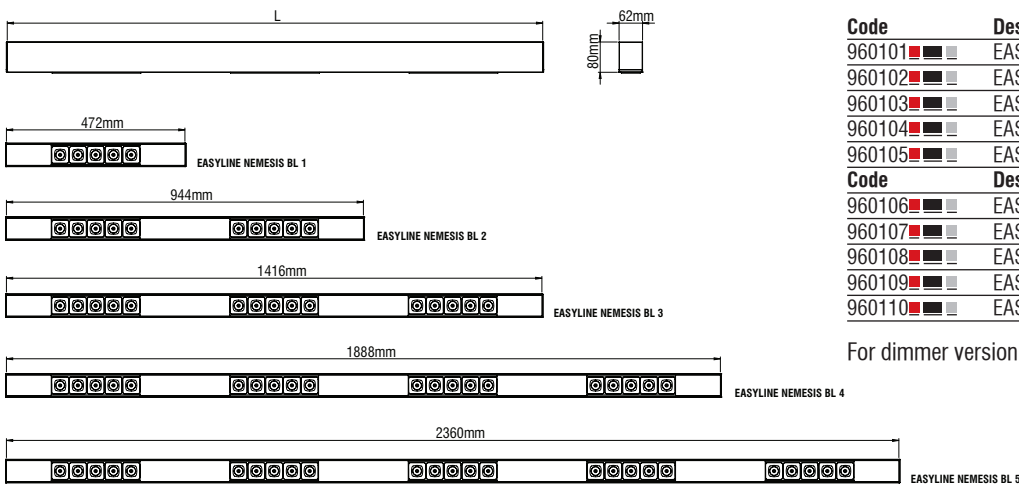

Professional Surface & Pendant Luminaires

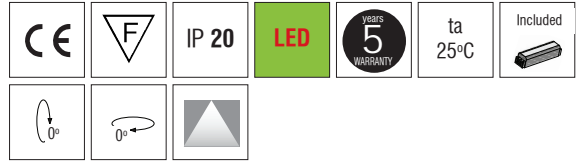

- Aluminium body.
- Reflector in Wide version.
- CRI: min. 90 / SDCM: 3
- Luminous Efficacy (for HE version):
4000 K: 146 Lm/Watt at 350mA
3000 K: 143 Lm/Watt at 350mA
- Luminous Efficacy (for HO version):
4000 K: 139 Lm/Watt at 700mA
3000 K: 136 Lm/Watt at 700mA


Code	Description (for HE version)
960101	EASYLINE NEMESIS BL 1 12W
960102	EASYLINE NEMESIS BL 2 22W
960103	EASYLINE NEMESIS BL 3 32W
960104	EASYLINE NEMESIS BL 4 41W
960105	EASYLINE NEMESIS BL 5 51W
Code	Description (for HO version)
960106	EASYLINE NEMESIS BL 1 23W
960107	EASYLINE NEMESIS BL 2 43W
960108	EASYLINE NEMESIS BL 3 64W
960109	EASYLINE NEMESIS BL 4 84W
960110	EASYLINE NEMESIS BL 5 105W

For dimmer version add letter "D" at the end of product code.


LED COLOUR CODES: 2 Warm 3 Neutral	BEAM CODES: 03 wide	Colour Codes: 0 Colours 1 White 2 Titan 3 Black 9 Anod.
--	-------------------------------	---

EASYLINE NEMESIS


EASYLINE NEMESIS UP/DOWN BL

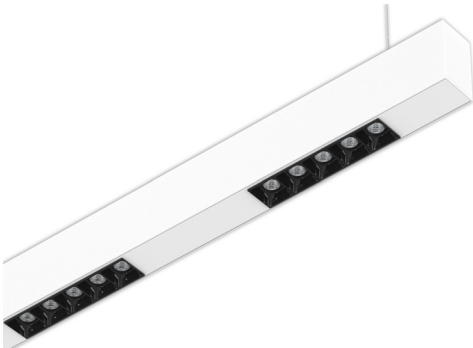

Professional Surface & Pendant Luminaires

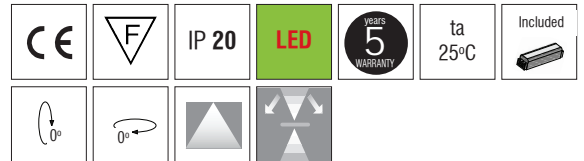

- Aluminium body.
- Reflector in Wide version.
- Suspension and power supply are not included.
- CRI: min. 90 / SDCM: 3
- Luminous Efficacy (for HE version):
4000 K: 146 Lm/Watt at 350mA (for down light)/ 206Lm/W at 250mA (for up light)
3000 K: 143 Lm/Watt at 350mA (for down light)/ 195Lm/W at 250mA (for up light)
- Luminous Efficacy (for HO version):
4000 K: 139 Lm/Watt at 700mA (for down light)/ 201Lm/W at 350mA (for up light)
3000 K: 136 Lm/Watt at 700mA (for down light)/ 189Lm/W at 350mA (for up light)

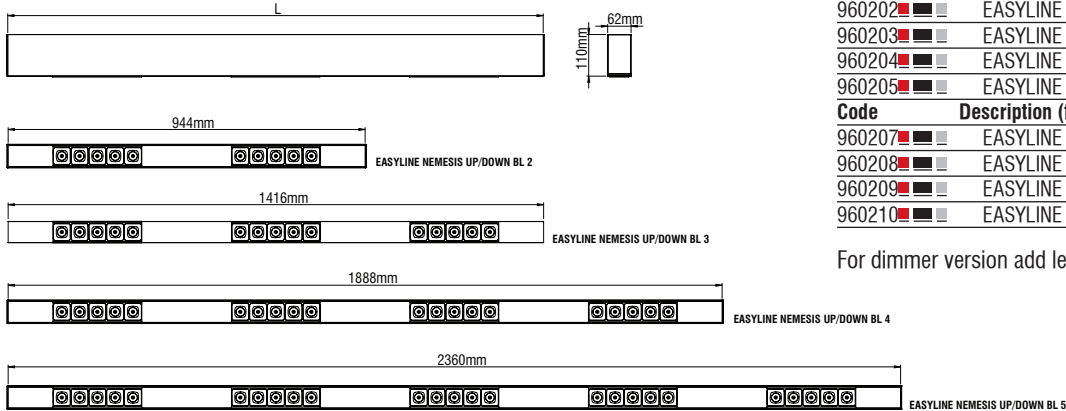

Code	Description (for HE version)
960202	EASYLINE NEMESIS UP/DOWN BL 2 22W/10W
960203	EASYLINE NEMESIS UP/DOWN BL 3 32W/20W
960204	EASYLINE NEMESIS UP/DOWN BL 4 41W/30W
960205	EASYLINE NEMESIS UP/DOWN BL 5 51W/30W
Code	Description (for HO version)
960207	EASYLINE NEMESIS UP/DOWN BL 2 43W/16W
960208	EASYLINE NEMESIS UP/DOWN BL 3 64W/32W
960209	EASYLINE NEMESIS UP/DOWN BL 4 84W/48W
960210	EASYLINE NEMESIS UP/DOWN BL 5 105W/48W

For dimmer version add letter "D" at the end of product code.

LED COLOUR CODES: 2 Warm 3 Neutral	BEAM CODES: 03 wide	Colour Codes: 0 Colours 1 White 2 Titan 3 Black 9 Anod.
--	-------------------------------	---

END CAP





Code	Description
99611	Easyline Plastic End Cap (pair) Surface
99615	Easyline Aluminium End Cap (pair) Surface
99619	Easyline Up/ Down Plastic End Cap (pair) Surface
99620	Easyline Up/ Down Aluminium End Cap (pair) Surface

BE CAREFUL

For special colours please order only aluminium end cap.

CORNER PROFILE 120x120



- Body from extruded aluminium profile.


Code	Description
996211	Easyline Corner Profile Surface metal blind
996220	Easyline Up/ Down Corner Profile Surface metal blind

EASYLINE NEMESIS


TRUNKING CONNECTORS



CABLE CONNECTIONS

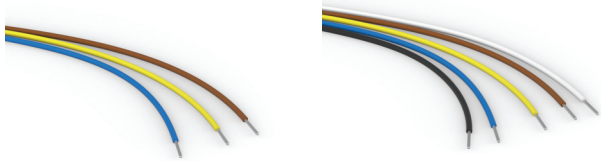

SINGLE ADJUSTABLE SUSPENSION

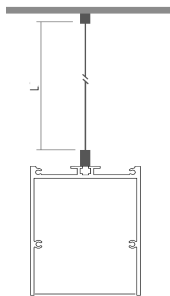

POWER SUPPLY



Colour Codes:

0 Colours 1 White 2 Titan 3 Black 9 Anod.

Professional Surface & Pendant Luminaires



- Aluminium Trunking Connectors.

Code	Description
968255	Trunking Metal Connectors pair



- PTFE cable connenctions.
- 3pole for standard version and 5pole for dimmer.

Code	Description	L	Kg
996510	Cable connections 3x0,75mm ² /m		0,200
996511	Cable connections 3x0,75mm ²	1500	0,280
996512	Cable connections 3x0,75mm ²	2500	0,380
996520	Cable connections 5x0,75mm ² /m		0,230
996521	Cable connections 5x0,75mm ²	1500	0,300
996522	Cable connections 5x0,75mm ²	2500	0,440



- Stainless steel cable and regulators.

- **Required:**
2 pieces for up to 3m profile.

Code	Description	L	Kg
900112	Single Suspension	1000	0,100
900114	Single Suspension	2000	0,200
900116	Single Suspension	3000	0,300
996590	Single Suspension for Up / Down	1000	0,100
996591	Single Suspension for Up / Down	2000	0,200
996592	Single Suspension for Up / Down	3000	0,300



- For pendant use.
- **Standard version:** Rosette from aluminium profile with 2m transparent cable 3x0,75mm² or 5x0,50mm² for dimmer or emergency versions in square or round version.
- **Up/Down version:** Rosette from aluminium profile with 2m transparent cable 5x0,50mm² or 8x0,50mm² for dimmer or emergency versions in square or round version.

Code	Description	Kg
90042	Power Supply 3x0,75mm ² L 2m Ø80	0,130
90043	Power Supply 3x0,75mm ² L 2m Ø70	0,130
90044	Power Supply 3x0,75mm ² L 2m 80x80	0,210
90045	Power Supply 3x0,75mm ² L 2m 70x70	0,200
90048	Power Supply 5x0,50mm ² L 2m Ø100	0,250
90049	Power Supply 5x0,50mm ² L 2m 100x100	0,300
90052	Power Supply 8x0,50mm ² L 2m Ø100	0,280
90053	Power Supply 8x0,50mm ² L 2m 100x100	0,330