

The FOGLIO recessed-mounted luminaire with its opal cover provides perfect lighting comfort and glare-free lighting.

The luminaire unit impresses with its design and unique uniform.

Technical Features

- Recessed luminaire for panels in mineral fibre with expose structure or plasterboard ceiling 600x600mm.
- Steel body with flat form, electrostatically painted in white colour.
- High efficient parabolic louvre from specular aluminium.
- Aluminium louvre with high efficient satin PMMA cover for louvre version.
- Last generation high efficient LED CHIP.
- Pure light without IR/UV radiation.
- Connection for operation on 230V-50/60Hz.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).

Upon request:


- Connection for emergency lighting system, for one or three hours.
- With microprismatic cover *.




/ 68 / www.petridis-lighting.gr

PROFESSIONAL RECESSED LUMINAIRES

FOGLIO
















ta 25°C



- High efficient satin PMMA cover.
- For exposed structure.
- CRI: min 80 / SDCM: 3.

Code	Description	
36407	Foglio Led 36W Neutral	Luminous Efficacy: 201 Lm/Watt at 350mA
36408	Foglio Led 44W Neutral	Luminous Efficacy: 195 Lm/Watt at 450mA
36417₌	Foglio Led 36W Warm	Luminous Efficacy: 189 Lm/Watt at 350mA
36418	Foolio Led 44W Warm	Luminous Efficacy: 183 Lm/Watt at 450mA

For dimmer version add letter "D" at the end of product code.








- High efficient satin PMMA cover.
- For exposed structure.
- CRI: min 80 / SDCM: 3.

/	/

	296
596	
	1196

Code	Description	
36441■	Foglio H Led 72W Neutral	Luminous Efficacy: 201 Lm/Watt at 350mA
36442■	Foglio H Led 88W Neutral	Luminous Efficacy: 195 Lm/Watt at 450mA
36443■	Foglio H Led 72W Warm	Luminous Efficacy: 189 Lm/Watt at 350mA
36444■	Foglio H Led 88W Warm	Luminous Efficacy: 183 Lm/Watt at 450mA

For dimmer version add letter "D" at the end of product code.



www.petridis-lighting.gr /69/


PROFESSIONAL RECESSED LUMINAIRES


LED

Included


25°C

















IP 20

(1)


For dimmer version add letter "D" at the end of product code.













- High efficient satin PMMA cover.
- For exposed structure.
- CRI: min 80 / SDCM: 3.


Code	Description	
36403■	Foglio Q H Led 33W Neutral	Luminous Efficacy: 189 Lm/Watt at 350mA
36404■	Foglio Q H Led 55W Neutral	Luminous Efficacy: 179 Lm/Watt at 575mA
36413■	Foglio Q H Led 33W Warm	Luminous Efficacy: 182 Lm/Watt at 350mA
36414■	Foglio Q H Led 55W Warm	Luminous Efficacy: 172 Lm/Watt at 575mA

For dimmer version add letter "D" at the end of product code.

/70/ www.petridis-lighting.gr

PROFESSIONAL RECESSED LUMINAIRES

FOGLIO L






- High efficient satin PMMA cover.
- For false ceiling in plasterboard.CRI: min 80 / SDCM: 3.


Code	Description	
36427■	Foglio L Led 36W Neutral	Luminous Efficacy: 201 Lm/Watt at 350mA
36428■	Foglio L Led 44W Neutral	Luminous Efficacy: 195 Lm/Watt at 450mA
36437■	Foglio L Led 36W Warm	Luminous Efficacy: 189 Lm/Watt at 350mA
36438■	Foglio L Led 44W Warm	Luminous Efficacy: 183 Lm/Watt at 450mA

For dimmer version add letter "D" at the end of product code.

/ **1** 1170x265mm

FOGLIO L H







- High efficient satin PMMA cover.
- For false ceiling in plasterboard.
- CRI: min 80 / SDCM: 3.

Code	Description	
36446■	Foglio L H Led 72W Neutral	Luminous Efficacy: 201 Lm/Watt at 350mA
36447■	Foglio L H Led 88W Neutral	Luminous Efficacy: 195 Lm/Watt at 450mA
36448■	Foglio L H Led 72W Warm	Luminous Efficacy: 189 Lm/Watt at 350mA
36449■	Foglio L H Led 88W Warm	Luminous Efficacy: 183 Lm/Watt at 450mA

For dimmer version add letter "D" at the end of product code.


www.petridis-lighting.gr /71/

PROFESSIONAL RECESSED LUMINAIRES

FOGLIO



PROFESSIONAL RECESSED LUMINAIRES

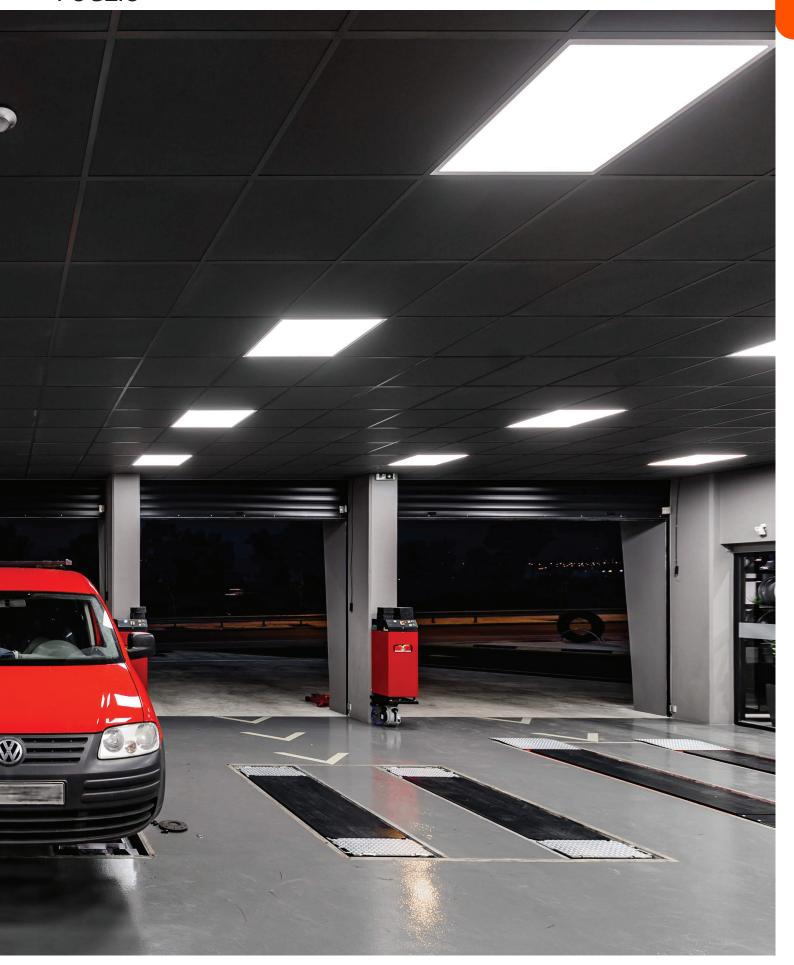


PROFESSIONAL RECESSED LUMINAIRES

Included

25°C

FOGLIO Q L








- High efficient satin PMMA cover.
- For false ceiling in plasterboard.
- CRI: min 80 / SDCM: 3.

	C0 - C180C90 - C270	Code	Description	
		36425■	Foglio Q L Led 36W Neutral L	Luminous Efficacy: 201 Lm/Watt at 350mA
596		36426≡	Foglio Q L Led 44W Neutral L	Luminous Efficacy: 195 Lm/Watt at 450mA
		36435⊒	Foglio Q L Led 36W Warm L	Luminous Efficacy: 189 Lm/Watt at 350mA
		36436≡	Foglio Q L Led 44W Warm L	Luminous Efficacy: 183 Lm/Watt at 450mA
		For dimr	ner version add letter " D " a	t the end of product code.


_20





/ **3** 575x575mm

FOGLIO Q H L











- High efficient satin PMMA cover.
- For false ceiling in plasterboard.
- CRI: min 80 / SDCM: 3.







IP 20

LED

For dimmer version add letter "D" at the end of product code.



/74/ www.petridis-lighting.gr

PROFESSIONAL RECESSED LUMINAIRES



www.petridis-lighting.gr / 75 /