



LUNA ROUND LED: Due to its high system light output, Luna Round LED can replace even a downlight with 2x32W TC-DeI lamps.

This compact luminaire is ideal for applications where diffuse light is needed.

Technical Features

- Outer ring from die-cast aluminium, painted electrostatically in selected colour or plated.
- Inner body from die-cast aluminium.
- High pure aluminium reflectors anodized.
- Crusiform louvre non-iridescent with parabolic blades made of pure aluminium.
- Protection glass available in silkscreen TRD, sandblast SB or Mist-lite.
- Support to the ceiling with springs.
- Pure light without IR/UV radiation.
- Die cast aluminum heatsink anodized.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation with Constant Current.

Upon request:



Available with highest colour rendering index (CRI)

LUNA ROUND 175


LUNA ROUND 175 LED CHIP



Ø 155mm



LUNA ROUND 175 Ring & Cover

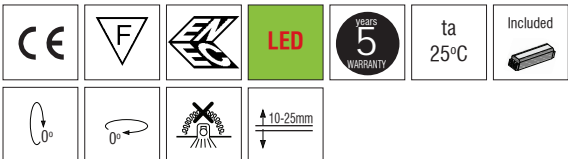

- Version for LED CHIP.
- Inner body from die-cast aluminium.
- 19W power consumption driven at 500mA.
- 26W power consumption driven at 700mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
 - 19W: 4000 K: 156 Lm/Watt
 - 19W: 3000 K: 149 Lm/Watt
 - 26W: 4000 K: 154 Lm/Watt
 - 26W: 3000 K: 148 Lm/Watt

| Code | Description | Kg |
|--------|-----------------------------|-------|
| 4653 1 | LUNA ROUND 175 LED CHIP 19W | 0,830 |
| 4653 3 | LUNA ROUND 175 LED CHIP 26W | 1,000 |

For dimmer version add letter “D” at the end of product code.



- Outer ring from die-cast aluminium.
- Sandblast methacrylate PMMA cover.

| Code | Description | Kg |
|-------|--------------------------------------|-------|
| 40024 | LUNA ROUND RING 175 LED IP43 + COVER | 0,120 |
| 40018 | LUNA ROUND RING 175 LED IP54 + COVER | 0,120 |

| LED COLOUR CODES: | Colour Codes: |
|-------------------|---|
| 2 Warm 3 Neutral | 0 Colours 1 White 2 Titan 3 Black 4 Chrome 5 matt Alum. |

