

BOX AS TRIMLESS

ARCHITECTURAL RECESSED LUMINAIRES



*BOX recessed asymmetric combines stringent basic geometry with perfect contemporary style.*

*Uniformly illuminated, without annoying reflections, it gives a strong architectural identity to various working areas (offices, stores, houses etc).*

#### **Technical Features**


- Aluminium body, painted electrostatically in white colour.
- Opal plexi glass cover.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V-50/60Hz.

#### **Upon Request**


- Connection for emergency lighting system, for one or three hours.

# BOX AS TRIMLESS



## BOX AS 424 TRIMLESS

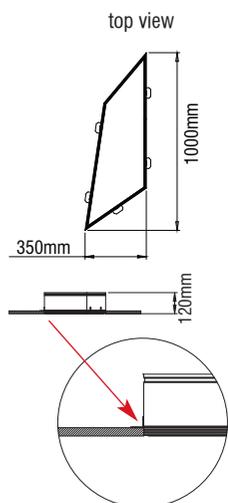

## BOX AS 224 TRIMLESS

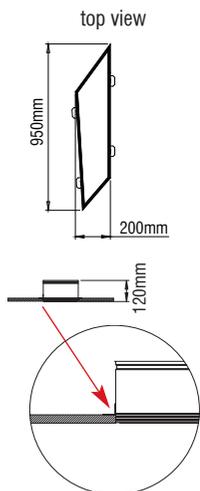

## BOX AS 254 TRIMLESS

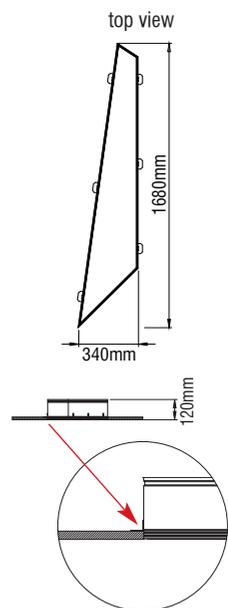

# ARCHITECTURAL RECESSED LUMINAIRES



- High efficient opal plexiglass cover.
- Suspension brackets included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:  
203 Lm/W at 4000K 300mA  
192 Lm/W at 3000K 300mA

Code	Description
82170221	Box As 424 LED 49W Warm
82170231	Box As 424 LED 49W Neutral

For dimmer version add letter "D" at the end of product code.



- High efficient opal plexiglass cover.
- Suspension brackets included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:  
203 Lm/W at 4000K 300mA  
192 Lm/W at 3000K 300mA

Code	Description
82170121	Box As 224 LED 28W Warm
82170131	Box As 224 LED 28W Neutral

For dimmer version add letter "D" at the end of product code.



- High efficient opal plexiglass cover.
- Suspension brackets included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:  
203 Lm/W at 4000K 300mA  
192 Lm/W at 3000K 300mA

Code	Description
82170321	Box As 254 LED 69W Warm
82170331	Box As 254 LED 69W Neutral

For dimmer version add letter "D" at the end of product code.