

BOX combines stringent basic geometry with perfect contemporary style. Uniformly illuminated, without annoying reflections, it gives a strong architectural identity to various working areas (offices, stores, houses etc). It is available in five dimensions: 300, 400, 620, 920 and 1200mm.

Technical Features



- Aluminium body, painted electrostatically in selected colour.
- Aluminium spot base, painted electrostatically in selected colour.
- Opal plexi glass cover.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V-50/60Hz.

Upon Request



- Connection for emergency lighting system, for one or three hours.

BOX



BOX AVRA 300 LED



BOX AVRA 400 LED



BOX AVRA 640 LED

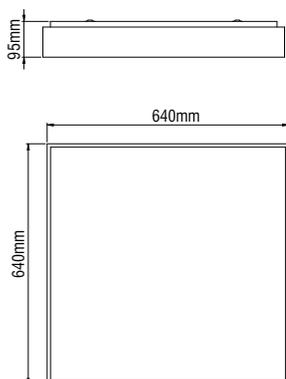

ARCHITECTURAL SURFACE & PENDANT LUMINAIRES



- High efficient opal plexiglass cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
126 Lm/W at 4000K
120 Lm/W at 3000K

Code	Description
8219012	Box Avra 300 LED 22W Warm
8219013	Box Avra 300 LED 22W Neutral

For dimmer version add letter "D" at the end of product code.



- High efficient opal plexiglass cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description
8219052	Box Avra 400 LED 29W Warm
8219053	Box Avra 400 LED 29W Neutral

For dimmer version add letter "D" at the end of product code.





- High efficient opal plexiglass cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
189 Lm/W at 4000K 350mA
182 Lm/W at 3000K 350mA

Code	Description
8219092	Box Avra 640 LED 33W Warm
8219093	Box Avra 640 LED 33W Neutral

For dimmer version add letter "D" at the end of product code.

BOX

BOX AVRA 940 LED



ARCHITECTURAL SURFACE & PENDANT LUMINAIRES




- High efficient opal plexiglass cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
206 Lm/W at 4000K 250mA
195 Lm/W at 3000K 250mA

Code	Description
8219132	Box Avra 940 LED 96W Warm
8219133	Box Avra 940 LED 96W Neutral

For dimmer version add letter "D" at the end of product code.

BOX AVRA 1200 LED

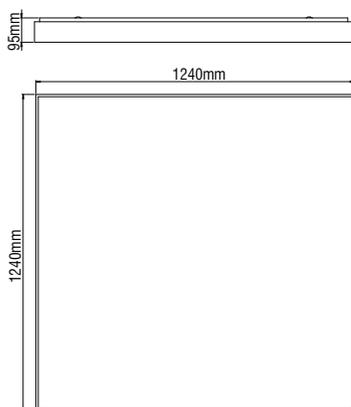

- High efficient opal plexiglass cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
189 Lm/W at 4000K 350mA
182 Lm/W at 3000K 350mA



Code	Description
8219172	Box Avra 1200 LED 132W Warm
8219173	Box Avra 1200 LED 132W Neutral

For dimmer version add letter "D" at the end of product code.



BOX AS

BOX AS 424 LED





- High efficient opal plexiglass cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description
8215022	Box As 424 LED 49W Warm
8215023	Box As 424 LED 49W Neutral

For dimmer version add letter "D" at the end of product code.

BOX AS 224 LED






- High efficient opal plexiglass cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description
8215012	Box As 224 LED 28W Warm
8215013	Box As 224 LED 28W Neutral

For dimmer version add letter "D" at the end of product code.


BOX AS 254 LED

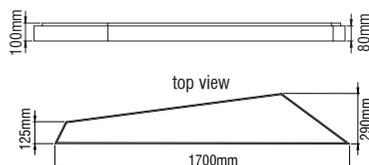

- High efficient opal plexiglass cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description
8215032	Box As 254 LED 69W Warm
8215033	Box As 254 LED 69W Neutral

For dimmer version add letter "D" at the end of product code.

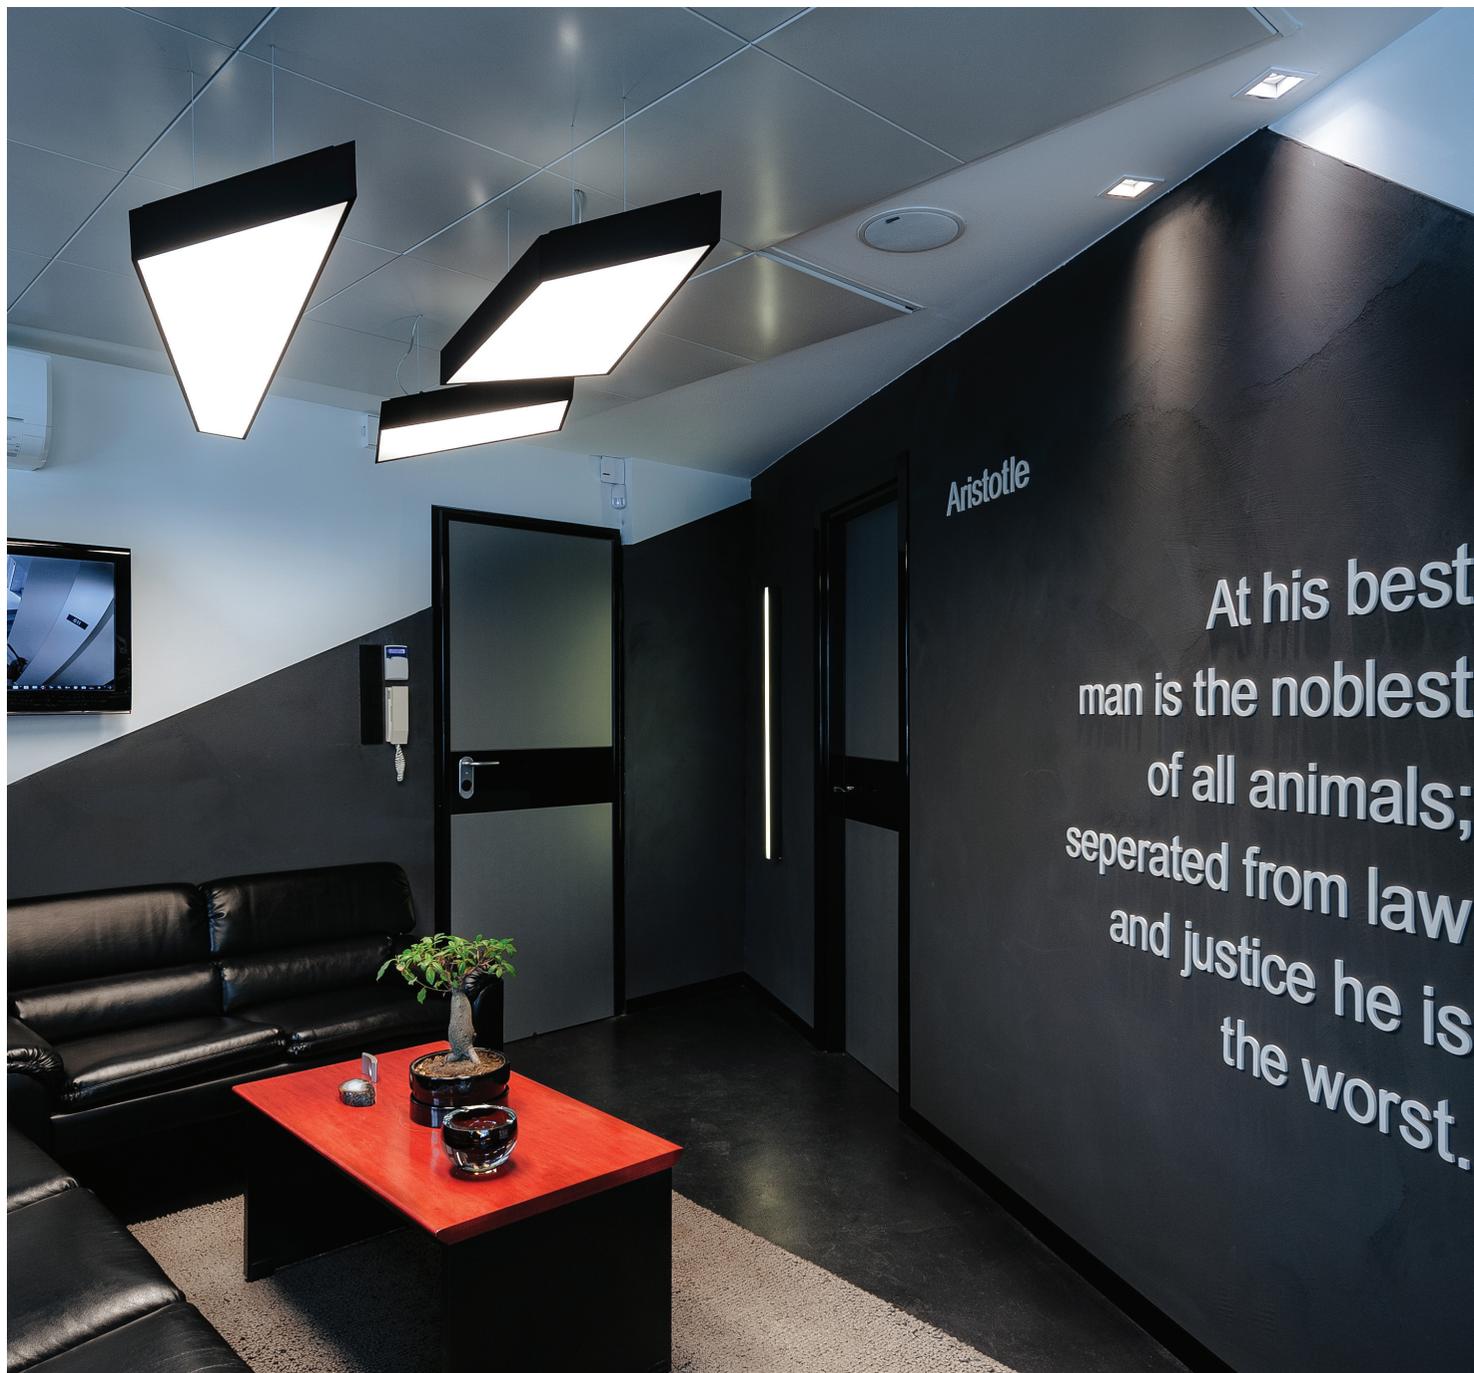

POWER SUPPLY



- Plastic body.
- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.

Colour Codes:

0	Colours	1	White	2	Titan	3	Black
---	---------	---	-------	---	-------	---	-------

Code	Description	L	Kg
900122	Power Supply 3x0,75mm ² with Rosette Ø75 1000	1000	0,120
900124	Power Supply 3x0,75mm ² with Rosette Ø75 2000	2000	0,240
900126	Power Supply 3x0,75mm ² with Rosette Ø75 3000	3000	0,360
900127	Power Supply 3x0,75mm ² with Rosette Ø75 4000	4000	0,500
900162	Power Supply 5x0,50mm ² with Rosette Ø75 1000	1000	0,120
900164	Power Supply 5x0,50mm ² with Rosette Ø75 2000	2000	0,240
900166	Power Supply 5x0,50mm ² with Rosette Ø75 3000	3000	0,360
900167	Power Supply 5x0,50mm ² with Rosette Ø75 4000	4000	0,500