

This luminaire is an impressive combination of low investment cost, high efficiency and usability.

The direct/indirect light distribution and the high light output ratios are two advantages that give Volaris a wide range of possible applications, especially in offices, communication rooms and training facilities. The spots, which can be separately switched, give the user maximum design freedom and satisfy the requirement for possible accent lighting on workplace.

The VOLARIS pendant provides perfect lighting comfort and uniform, glare-free lighting. The luminaire unit impresses with its low profile, while slim-line design is emphasised by its curved soft contours.

Technical Features

- Body of aluminum profile, painted electrostatically in selected colour.
- High efficient satin opal cover.
- Opal upside cover.
- With or without spot selection for pendant version.
- Adjustable suspension consisting of stainless steel cable and regulators.
- Pure light without IR/UV radiation.
- Connection for operation on 230V-50/60Hz with electronic ballast.
- SDCM: 3 / Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).


Upon Request

- Connection for emergency lighting system, for one or three hours.
- For surface mounted.

VOLARIS

PROFESSIONAL SURFACE & PENDANT LUMINAIRES

VOLARIS PLEXI LED 170



L
22/33W = 1266
32/49W = 1780




- High efficient satin PMMA cover.
- Suspensions and power supply with cable 1,5m, included.
- CRI: min. 80
- Luminous Efficacy:
201 Lm/Watt 4000K at 350mA
189 Lm/Watt 3000K at 350mA


Code	Description
8251804	Volaris Plexi Led 170 33W Neutral
8251806	Volaris Plexi Led 170 49W Neutral
8251810	Volaris Plexi Led 170 33W Warm
8251812	Volaris Plexi Led 170 49W Warm

For dimmer version add letter "D" at the end of product code.

VOLARIS PLEXI LED 170 SPOTS



L
22/33W = 1394
32/49W = 1954



- High efficient satin PMMA cover.
- Suspensions and power supply with cable 1,5m, included.
- CRI: min. 80
- Luminous Efficacy:
201 Lm/Watt 4000K at 350mA
189 Lm/Watt 3000K at 350mA

Code	Description
8252804	Volaris Plexi Led 170 33W Neutral+2xPAR16/GU10
8252806	Volaris Plexi Led 170 49W Neutral+2xPAR16/GU10
8252810	Volaris Plexi Led 170 33W Warm+2xPAR16/GU10
8252812	Volaris Plexi Led 170 49W Warm+2xPAR16/GU10

For dimmer version add letter "D" at the end of product code.


Colour Codes:

0 Colours 1 White 2 Titan 3 Black 5* matt Alum.


* Excluded: Volaris with spots

VOLARIS

VOLARIS PLEXI LED 230



PROFESSIONAL SURFACE & PENDANT LUMINAIRES

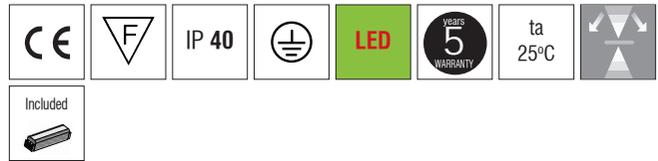

- High efficient satin PMMA cover.
- Suspensions and power supply with cable 1,5m, included.
- CRI: min. 80
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

High Efficiency

Code	Description
8255804	Volaris Plexi Led 230 66W Neutral
8255806	Volaris Plexi Led 230 98W Neutral
8255810	Volaris Plexi Led 230 66W Warm
8255812	Volaris Plexi Led 230 98W Warm

For dimmer version add letter "D" at the end of product code.

Colour Codes:

0 Colours 1 White 2 Titan 3 Black 5* matt Alum.

* Excluded: Volaris with spots

VOLARIS

PROFESSIONAL SURFACE & PENDANT LUMINAIRES

