



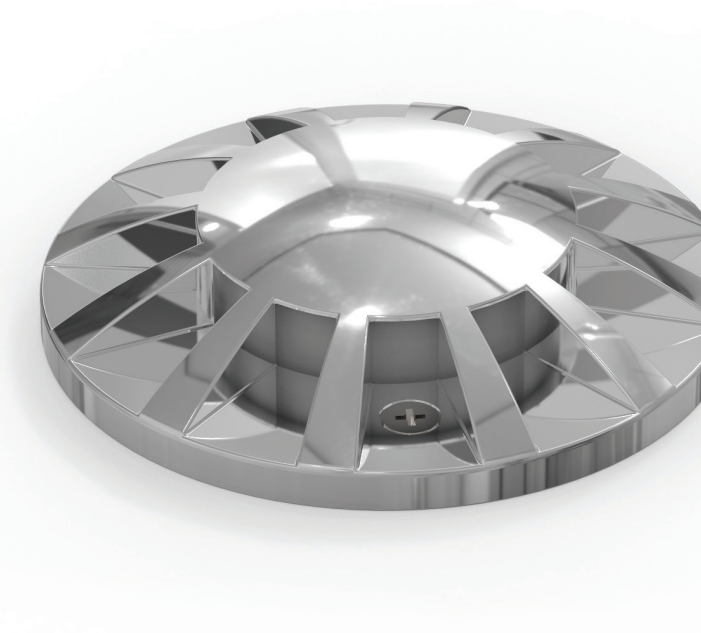

Technical Features

- Aluminium or stainless steel body.
- Thermoplastic mounting base.
- Tempered protection glass.
- Silicon gasket.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).



Note: For the proper installation of the fitting an effective drainage as well as a 20-30cm deep layer of gravel must be intended for dewatering.



To ensure the degree of protection the use of flexible power supply cable type H07RN-F is required.

Temperature on glass surface.

LITHOS

LITHOS S

OUTDOOR

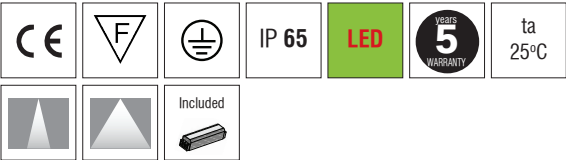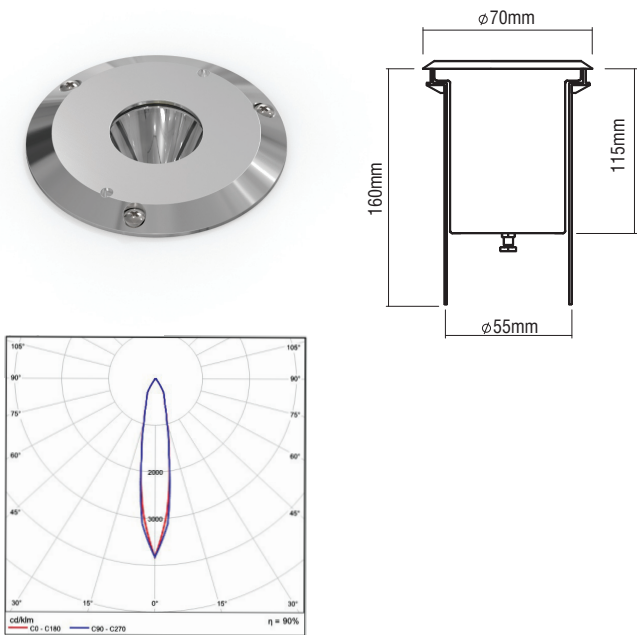


- Aluminium body.
- High efficient reflectors in Medium and Wide versions.
- Tempered protection glass.
- Silicon gasket.
- Thermoplastic housing.
- 230V/50Hz.
- Supplied with 3x0,75mm NEOPRENE 1m cable.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
5W 4000K 100 Lm/Watt 500mA
5W 3000K 96 Lm/Watt 500mA

- Roll over weight  max. 1000kg with minimum speed drive 20km/h.

Code	Description	Kg
84230	LITHOS S LED 5W IP65	0,800

LITHOS M1



- Inox stainless steel body and trim.
- Tempered protection glass.
- Silicon gasket.
- Thermoplastic housing.
- 230V/50Hz.
- Supplied with 2x0,75mm NEOPRENE 1m cable.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
3W 4000K 107 Lm/Watt 350mA
3W 3000K 100 Lm/Watt 350mA

- Roll over weight  max. 1000kg with minimum speed drive 20km/h.


Code	Description	Kg
842315	LITHOS M1 LED 3W IP67 Neutral	0,800
842325	LITHOS M1 LED 3W IP67 Warm	0,800
800036	LED DRIVER 350mA 18W IP67*	0,100

* Suitable from 1 up to 5 luminaires.

LITHOS

LITHOS M2

OUTDOOR





- Inox stainless steel body and trim.
- Tempered protection glass.
- Silicon gasket.
- Thermoplastic housing.
- 230V/50Hz.
- Supplied with 2x0,75mm NEOPRENE 1m cable.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4W 4000K 135 Lm/Watt 350mA
4W 3000K 127 Lm/Watt 350mA

- Roll over weight  max. 1000kg with minimum speed drive 20km/h.

Code	Description	Kg
842335	LITHOS M2 LED 4W IP67 Neutral	0,800
842345	LITHOS M2 LED 4W IP67 Warm	0,800
800036	LED DRIVER 350mA 18W IP67*	0,100

* Suitable from 1 up to 5 luminaires.

LITHOS M3

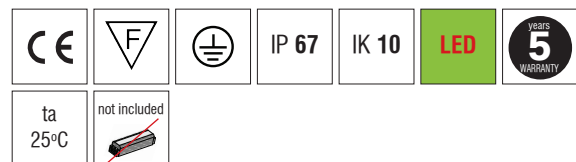

- Inox stainless steel body and trim.
- Tempered protection glass.
- Silicon gasket.
- Thermoplastic housing.
- 230V/50Hz.
- Supplied with 2x0,75mm NEOPRENE 1m cable.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4W 4000K 135 Lm/Watt 350mA
4W 3000K 127 Lm/Watt 350mA


- Roll over weight  max. 1000kg with minimum speed drive 20km/h.

Code	Description	Kg
842355	LITHOS M3 LED 4W IP67 Neutral	0,800
842365	LITHOS M3 LED 4W IP67 Warm	0,800
800036	LED DRIVER 350mA 18W IP67*	0,100

* Suitable from 1 up to 5 luminaires.

LITHOS

LITHOS M4




- Inox stainless steel body and trim.
- Tempered protection glass.
- Silicon gasket.
- Thermoplastic housing.
- 230V/50Hz.
- Supplied with 2x0,75mm NEOPRENE 1m cable.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4W 4000K 135 Lm/Watt 350mA
4W 3000K 127 Lm/Watt 350mA

- Roll over weight  max. 1000kg with minimum speed drive 20km/h.

Code	Description	Kg
842375	LITHOS M4 LED 4W IP67 Neutral	0,800
842385	LITHOS M4 LED 4W IP67 Warm	0,800
800036	LED DRIVER 350mA 18W IP67*	0,100

* Suitable from 1 up to 5 luminaires.

LITHOS M5



- Inox stainless steel body and trim.
- Tempered protection glass.
- Silicon gasket.
- Thermoplastic housing.
- 230V/50Hz.
- Supplied with 2x0,75mm NEOPRENE 1m cable.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4W 4000K 135 Lm/Watt 350mA
4W 3000K 127 Lm/Watt 350mA

- Roll over weight  max. 1000kg with minimum speed drive 20km/h.



Code	Description	Kg
842395	LITHOS M5 LED 4W IP67 Neutral	0,800
842405	LITHOS M5 LED 4W IP67 Warm	0,800
800036	LED DRIVER 350mA 18W IP67*	0,100

* Suitable from 1 up to 5 luminaires.

LITHOS

LITHOS L

OUTDOOR



CE	F	⊕	IP 67	IK 10	LED	5 YEARS WARRANTY
ta 25°C			Included			

- Inox stainless steel body and trim.
- High efficient reflectors in Medium and Wide versions.
- Tempered protection glass.
- Silicon gasket.
- 230V/50Hz.
- Supplied with 3x0,75mm NEOPRENE 1m cable.
- CRI: min. 80 / SDCM: 3
- 23W power consumption driven at 600mA.
- Luminous Efficacy:
23W 4000K 144 Lm/Watt
23W 3000K 137 Lm/Watt

- Roll over weight  max. 2000kg with minimum speed drive 20km/h.

Code	Description	Kg
84241   5	LITHOS L LED 23W IP67	4,000

LED COLOUR CODES:	BEAM CODES:
 2 Warm  3 Neutral	 01 spot  02 medium  03 wide



