

PYROS with its elegance style and its high IP protection degree (IP65), present itself as an ideal solution for illuminating squares, parks, gardens etc.



Technical Features

- Body from aluminium profile, painted electrostatically in selected colour.
- Silicon gaskets.
- Stainless steel screws.
- Accessories for floor or ground installation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).



PYROS

PYROS MINI

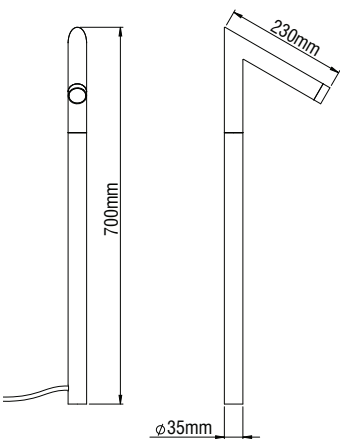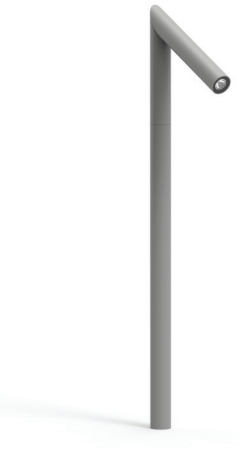


OUTDOOR



- Aluminium body.
- Beam: Wide.
- 6W power consumption driven at 350mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
6W: 4000 K: 112 Lm/Watt
6W: 3000 K: 100 Lm/Watt

Code	Description	Kg
84425	Pyros Mini 6W Neutral	1,300
84426	Pyros Mini 6W Warm	1,300

PYROS

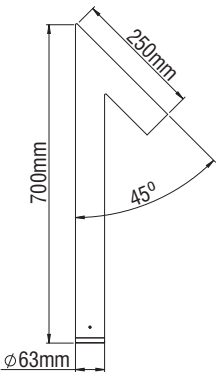

- Aluminium body.
- Beam: Diffuser.
- Connection for operation in 230V/50Hz.
- Dimmer Phase Cut.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4W: 4000 K: 122 Lm/Watt
4W: 3000 K: 115 Lm/Watt
8W: 4000 K: 116 Lm/Watt
8W: 3000 K: 110 Lm/Watt

Code	Description	Kg
84421	Pyros 4W Neutral	1,500
84422	Pyros 4W Warm	1,500
84423	Pyros 8W Neutral	1,500
84424	Pyros 8W Warm	1,500


Colour Codes:

0 Colours 1 White 2 Titan 3 Black

PYROS


OUTDOOR

PYROS MINI ACCESSORIES

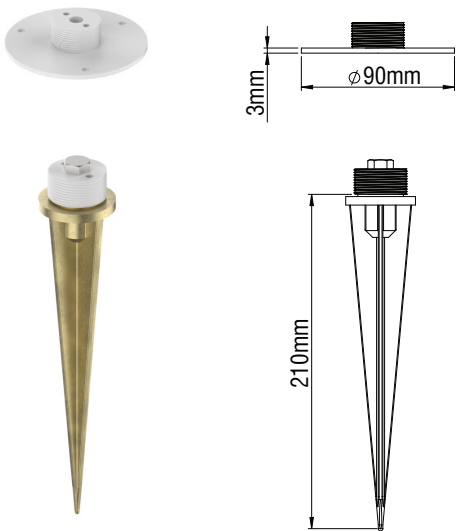

Code	Description	Kg
80462	Base PYROS MINI (for floor installation)	0,050
804609	Picket PYROS MINI (for ground installation)	0,100

PYROS ACCESSORIES

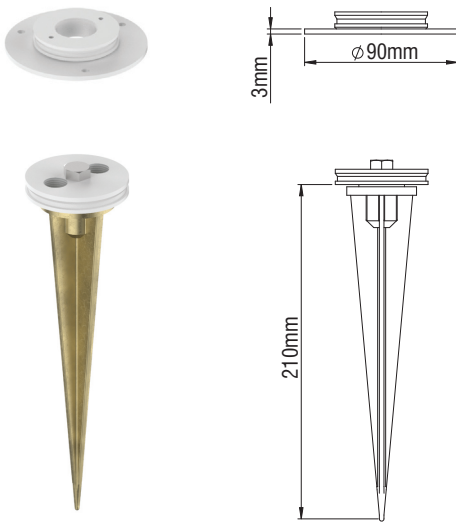

Code	Description	Kg
80461	Base PYROS (for floor installation)	0,050
804607	Picket PYROS (for ground installation)	0,100

Colour Codes:

0

Colours

1

White

2

Titan

3

Black

