


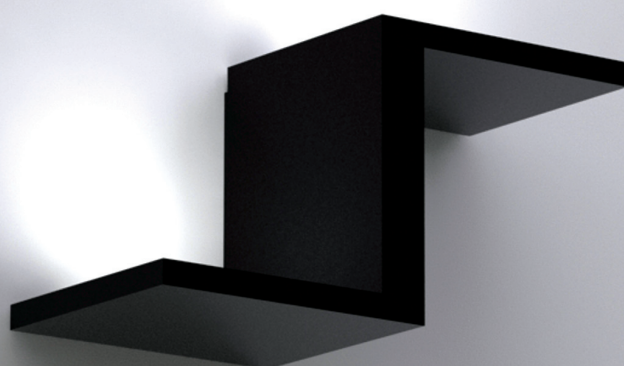

*Surface wall mounted luminaire with led chip,
ideal for a wide range of indoor applications.
Available in four different shapes.
It is suitable for areas where soft illumination and more
architectural style is required.*



Technical Features

- Aluminium body, painted electrostatically in selected colour.
- Steel mounting base.
- PMMA cover.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation with 230V/50Hz.

MINI APPLIQUES

WALL LIGHTING INTERIOR


GEA



- Aluminium body.
- Satin PMMA cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4W: 4000 K: 122 Lm/Watt
4W: 3000 K: 115 Lm/Watt

Code	Description
85827	Gea 1x4W Warm
85828	Gea 1x4W Neutral



DIONI



- Aluminium body.
- Satin PMMA cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4W: 4000 K: 122 Lm/Watt
4W: 3000 K: 115 Lm/Watt

Code	Description
85829	Dioni 2x4W Warm
85830	Dioni 2x4W Neutral


FIVI



- Aluminium body.
- Satin PMMA cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4W: 4000 K: 122 Lm/Watt
4W: 3000 K: 115 Lm/Watt

Code	Description
85831	Fivi 2x4W Warm
85832	Fivi 2x4W Neutral

IRO



- Aluminium body.
- Satin PMMA cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4W: 4000 K: 122 Lm/Watt
4W: 3000 K: 115 Lm/Watt

Code	Description
85833	Iro 2x4W Warm
85834	Iro 2x4W Neutral

Colour Codes:			
0	Colours	1	White
2	Titan	3	Black