



*ROLLER is surface mounted or suspended luminaire with cylindrical shape.
It can be produced with different heights upon request.
Due to it's high protection degree (IP54 and IP65)
it can also be used as an outdoor luminaire for facade lighting.*


Technical Features

- Aluminium body.
- High efficient reflectors in Spot, Medium, Wide versions and tempered protection glass.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).

Upon request:

Available with highest colour rendering index (CRI)

For IP65 editions




H07RN-F

To ensure the degree of protection (sealing), the use of flexible power supply cable type H07RN-F (in appropriate diameter) is required.


ROLLER

OUTDOOR



ROLLER MINI 5 LED IP65

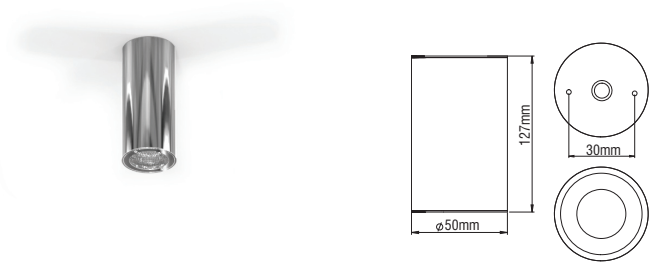

MEDIUM




WIDE

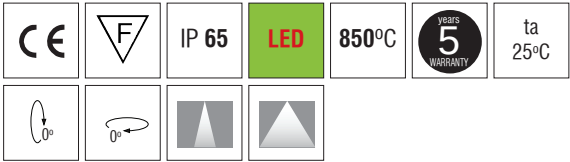


- Aluminium body, painted electrostatically in selected colour or plated.
- High efficient reflectors in Medium and Wide versions.
- Tempered protection glass.
- Silicon gasket.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
5W: 4000 K: 116 Lm/Watt
5W: 3000 K: 109 Lm/Watt

Code	Description	Kg
88006	ROLLER MINI 5 LED 5W IP65	0,700



ROLLER MINI 7 LED IP65

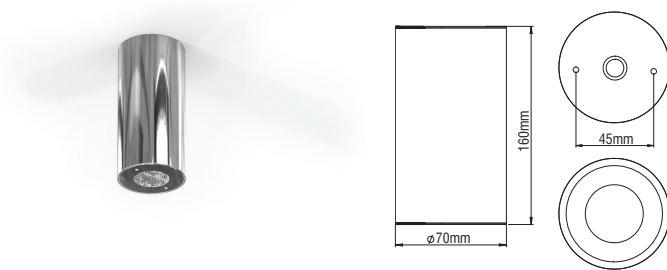

MEDIUM



WIDE

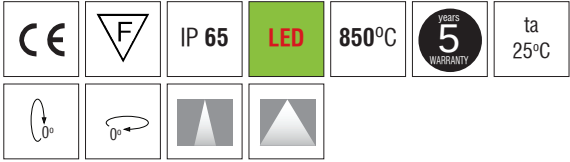



- Aluminium body, painted electrostatically in selected colour or plated.
- High efficient reflectors in Medium or Wide versions.
- Tempered protection glass.
- Silicon gasket.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
8W: 4000 K: 119 Lm/Watt
8W: 3000 K: 114 Lm/Watt

Code	Description	Kg
88007	ROLLER MINI 7 LED 8W IP65	1,000

ROLLER



ROLLER 10 GU10 IP54

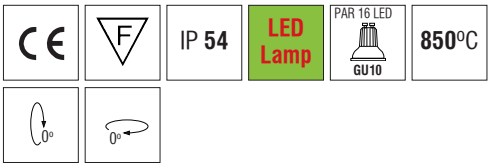

- Aluminium body, painted electrostatically in selected colour or plated.
- Tempered protection glass.
- GU10 LED lamp.

Code	Description	Kg
88049	ROLLER 10 GU10 IP54	0,600


ROLLER 12 LED SHORT IP54

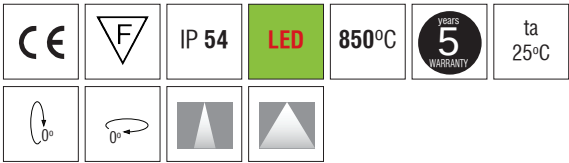


- Aluminium body, painted electrostatically in selected colour or plated.
- High efficient reflectors in Spot, Medium and Wide versions.
- Tempered protection glass.
- 230V/50Hz module.
- Dimmer Phase Cut.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
20W: 4000 K: 95 Lm/Watt
20W: 3000 K: 90 Lm/Watt

Code	Description	Kg
88019	ROLLER 12 LED 20W SHORT IP54	1,500


SPOT



MEDIUM



WIDE



LED COLOUR CODES:	BEAM CODES:	Colour Codes:
2 Warm 3 Neutral	01 spot 02 medium 03 wide	0 Colours 1 White 2 Titan 3 Black 4 Chrome 5 matt Alum.