



ERIS is a range of surface mounted square luminaires, with the LED lamp or the light source deep inside. Eris 1 is the smaller one and it has no rotation. Eris 2 is adjustable with symmetric distribution and Eris 3 is also adjustable but with asymmetric distribution. All of them can be produced with different heights upon request.

Technical Features

- Steel body (or aluminium body for plated editions).
- Inner ring from aluminium with clips for easy lamp replacement.

For LED Version


- Pure light without IR/UV radiation.
- Die cast aluminum heatsink anodized.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation with Constant Current.

Upon request:

Available with highest colour rendering index (CRI)

ERIS



ERIS 1

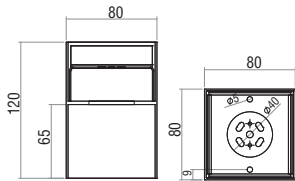

- Version for PAR 16 LED GU10 lamp.
- Aluminium body.
- Inner part in black colour at standard version.
- 230V/50Hz.

Code	Description	Kg
88011	ERIS 1 PAR16 LED GU10	0,350


ERIS 1 ASYM

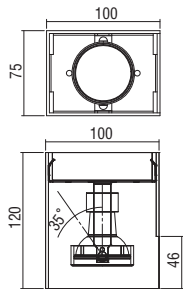

- Version for PAR 16 LED GU10 lamp.
- Aluminium body.
- Inner part in black colour at standard version.
- 230V/50Hz.

Code	Description	Kg
88009	ERIS 1 ASYM PAR16 LED GU10	0,450

ERIS 1 DOUBLE

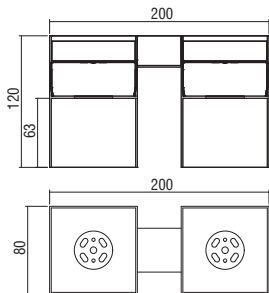


- Version for PAR 16 LED GU10 lamp.
- Aluminium body.
- Inner part in black colour at standard version.
- 230V/50Hz.

Code	Description	Kg
88018	ERIS 1 DOUBLE 2x PAR16 LED GU10	0,850


* Colour Codes: 0 Colours 1 White 2 Titan 3 Black

ERIS


ERIS 2 SYM

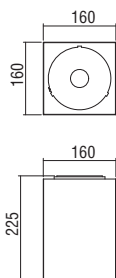


SPOT

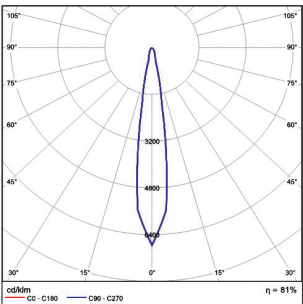


MEDIUM

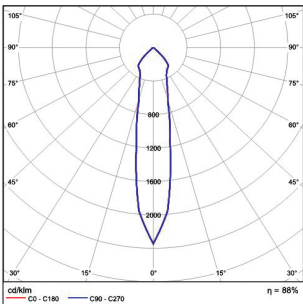

WIDE

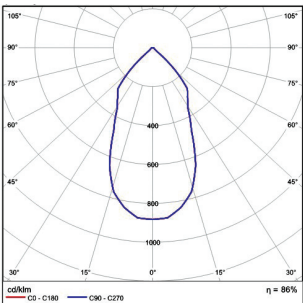

Surface & Pendant Spotlights

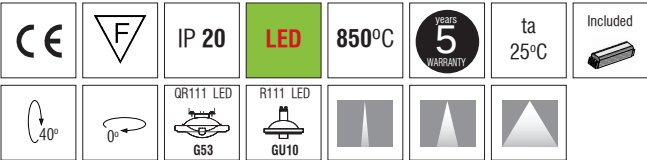

- Version for LED CHIP.
- Inner adjustable ring from aluminium with clips for easy lamp replacement.

For LED CHIP Version


- High pure aluminium reflectors in Spot, Medium, Wide versions.
- 19W power consumption driven at 500mA.
- CRI: min. 80 / SDCM: 3.
- Luminous Efficacy:
19W: 4000 K: 156 Lm/Watt
19W: 3000 K: 149 Lm/Watt

Code	Description	Kg
88012	ERIS 2 SYM. LED 1x75W LED QR111/G53	1,500
88415	ERIS 2 SYM. LED R111/GU10	1,500
88416	ERIS 2 SYM. LED CHIP 19W	2,000


* For dimmer version add letter "D" at the end of product code.

ERIS


ERIS 2 SYM 140

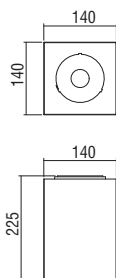


SPOT

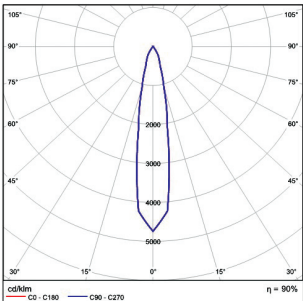



MEDIUM

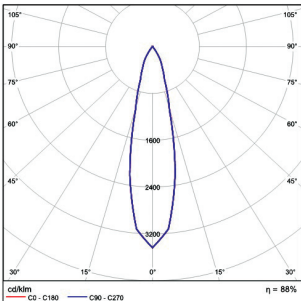

WIDE

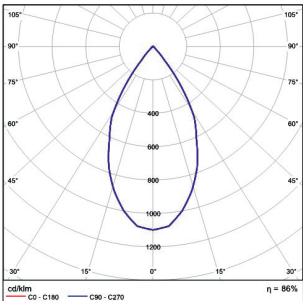


ERIS 3 ASYM

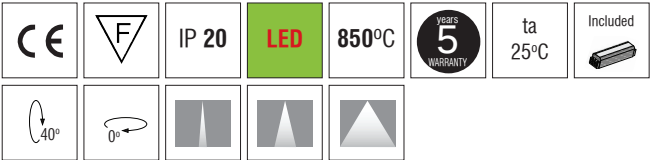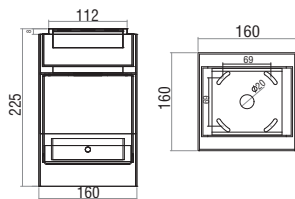

- Version for LED CHIP.
- High pure aluminium reflectors in Spot, Medium, Wide versions.
- 12W power consumption driven at 350mA.
- CRI: min. 80 / SDCM: 3.
- Luminous Efficacy:
12W: 4000 K: 174 Lm/Watt
12W: 3000 K: 167 Lm/Watt

Code	Description	Kg
88467	ERIS 2 SYM. 140 LED CHIP 12W	2,000

For dimmer version add letter "D" at the end of product code.


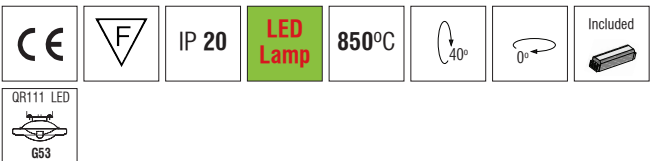


- Asymmetrical version for LED QR111 G53.
- Inner adjustable ring from aluminium with clips for easy lamp replacement.
- Inner part in black colour at standard version.

Code	Description	Kg
88015	ERIS 3 ASYM. LED 1x75W LED QR111/G53	1,500

ERIS

ERIS 4 SYM

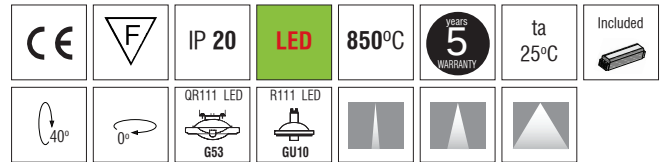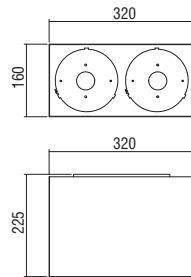

- Version for LED CHIP.
- Inner adjustable ring from aluminium with clips for easy lamp replacement.



For LED CHIP Version

- High pure aluminium reflectors in Spot, Medium, Wide versions.
- 19W power consumption driven at 500mA.
- CRI: min. 80 / SDCM: 3.
- Luminous Efficacy:
2x19W: 4000 K: 156 Lm/Watt
2x19W: 3000 K: 149 Lm/Watt

Code	Description	Kg
88449	ERIS 4 SYM. LED 2x75W LED QR111/G53	2,900
88452	ERIS 4 SYM. LED R111/GU10	2,900
88453	ERIS 4 SYM. LED CHIP 19W	3,900

* For dimmer version add letter "D" at the end of product code.



ERIS 5 ASYM

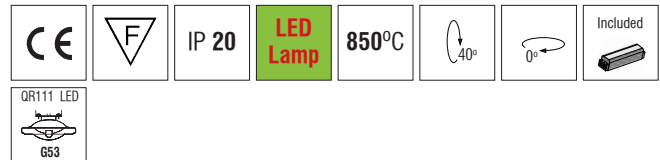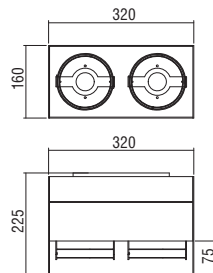

- Asymmetrical version for LED QR111 G53.
- Inner adjustable ring from aluminium with clips for easy lamp replacement.
- Inner part in black colour at standard version.

Code	Description	Kg
88458	ERIS 5 ASYM. LED 2x75W LED QR111/G53	3,000

ERIS - SUSPENSION

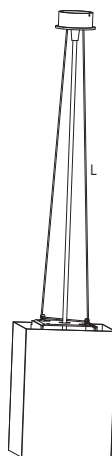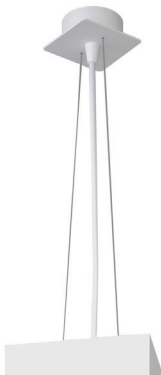

- Double adjustable suspension of stainless steel cable and regulators.
- Power supply for suspended fittings consisting of an aluminium rosette and transparent cable 3x0,75mm² or 5x0,5mm² for dimmer version.

Code	Description	Kg
80801	Eris Suspension with Power Supply 70x70	0,400
80802	Eris Suspension with Power Supply 100x100 dimmer	0,450

LED COLOUR CODES:

2 Warm 3 Neutral

BEAM CODES:

00 diffuser 01 spot 02 medium 03 wide

Colour Codes:

0 Colours 1 White 2 Titan 3 Black 4 Chrome 5 matt Alum.

