



*NANO is an minimal applique with LED source.  
It is ideal for hotels, reception halls, bars, restaurants, houses etc.*


## Technical Features

- Body from aluminium profile painted electrostatically in selected colour or plated.
- Mounting base from aluminium, painted electrostatically in selected colour or plated.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation with 230V/50Hz.


## Upon request:

Available with highest colour rendering index (CRI)


**SPOT**



**MEDIUM**





**WIDE**



# NANO



## NANO 3 - APPLIQUE

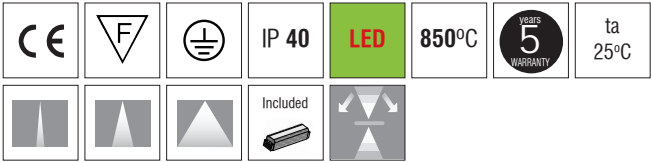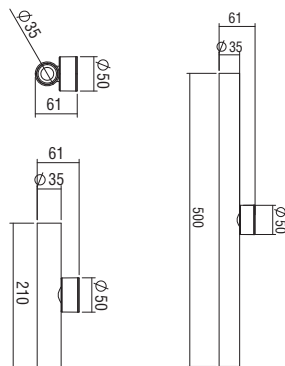

- Applique version for LED CHIP.
- Aluminium body.
- 230V/50Hz.
- 3W power consumption driven at 350mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:  
3W: 4000 K: 164 Lm/Watt  
3W: 3000 K: 154 Lm/Watt

Code	Description	Kg
88052	NANO 3 LED APPLIQUE 2x3W 21cm	0,600
88053	NANO 3 LED APPLIQUE 2x3W 50cm	0,850

## NANO 3 SQ - APPLIQUE

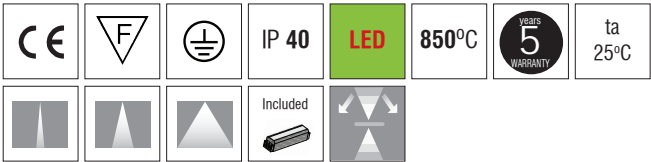

- Applique version for LED CHIP.
- Aluminium body.
- 230V/50Hz.
- 3W power consumption driven at 350mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:  
3W: 4000 K: 164 Lm/Watt  
3W: 3000 K: 154 Lm/Watt

Code	Description	Kg
88072	NANO 3 SQ LED APPLIQUE 2x3W 21cm	0,600
88073	NANO 3 SQ LED APPLIQUE 2x3W 50cm	0,850

Colour Codes:					
0	Colours	1	White	2	Titan
3	Black	4	Chrome	5	matt Alum.