


STREAMLIGHT

PROFESSIONAL RECESSED LUMINAIRES

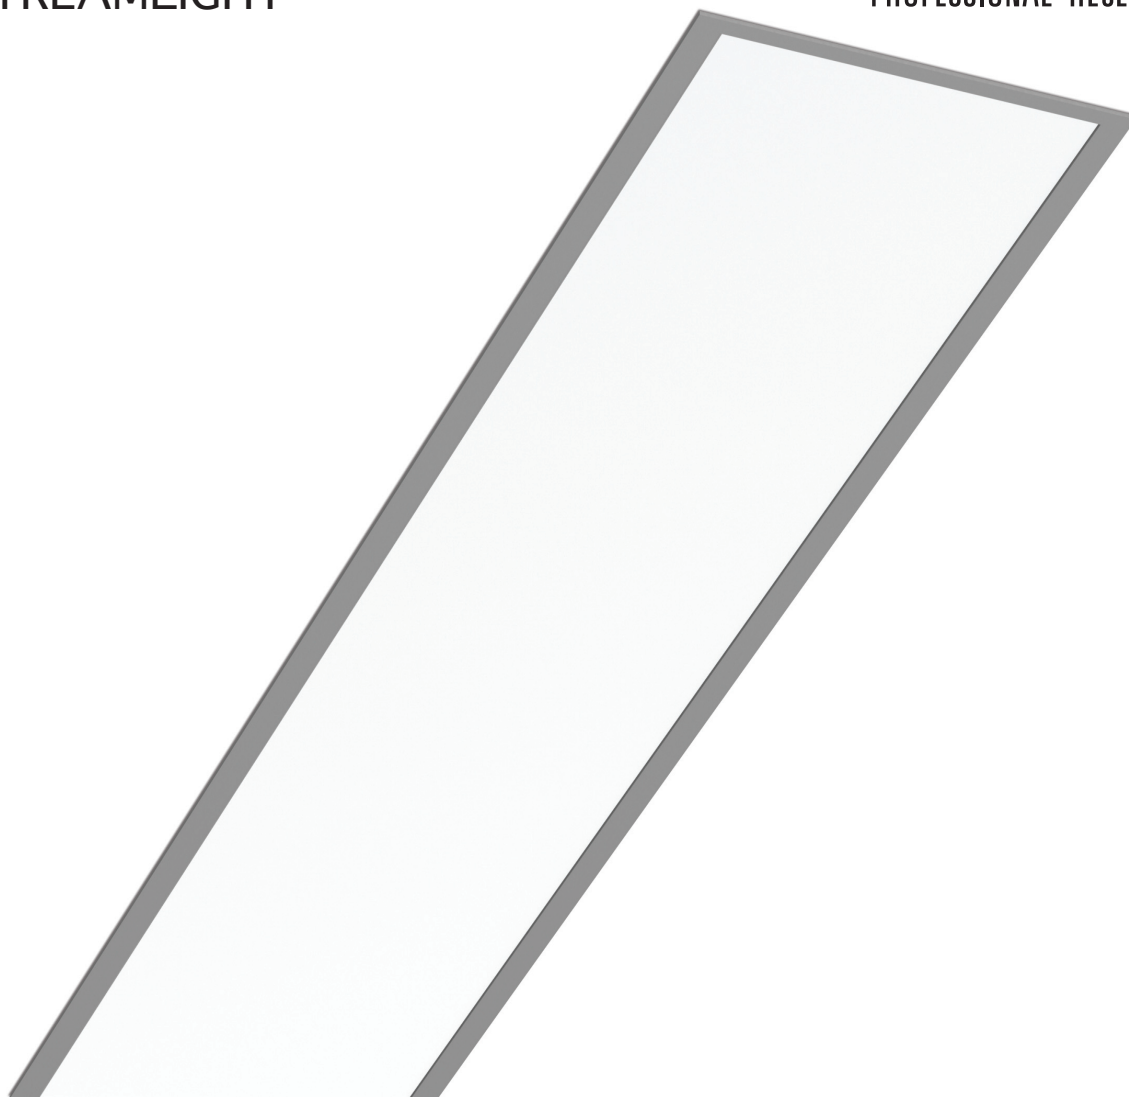

This luminaire combines the architectural style with the efficiency. It produces perfect lighting conditions without annoying reflections and that is why it can be used from entrance areas to offices.

It escapes the restrictions of the T16 lamp by using LED lighting points that can have any spacing pitch and this gives the light line enormous flexibility.

The visual benefit: The continuous-row system is illuminated absolutely uniformly from beginning to end, is economically efficient, is maintenance-free and it has long service life.

Technical Features



- Housing from aluminium profile, painted electrostatically in selected colour.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V/50-60Hz.

Upon request:

- Connection for emergency lighting system, for one or three hours.
- Available in IP54 protection version.

STREAMLIGHT

STREAMLIGHT LED

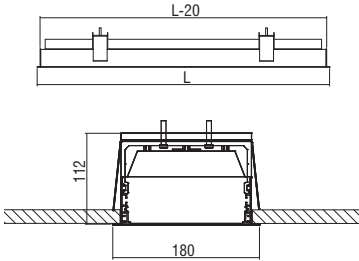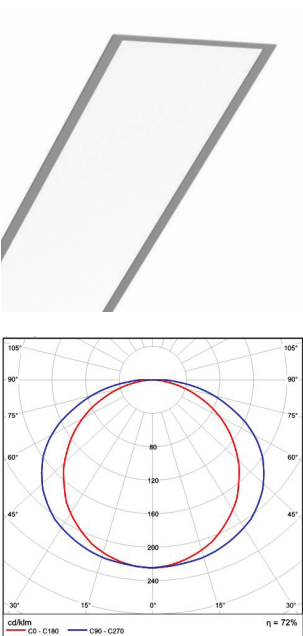

Hole		
16W	169x	602
33W	169x	1162
49W	169x	1722
65W	169x	2282

130mm





- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
93873	Streamlight Led 16W Neutral	620	1,850
93874	Streamlight Led 33W Neutral	1180	3,520
93875	Streamlight Led 49W Neutral	1740	5,200
93876	Streamlight Led 65W Neutral	2300	6,800
93877	Streamlight Led 16W Warm	620	1,850
93878	Streamlight Led 33W Warm	1180	3,520
93879	Streamlight Led 49W Warm	1740	5,200
93880	Streamlight Led 65W Warm	2300	6,800

For dimmer version add letter “D” at the end of product code.

STREAMLIGHT ANAGLYPH LED

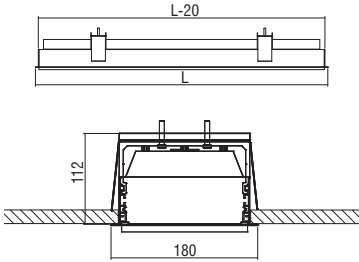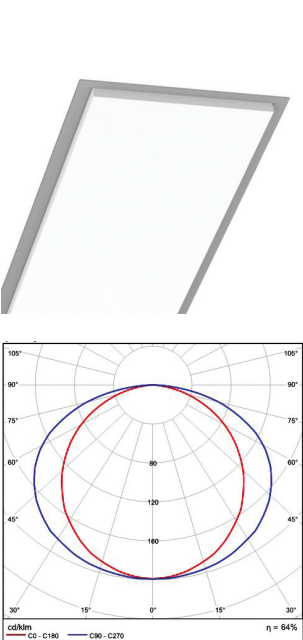

Hole		
16W	169x	602
33W	169x	1162
49W	169x	1722
65W	169x	2282

130mm



- Aluminium body.
- Removable plastic heads.
- Diffuser in opal of 10mm PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
94073	Streamlight An.Led 16W Neutral	620	2,490
94074	Streamlight An.Led 33W Neutral	1180	4,730
94075	Streamlight An.Led 49W Neutral	1740	6,980
94076	Streamlight An.Led 65W Neutral	2300	9,230
94077	Streamlight An.Led 16W Warm	620	2,490
94078	Streamlight An.Led 33W Warm	1180	4,730
94079	Streamlight An.Led 49W Warm	1740	6,980
94080	Streamlight An.Led 65W Warm	2300	9,230


For dimmer version add letter “D” at the end of product code.





STREAMLIGHT

STREAMLIGHT PLEXI OPAL CARRE LED

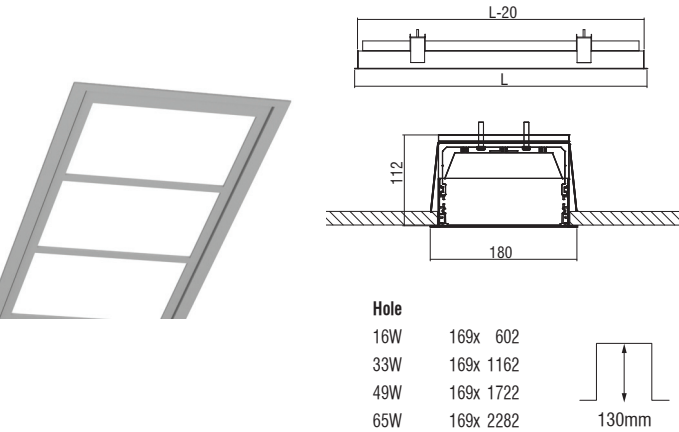

PROFESSIONAL RECESSED LUMINAIRES




- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- CRI: min. 80 / SDCM: 3
- Efficiency:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
93573	Streamlight Plexi Opal Carre Led 16W Neutral	620	1,820
93574	Streamlight Plexi Opal Carre Led 33W Neutral	1180	3,460
93575	Streamlight Plexi Opal Carre Led 49W Neutral	1740	5,080
93576	Streamlight Plexi Opal Carre Led 65W Neutral	2300	6,750
93577	Streamlight Plexi Opal Carre Led 16W Warm	620	1,820
93578	Streamlight Plexi Opal Carre Led 33W Warm	1180	3,460
93579	Streamlight Plexi Opal Carre Led 49W Warm	1740	5,080
93580	Streamlight Plexi Opal Carre Led 65W Warm	2300	6,750

For dimmer version add letter "D" at the end of product code.

STREAMLIGHT PLEXI OPAL DOUBLE LED

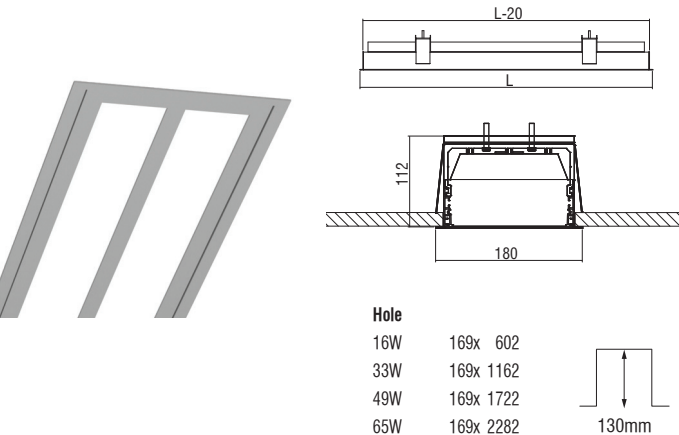

- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- CRI: min. 80 / SDCM: 3
- Efficiency:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
93673	Streamlight Plexi Opal Double Led 16W Neutral	620	1,820
93674	Streamlight Plexi Opal Double Led 33W Neutral	1180	3,460
93675	Streamlight Plexi Opal Double Led 49W Neutral	1740	5,080
93676	Streamlight Plexi Opal Double Led 65W Neutral	2300	6,750
93677	Streamlight Plexi Opal Double Led 16W Warm	620	1,820
93678	Streamlight Plexi Opal Double Led 33W Warm	1180	3,460
93679	Streamlight Plexi Opal Double Led 49W Warm	1740	5,080
93680	Streamlight Plexi Opal Double Led 65W Warm	2300	6,750



For dimmer version add letter "D" at the end of product code.

Colour Codes:

0 Colours 1 White 2 Titan 3 Black 5 matt Alum. 9 Anodized

STREAMLIGHT



STREAMLIGHT + Module 60 ARIS LED R111

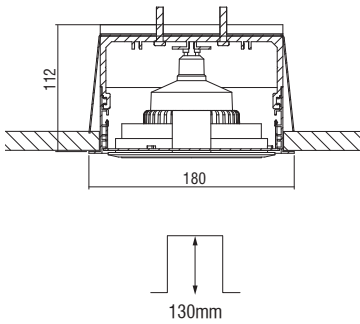

- Version for LED R111/GU10.
- Outer adjustable ring from die-cast aluminium.
- Inner ring for easy lamp replacement.
- Connection for 230V/50Hz.

Code	Description	L	Kg
93918	Streamlight Module 60 ARIS LED R111/GU10/230V	350	1,270


STREAMLIGHT + Module 60 DIAS LED

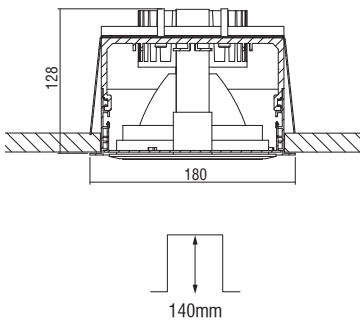


- Reflectors: Spot, Medium, Wide.
- Outer adjustable ring from die-cast aluminium.
- 19W power consumption driven at 500mA.
- 26W power consumption driven at 700mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
 - 19W: 4000 K: 155 Lm/Watt
 - 19W: 3000 K: 149 Lm/Watt
 - 26W: 4000 K: 154 Lm/Watt
 - 26W: 3000 K: 148 Lm/Watt

Code	Description	L	Kg
93931	Streamlight Module 60 DIAS LED CHIP 19W	350	1,270
93932	Streamlight Module 60 DIAS LED CHIP 26W	350	1,270


DIAS SPOT



DIAS MEDIUM




DIAS WIDE



STREAMLIGHT

PROFESSIONAL RECESSED LUMINAIRES


STREAMLIGHT + Module 60 KRONOS LED

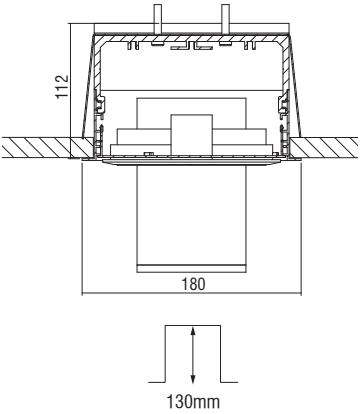


- Reflectors: Spot, Medium, Wide.
- Outer adjustable ring from die-cast aluminium.
- Die-cast aluminium spot inside.
- 19W power consumption driven at 500mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
19W: 4000 K: 155 Lm/Watt
19W: 3000 K: 149 Lm/Watt

Code	Description	L	Kg
93939	Streamlight Module 60 KRONOS LED CHIP 19W	350	1,170


KRONOS SPOT




KRONOS MEDIUM



KRONOS WIDE




STREAMLIGHT + Module 40 HERCULES LED REFLECTOR

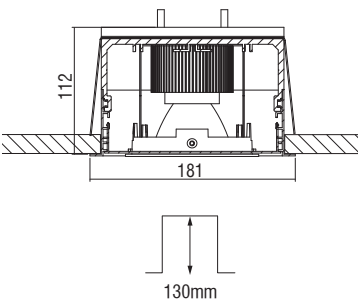


- Reflectors: Spot, Medium, Wide.
- 12W power consumption driven at 350mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
12W: 4000 K: 174 Lm/Watt
12W: 3000 K: 170 Lm/Watt

Code	Description	L	Kg
93953	Streamlight Module 40 HERCULES LED REFLECTOR 12W	350	1,580
93954	Streamlight 2x Module 40 HERCULES LED REFLECTOR 12W	550	2,480


HERCULES SPOT



HERCULES MEDIUM




HERCULES WIDE



STREAMLIGHT

PROFESSIONAL RECESSED LUMINAIRES


STREAMLIGHT + Module 40 IASON LED REFLECTOR HO

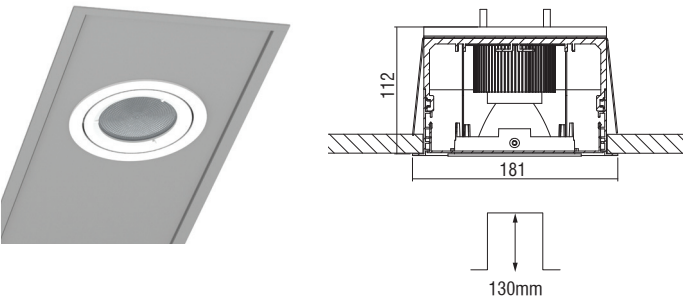

- Reflectors: Spot, Medium, Wide.
- 12W power consumption driven at 350mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
 - 12W: 4000 K: 174 Lm/Watt
 - 12W: 3000 K: 170 Lm/Watt

Code	Description	L	Kg
93955	Streamlight Module 40 IASON LED REFLECTOR HO 12W	350	1,580
93956	Streamlight 2x Module 40 IASON LED REFLECTOR HO 12W	550	2,480

STREAMLIGHT BRACKET

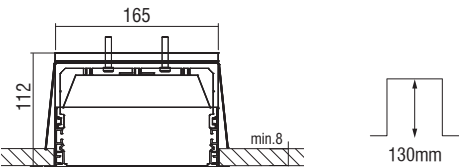

- Metal suspension bracket.
- Required 1pc per 0,5m profile length.

Code	Description	Kg
900720	Suspension Bracket Streamlight	0,270

LED COLOUR CODES:	BEAM CODES:
2 Warm 3 Neutral	01 spot 02 medium 03 wide

Colour Codes:
0 Colours 1 White 2 Titan 3 Black 5 matt Alum. 9 Anodized

